


**SUBMITTAL SHEET**

JOB NAME	ITEM TAG
JOB LOCATION	PART NUMBER
CONTRACTOR	DATE
ENGINEER APPROVAL	DATE

**PACK-JOINT X PACK-JOINT UNIONS I.P.S. X C.T.S.**


**Model T-4325**

Conforms to A.W.W.A. Specifications  
 C-800 underground service line valves and fittings  
**Working Pressure, Non Shock (PSI)**  
 Cold working pressure (CWP): 100 PSI 3/4" - 1", 80 PSI 1 1/4" - 2"



*Pictured*  
**Model T-4325**

*Pictured*  
**Model Model T-4325**  
Cut-away

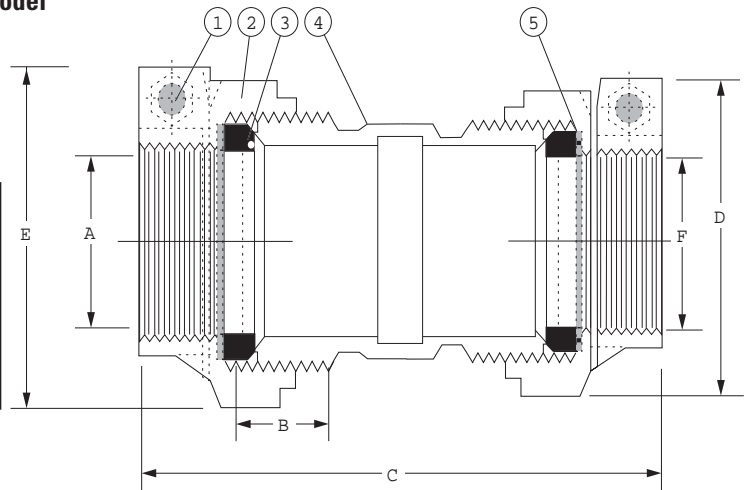

MATERIAL SPECIFICATION		
PART	MATERIAL	SPECIFICATION
1 Split clamp screw	304 Stainless steel	AISI Grade 304
2 Pack joint nut	Bronze	ASTM B62 UNS C83600
3 Gasket	Buna-n	Commercial grade
4 Body	Bronze	ASTM B62 UNS C83600/C89836
5 Anti-friction ring	Nylon	Commercial grade

DIMENSIONS						
Size	A	B	C	D	E	F
3/4"	1.10	.36	4.04	1.55	2.25	0.91
1"	1.40	.47	4.72	1.85	2.85	1.16
3/4"x1"	1.10	.36	4.25	1.55	2.25	1.16
1"x3/4"	1.40	.47	4.69	1.85	2.85	0.91