


AQUAFLO®

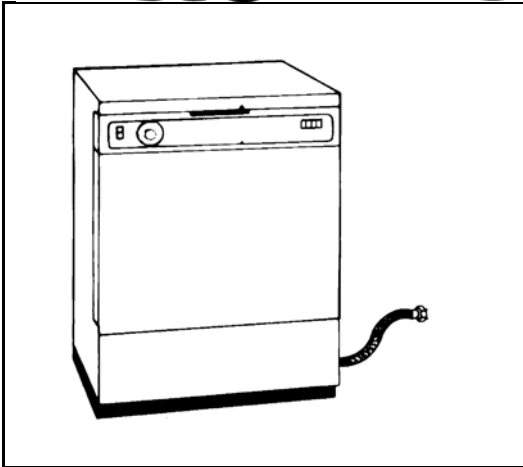

DESIGN FEATURES

- Chloramine resistant soft cones
- Exclusive POWR-TIGHT 12-point crimp-many times industry standard
- Chloramine resistant tubing
- Withstands dramatic changes in water pressure
- Easy installation, no special tools or soldering required.

MATERIAL SPECIFICATIONS

- Working Pressure: 160 psi
- Operating Temperature: 33° F - 140° F
- Tubing: Reinforced PVC, NSF 61 compliant
- Nuts & End Fittings: Nickel-Plated Brass
- Washers: NSF 61 Compliant

COMPLIANCES/LISTINGS

- IAPMO Certified
- NSF Compliant
- ASME A112.18.6



3689 Arrowhead Drive, Carson City, NV 89706
 Phone (800) 854-3215 Fax (800) 243-1777
 E-mail sales@lspproducts.com Website www.lspproducts.com

Content matter is subject to change at any time. It is the user's responsibility to ensure the most updated revisions are obtained.

AF/S-2006 (04-08) Rev 3

MIGHTYFLEX DISHWASHER CONNECTOR

Specification Sheet

PART NO.	DESCRIPTION	LENGTH
KDW-148-PP		48"
KDW-160-PP	1/2" FIP SOFT CONE X 3/8" COMP W/90° ELBOW*	60"
KDW-172-PP		72"
KDW-184-PP		84"
KDW-360-PP	1/2" COMP X 3/8" COMP W/90° ELBOW*	60"
KDW-448-PP		48"
KDW-460-PP	1/2" FIP SOFT CONE X 1/2" FIP SOFT CONE	60"
KDW-472-PP		72"
KDW-484-PP		84"
KDW-548-PP	3/8" COMPR. S.C. X 3/4" F.G.H.T. W/ 90° ELBOW* ADAPTER	48"
KDW-560-PP		60"
KDW-636-PP	3/8" COMP X 3/8" COMP W/90° ELBOW*	36"
KDW-648-PP		48"
KDW-660-PP		60"
KDW-672-PP		72"
KDW-684-PP		84"
KDW-784-PP	1/2" SOFT CONE COMP X 1/2" SOFT CONE COMP W/90° ELBOW*	84"
KDW-810-PP**	3/8" VANGUARD PEX X	10"
KDW-848-PP**		48"
KDW-872-PP**		72"

*Note: Elbow is 3/4" NPT Male x 3/8" Compression Male

**Note: use when angle stop valve is not needed (manifold system)

Product Submittal	
Job Name	
Date	
Part Number	Quantity
Architect	
Contractor	