



Commercial Fixtures

Reliable, high-performance vitreous china fixtures for any commercial application



www.mansfieldplumbing.com

mansfield.






A single source for reliable commercial products

Single source, single specification, single responsibility

Table of Contents

Flushometer Toilets	4-6
Urinals	7-8
Lavatories & Clinical Sink	9-11
Flushometer Valves	12
Commercial Packages	13
Pressure Assist Toilets	14-18

Specifying vitreous china fixtures for any commercial application can be a daunting task. Performance, reliability, accessibility, styling, water conservation and other considerations are all critical to a commercial installation. When you choose Mansfield,[®] you get products and service backed by over 80 years of commercial fixture experience and innovation.

The core of Mansfield's strength has always been our engineering and manufacturing. A leader in technology, we were first with our Quantum[®] pressure-assist toilets, and first again with the EcoQuantum[®] dual flush pressure-assist toilets (1.6 Gpf / 1.0 Gpf).

At Mansfield, we work hard to maintain our reputation for excellence and to offer an extensive commercial product line designed to accommodate today's demanding applications. We also offer the best protection in the china industry – the Mansfield Limited Lifetime Warranty.

All it takes is one call. Simple and concise. One call to source, specify, and service.



Look for this symbol designating products made with pride in the USA.

Flushometer Toilets

Mansfield® flushometer toilets deliver enhanced durability, premium performance and ADA installation options. These fixtures provide long-term dependability for many specialty applications including bariatric and healthcare settings.





ELONGATED FRONT

HET
HIGH EFFICIENCY TOILET


Adriatic™ 1319

Features

- Floor-mount flushometer toilet
- Bariatric - supports up to 1,000 lbs.
- Specifically designed for industrial, commercial and clinical applications
- Siphon-jet flushing action for exceptional flushing performance
- 1.28* or 1.6 Gpf low water consumption (*When using the proper 1.28 flushometer)
- SmartHeight™ chair height bowl for maximum comfort
- 2-1/8" glazed trapway reduces clogging
- 1-1/2" top spud
- Available in White
- MaP: 1000 grams

SmartHeight™ 

Specifications*

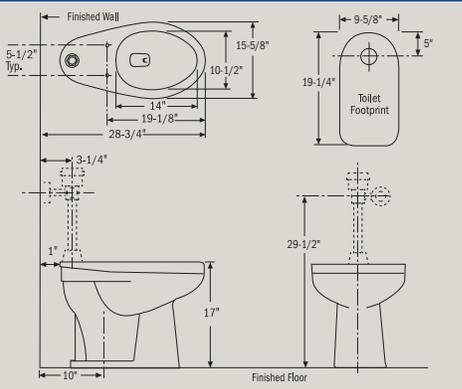



ELONGATED FRONT

HET
HIGH EFFICIENCY TOILET


Adriatic™ 1319RS

Features

- Floor-mount, rear spud flushometer toilet
- Bariatric - supports up to 1,000 lbs.
- Specifically designed for industrial, commercial and clinical applications
- Siphon-jet flushing action for exceptional performance
- 1.28* or 1.6 Gpf low water consumption (*When using the proper 1.28 flushometer)
- SmartHeight™ chair height bowl for maximum comfort
- 2" glazed trapway reduces clogging
- 1-1/8" rear spud
- 10" rough-in
- Available in White
- MaP: 1000 grams

SmartHeight™ 

Specifications*

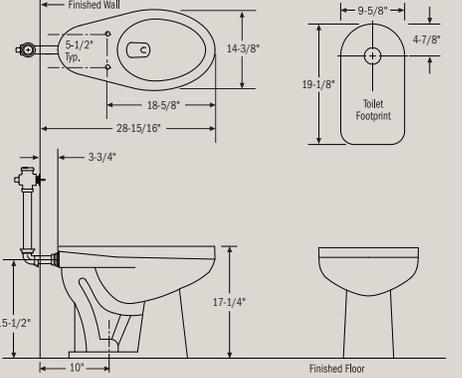



ELONGATED FRONT

HET
HIGH EFFICIENCY TOILET


Adriatic™ 1319BPL

Features

- Floor-mount flushometer toilet
- Bariatric - supports up to 1,000 lbs.
- Built-in bedpan lugs so bedpans stay secure
- Specifically designed for clinical applications
- Siphon-jet flushing action for exceptional flushing performance
- 1.28* or 1.6 Gpf low water consumption (*When using the proper 1.28 flushometer)
- SmartHeight™ chair height bowl for maximum comfort
- 2-1/8" glazed trapway reduces clogging
- 1-1/2" top spud
- Available in White
- MaP: 1000 grams

SmartHeight™ 

Specifications*

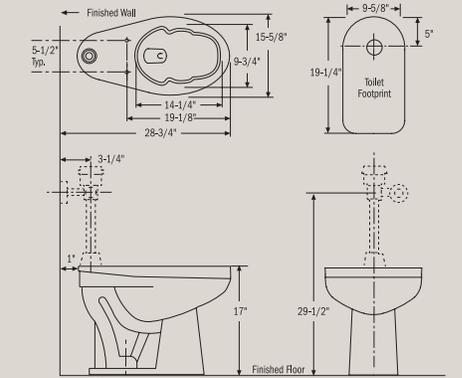

*NOTE: Install this product according to the installation guide. Fixture dimensions are nominal and conform to tolerances in ASME Standard A112.19.2-2008/CSA B45.1-08.


Baltic™ 1311NS



Features

- Floor-mount flushometer toilet
- Specifically designed for industrial and commercial applications
- Siphon-jet flushing action for exceptional flushing performance
- 1.28* or 1.6 Gpf low water consumption (*When using the proper 1.28 flushometer)
- 2" glazed trapway reduces clogging
- 1-1/2" top spud
- Available in White, Biscuit and Bone
- MaP: 1000 grams

Specifications*

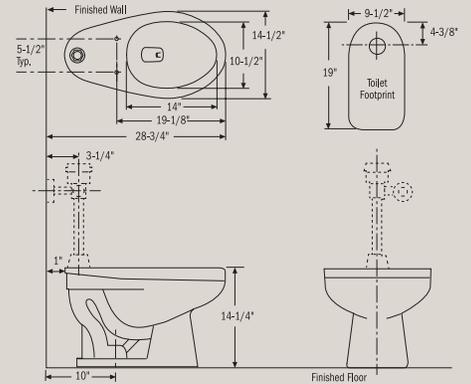


Baltic™ 1311RS



Features

- Floor-mount, rear spud flushometer toilet
- Specifically designed for industrial and commercial applications
- Siphon-jet flushing action for exceptional flushing performance
- 1.28* or 1.6 Gpf low water consumption (*When using the proper 1.28 flushometer)
- 2" glazed trapway reduces clogging
- 1-1/2" rear spud
- 10" rough in
- Available in White
- MaP: 1000 grams

Specifications*

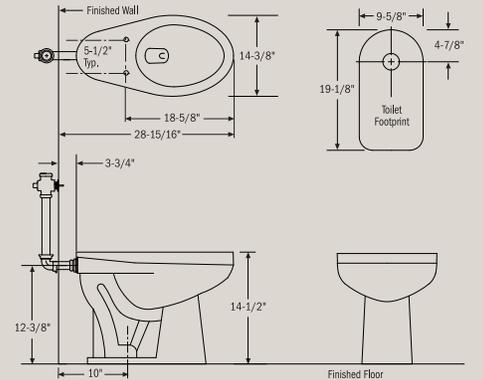


Erie™ 1301



Features

- Wall-mount, rear outlet flushometer toilet
- Specifically designed for industrial, commercial and clinical applications
- 1.28 or 1.6 Gpf low water consumption (*When using the proper 1.28 flushometer)
- Bariatric - supports up to 1,000 lbs.
- Siphon-jet flushing action for exceptional flushing performance
- 1-7/8" glazed trapway reduces clogging
- 1-1/2" top spud
- Available in White
- MaP: 1000 grams

Specifications*

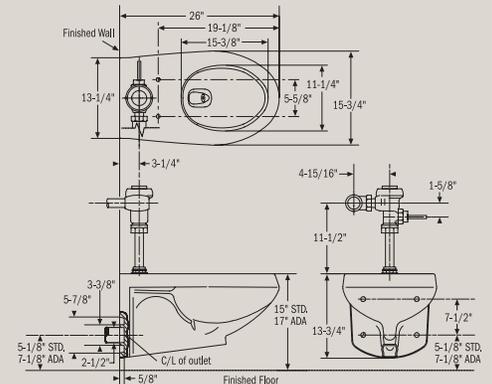


Erie™ 1301RS



Features

- Wall-mount, rear outlet flushometer toilet
- Specifically designed for industrial, commercial and clinical applications
- 1.28 or 1.6 Gpf low water consumption (*When using the proper 1.28 flushometer)
- Bariatric - supports up to 1,000 lbs.
- Siphon-jet flushing action for exceptional flushing performance
- 2" glazed trapway reduces clogging
- 1-1/2" rear spud
- Available in White
- MaP: 1000 grams

Specifications*

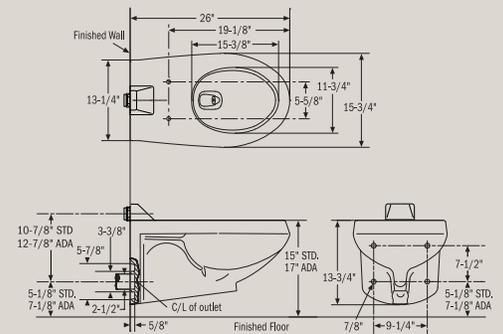

*NOTE: Install this product according to the installation guide. Fixture dimensions are nominal and conform to tolerances in ASME Standard A112.19.2-2008/CSA B45.1-08.

Flushometer Toilets


Erie™ 1301BPL

Specifications*



Features

- Wall-mount, rear outlet flushometer toilet
- Specifically designed for clinical applications
- 1.28 or 1.6 Gpf low water consumption (*When using the proper 1.28 flushometer)
- Bariatric - supports up to 1,000 lbs.
- Built-in bedpan lugs so bedpans stay secure
- Siphon-jet flushing action for exceptional flushing performance
- 1-7/8" glazed trapway reduces clogging
- 1-1/2" top spud
- Available in White
- MaP: 1000 grams

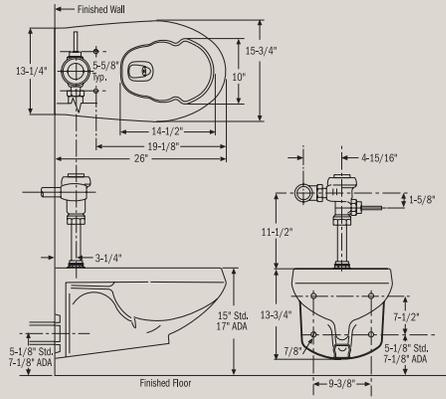


1312

Specifications*



Features

- Floor mount, rear outlet flushometer toilet
- Specifically designed for industrial and commercial applications
- 1.28* or 1.6 Gpf low water consumption (*When using the proper 1.28 flushometer)
- Siphon-jet flushing action for exceptional flushing performance
- 1- 3/4" glazed trapway
- Available in White
- MaP: 1000 grams

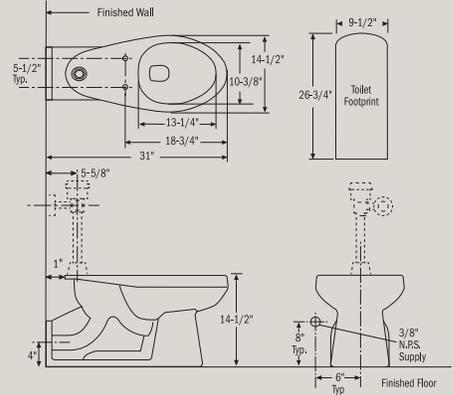


1313 ADA

Specifications*



Features

- Floor mount, rear outlet flushometer toilet
- Specifically designed for industrial and commercial applications
- 1.28* or 1.6 Gpf low water consumption (*When using the proper 1.28 flushometer)
- Siphon-jet flushing action for exceptional flushing performance
- 1- 7/8" glazed trapway
- Available in White
- MaP: 800 grams

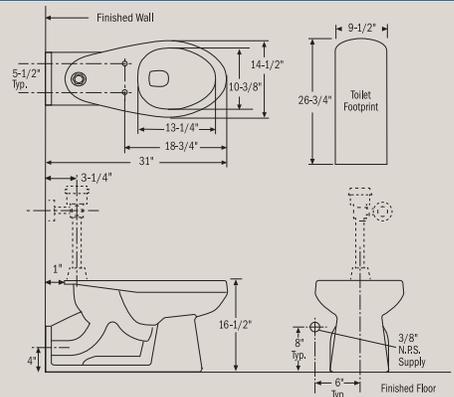

*NOTE: Install this product according to the installation guide. Fixture dimensions are nominal and conform to tolerances in ASME Standard A119.2-2008/CSA B45.1-08.

Urinals

Mansfield® urinals deliver performance and dependability in a variety of handsome styles and performance options. High-efficiency water-conserving urinals as well as ADA compliant models help meet the requirements of today's commercial applications.




Adam™ 401

Specifications*

Features

- Wall mount wash down (1.0 Gpf/3.8 Lpf) urinal
- Easy to clean
- Fitted with 3/4" top spud and 1-1/2" outlet spud
- Mounting bracket and bolts included
- Available in White, Biscuit and Bone

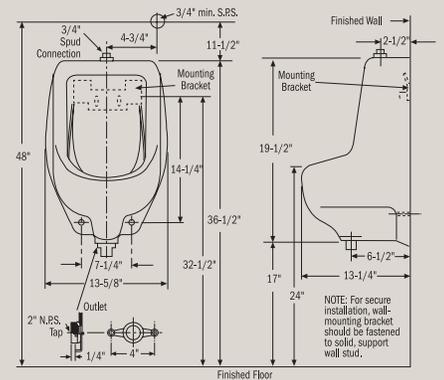

Cascade™ 410HE

Specifications*

Features

- High efficiency (0.5 Gpf), half-stall, wall-mount, washdown urinal with extended sides
- Integral trap
- Easy to clean
- Includes 3/4" top spud, 2" outlet spud and gaskets, two concealed hangers and bolts
- Available in White




HIGH EFFICIENCY URINAL
HEU



ADA Installation

1	44"
2	28-1/4"
3	15-1/4"
4	11-3/4"

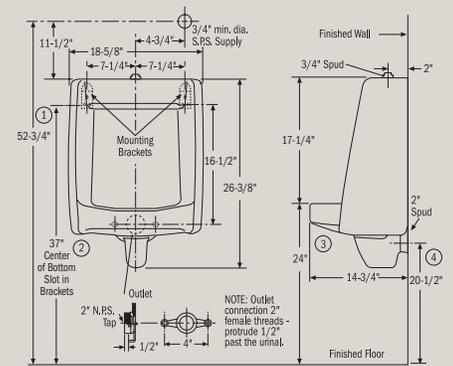

Cascade™ 410HE-RS

Specifications*

Features

- High efficiency (0.5 Gpf), half-stall, wall-mount, washdown urinal with extended sides
- Integral trap
- Rear spud
- Easy to clean
- Includes 3/4" rear spud, 2" outlet spud and gaskets, two concealed hangers and bolts
- Available in White




HIGH EFFICIENCY URINAL
HEU



ADA Installation

1	44"
2	28-1/4"
3	15-1/4"
4	11-3/4"

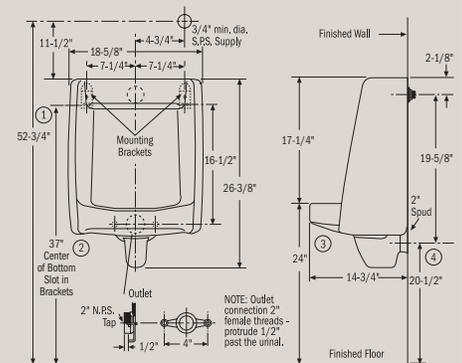

*NOTE: Install this product according to the installation guide. Fixture dimensions are nominal and conform to tolerances in ASME Standard A112.19.2-2008/CSA B45.1-08.

Urinals

Suburban™ 475




Features

- Siphon-jet, wall-mount (1.0 Gpf/3.8 Lpf) urinal
- Integral trap
- Easy to clean
- Includes 3/4" top spud, 2" IPS outlet connector and gaskets, concealed mounting bracket and bolts
- Available in White, Biscuit and Bone

ADA Installation	
1	41-1/8"
2	26-3/4"
3	17"
4	10-3/8"



Specifications*

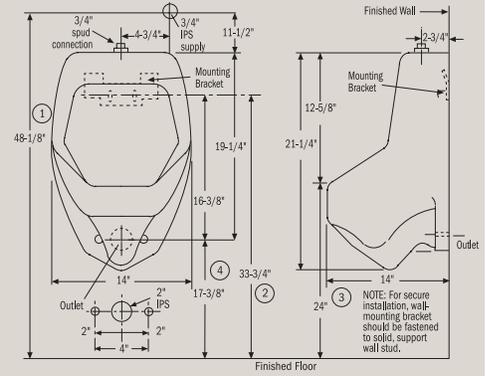


Brevity® 421



Features

- High efficiency 1-pint (.125 Gpf/.4732 Lpf) urinal
- Wall mount, wash-out flush action
- Modern look with clean lines
- Includes flushing rim, integral strainer, two concealed hangers and bolts
- Available in White

Specifications*

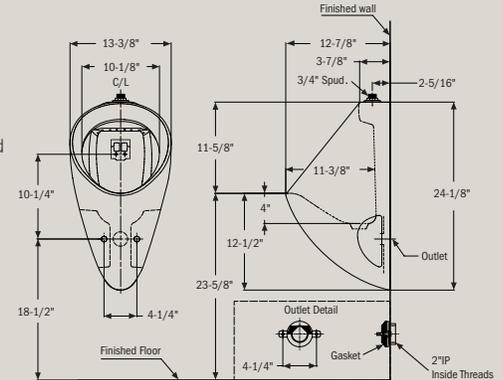

Brevity® 422




Features

- High efficiency 1-pint (.125 Gpf/.4732 Lpf) urinal
- Wall mount, wash-out flush action
- Modern look with clean lines
- Includes flushing rim, integral strainer, two concealed hangers and bolts
- Available in White



Specifications*

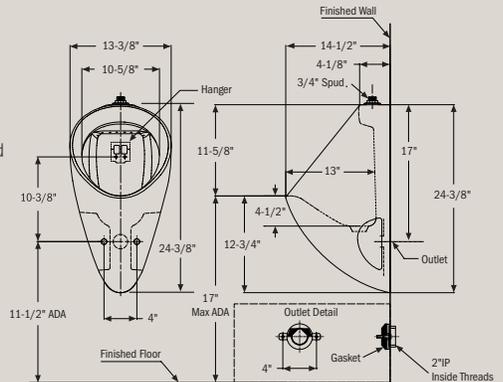

Brevity® 422RS




Features

- High efficiency 1-pint (.125 Gpf/.4732 Lpf) urinal
- Wall mount, wash-out flush action
- 2" rear spud
- Modern look with clean lines
- Includes flushing rim, integral strainer, two concealed hangers and bolts
- Available in White



Specifications*

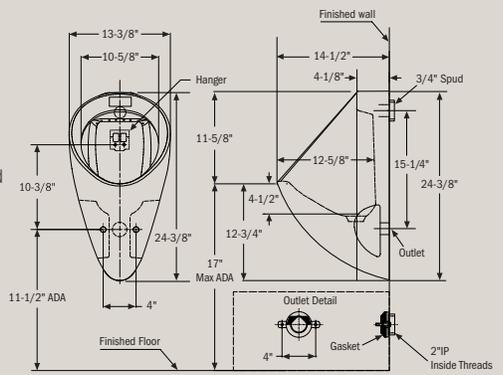

*NOTE: Install this product according to the installation guide. Fixture dimensions are nominal and conform to tolerances in ASME Standard A112.19.2-2008/CSA B45.1-08.

Lavatories & Clinical Sink

Mansfield® offers lavatories to accommodate virtually any commercial application. Whatever your need, you'll find a stylish and durable, vitreous china Mansfield® lavatory for the job.



Grande Isle™ 2018HBNS


Specifications*



Features

- 22" x 18-1/8" wall-mount lavatory
- Full 4" high backsplash
- Drilled for concealed arm carrier
- Concealed front overflow
- Includes hanger
- Available in single hole, 4" and 8" faucet centers
- Available in White, Biscuit and Bone

Also available:
Model 2018HBNS-LO less overflow
4" and 8" faucet centers

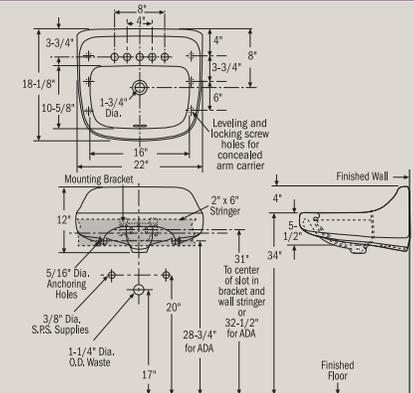

Willow Run™ 1917C


Specifications*



Features

- 19-1/2" x 16-3/4" wall-mount lavatory
- 13-1/2" x 10" basin
- Wide back ledge with twin side soap recesses
- Concealed front overflow
- Includes hanger
- Available in 4" faucet center
- Available in White, Biscuit, and Bone

Also available:
Model 1917C-LO less overflow 4" faucet center
only

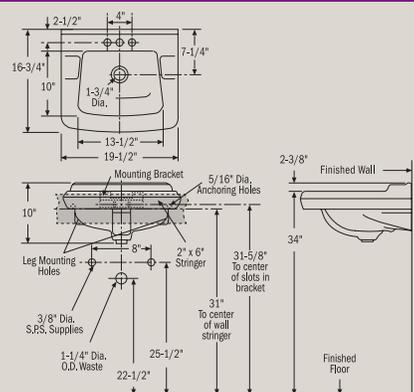


Spruce Cove™ 1613NS

Specifications*



Features

- 16-1/8" x 13-1/4" wall-mount compact lavatory
- 13-1/4" x 8" basin
- Wide back ledge
- Concealed front overflow
- Includes hanger
- Available in 4" faucet center
- Available in White

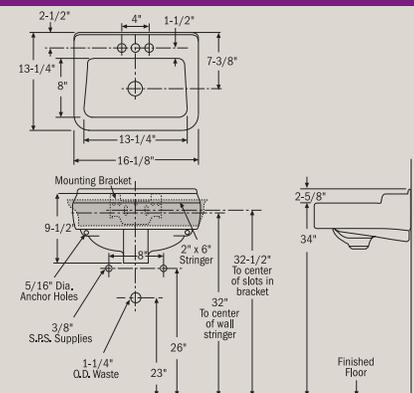

*NOTE: Install this product according to the installation guide. Fixture dimensions are nominal and conform to tolerances in ASME Standard A12.19.2-2008/CSA B45.1-08.

**Must be mounted with the rim or counter surface no higher than 34" above the finished floor and provide a clearance of at least 29" above the finished floor to the bottom of the apron to comply with ADA requirements.

Lavatories & Clinical Sink


Walnut Knoll™ 2008

Specifications*



Features

- 21" x 18-3/4" wall-mount lavatory with ledge
- Wide back ledge with 16" x 10-3/4" basin
- Drilled for concealed arm carrier
- Concealed front overflow
- Includes hanger
- Available in 4" and 8" faucet centers
- Available in White

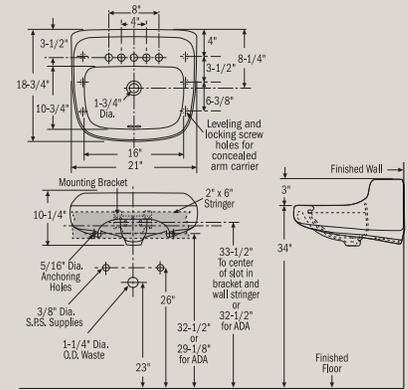

Pamlico Shroud™ 2040 (2038/2039)

Specifications*




Features

- 21-1/4" x 22" wall-mount lavatory with optional shroud pedestal
- Perfect for commercial and institutional applications
- Clean lines for easy cleaning
- Available in single hole, 4" and 8" faucet centers
- Available in White

Also available:

Model 2038-LO less overflow
4" and 8" faucet centers

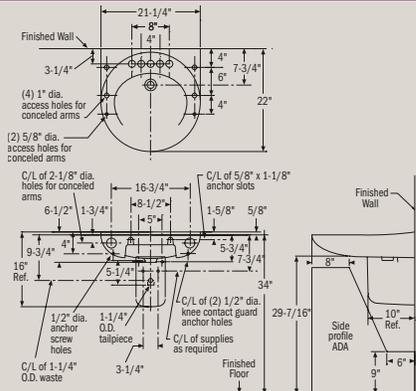

Maumelle® 2028

Specifications*




Features

- 21-1/4" x 22" semi-recessed lavatory
- Perfect for residential and hospitality applications
- Clean lines for easy cleaning
- Concealed front overflow
- Available in single hole, 4" and 8" faucet centers
- Available in White

Also available:

Model 2028-LO less overflow
4" faucet center only

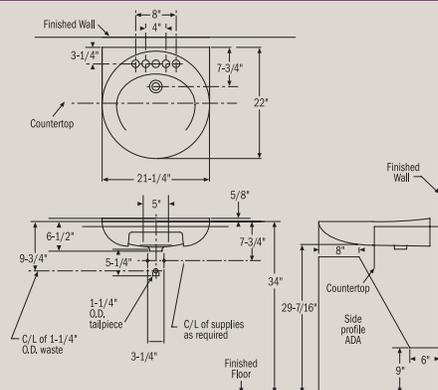


Cape Charles 2018C

Specifications*



Features

- 21" x 18-1/4" wall-mount lavatory with ledge
- 17" x 12-5/8" basin
- Drilled for concealed arm carrier
- Concealed front overflow
- Includes hanger
- Available in 4" and 8" faucet centers
- Available in White, Biscuit, and Bone
- 8" Available in White

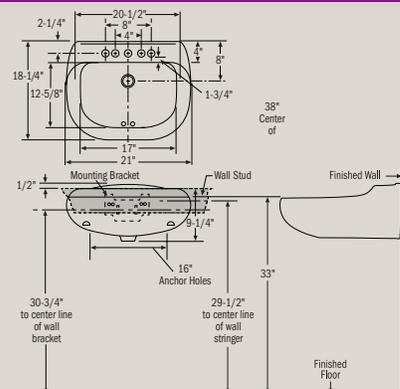

*NOTE: Install this product according to the installation guide. Fixture dimensions are nominal and conform to tolerances in ASME Standard A112.19.2-2008/CSA B45.1-08.

**Must be mounted with the rim or counter surface no higher than 34" above the finished floor and provide a clearance of at least 29" above the finished floor to the bottom of the apron to comply with ADA requirements.

Wheelchair 315


Specifications*



Features

- 20" x 27" wall-mount lavatory
- 13-1/4" x 12-3/4" basin
- Drilled for concealed arm carrier
- Concealed front overflow
- Concave front for wheelchair accessibility
- Available in 4" and 8" faucet centers
- Available in White

Also available:
Model 315-LO less overflow

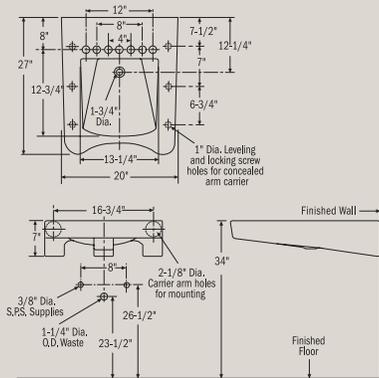


Medajan™ 3072

Specifications*



Features


- 20" x 24-1/2" clinical sink
- Blow out flushing action
- 6.5 Gpf / 24.5 Lpf (using proper flush valve)
- Optional stainless steel rim guard (installed in the front & sides)
- Waste outlet seal can be neoprene or graphite-felt
- Available in White

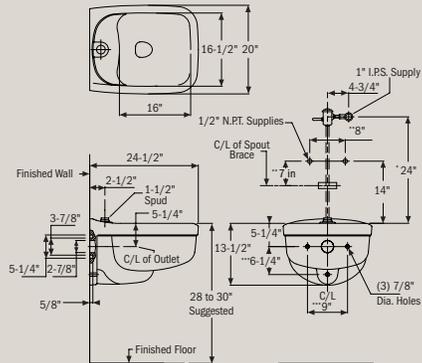

Petite Maple 216NS

Specifications*


- 17-1/8" x 14-1/4" undercounter lavatory

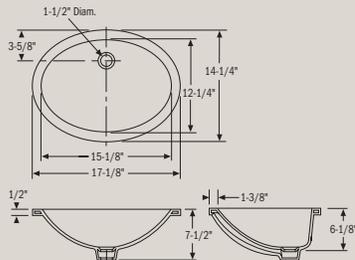

Maple 217

Specifications*


- 19-3/4" x 16" undercounter lavatory

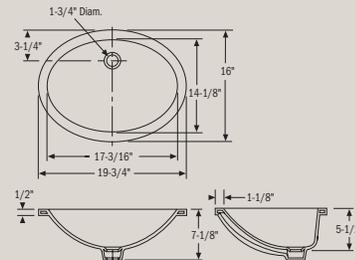

Petite Covington 218NS

Specifications*


- 21-3/8" x 13-1/2" undercounter lavatory

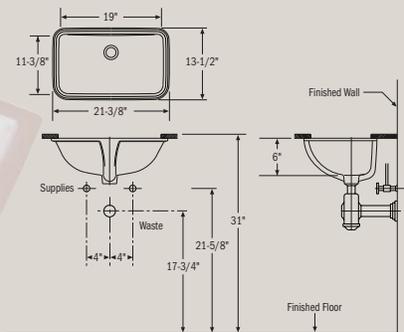

Brentwood™ 234

Specifications*

- 20-5/16" x 14-3/16" undercounter lavatory

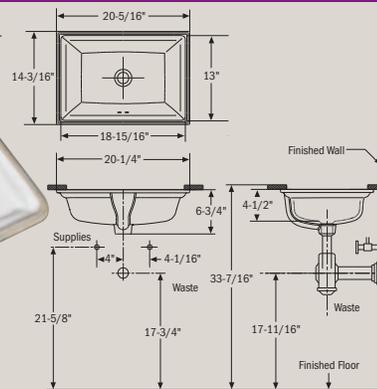

*NOTE: Install this product according to the installation guide. Fixture dimensions are nominal and conform to tolerances in ASME Standard A112.19.2-2008/CSA B45.1-08.

**Must be mounted with the rim or counter surface no higher than 34" above the finished floor and provide a clearance of at least 29" above the finished floor to the bottom of the apron to comply with ADA requirements.

DuraFlo® Flushometer Valves

Mansfield's manual flush valves provide the durability and reliability needed to stand up to high-traffic commercial applications. They offer low water consumption cost savings and feature long-lasting components that allow DuraFlo® valves to set the standard for dependable service.



Toilet Flushometer FM-T2 for 1.28 Gpf toilets



Features

- Diaphragm style flushometer valve
- Filter-protected timing orifice
- High-luster chrome-plated finish
- Long-lasting elastomeric materials

Also available:

Model FM-T6 for 1.6 Gpf toilets

Urinal Flushometer FM-U8 for 1 pint urinals



Features

- Diaphragm style flushometer valve
- Filter-protected timing orifice
- High-luster chrome-plated finish
- Long-lasting elastomeric materials

Also available:

Model FM-U1 for 1.0 Gpf urinals

Model FM-U5 for 0.5 Gpf urinals

*NOTE: Install this product according to the installation guide.

M-1 Commercial Packages

Mansfield helps take the complexity out of the specification process with our Flushometer Toilet Packages (which bundle a flushometer toilet bowl, matching flush valve, matching seat, and wax ring) and Urinal Packages (which bundle a urinal with matching flush valve.)



M-1 Commercial Toilet Packages



Features

- Flushometer toilet bowl, matching flush valve, and matching seat

Model #	Description
CP-1319-16	Adriatic Commercial Package – ADA 1.6 GPF bowl, valve kit & toilet seat
CP-1319-128	Adriatic Commercial Package – ADA 1.28 GPF bowl, valve kit & toilet seat
CP-1311-16	Baltic Commercial Package – 1.6 GPF bowl, valve kit & toilet seat
CP-1311-128	Baltic Commercial Package – 1.28 GPF bowl, valve kit & toilet seat
CP-1312-16	1312 Commercial Package – 1.6 GPF bowl, valve kit & toilet seat
CP-1312-128	1312 Commercial Package – 1.28 GPF bowl, valve kit & toilet seat
CP-1313-16	1313 Commercial Package – ADA 1.6 GPF bowl, valve kit & toilet seat
CP-1313-128	1313 Commercial Package – ADA 1.28 GPF bowl, valve kit & toilet seat
CP-1301-16	Erie Commercial Package – 1.6 GPF bowl, valve kit & toilet seat
CP-1301-128	Erie Commercial Package – 1.28 GPF bowl, valve kit & toilet seat

M-1 Commercial Urinal Packages



Features

- Urinal with matching flush valve

Model #	Description
CP-410-1	Cascade Commercial Package – 1.0 GPF urinal & valve kit
CP-410-HE	Cascade Commercial Package – 0.5 GPF urinal & valve kit
CP-421-125	Brevity Commercial Package – 0.125 GPF urinal & valve kit
CP-422-125	Brevity Commercial Package – ADA 0.125 GPF urinal & valve kit
CP-475-1	Suburban Commercial Package – 1.0 GPF urinal & valve kit
CP-401-1	Adam Commercial Package – 1.0 GPF urinal & valve kit

Pressure-Assist Toilets

Quantum® pressure-assist toilets use up to 40% less water and all offer outstanding “one flush” performance. Whether you choose the ultra efficient 1.0 Gpf QuantumOne™, the dual flush 1.1 Gpf/1.6 Gpf Eco Quantum®, or the 1.6 Gpf Quantum®, you’ll be assured of superior performance over conventional gravity flush toilets.




Pressure-Assist Flushing Performance & Conservation

The power to conserve water yet perform to the demands of commercial applications – these are the high standards achieved by the Mansfield® Pressure Assist Flushing System.

The flushing power delivered by Quantum® and even QuantumOne™ 1.0 Gpf toilets easily exceed all ANSI/ASME toilet tests including the 60’ drainline carry. For water conservation AND commercial-grade reliability, put the power of the Mansfield® Pressure Assist Flushing System to work for you.

Pressure-Assist Flushing Performance

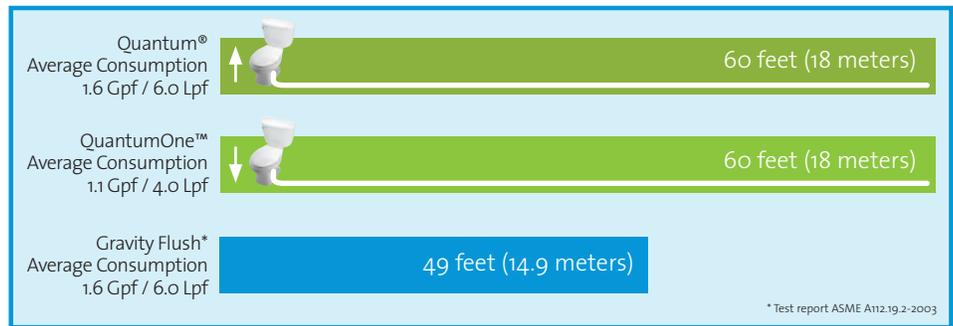



ELONGATED FRONT



HET

QuantumOne™ 144-153


Features

- Elongated front (1.0 Gpf/3.8 Lpf)
- Rear outlet, wall-mount for easy cleaning
- Powerful pressure-assist flushing
- Outstanding “one flush” performance
- Saves 40% more water than conventional flush toilets
- 2-1/8" glazed trapway
- Available in White, Biscuit and Bone
- MaP: 800 grams

Also available:
Model 144-153RH with right hand trip lever
Model 144-154 with push button actuator



Rear Outlet

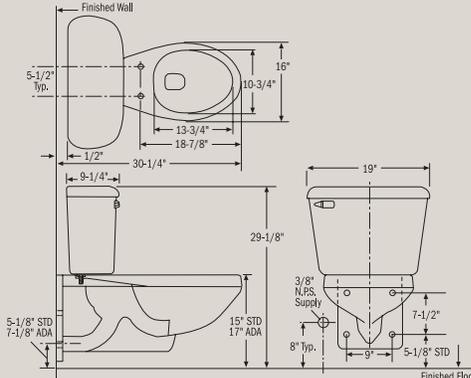



ROUND FRONT



Mansfield

HET


QuantumOne™ 146-153

Features

- Round front (1.0 Gpf/3.8 Lpf)
- Powerful pressure-assist flushing
- Outstanding “one flush” performance
- Saves 40% more water than conventional flush toilets
- 2-1/8" glazed trapway
- 12" rough-in
- Available in White, Biscuit and Bone
- MaP: 1000 grams

Also available:
Model 146-153RH with right hand trip lever
Model 146-154 with push button actuator

12" Rough-In*

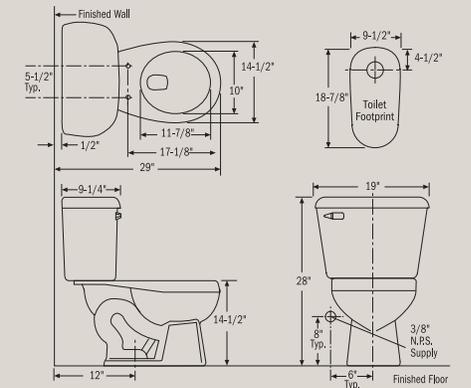

*NOTE: Install this product according to the installation guide. Fixture dimensions are nominal and conform to tolerances in ASME Standard A112.19.2-2008/CSA B45.1-08.

QuantumOne™ 147-153 12" Rough-In*




Features

- Elongated front (1.0 Gpf/3.8 Lpf)
- Powerful pressure-assist flushing
- Outstanding "one flush" performance
- Saves 40% more water than conventional flush toilets
- 2-1/8" glazed trapway
- 12" rough-in
- Available in White, Biscuit and Bone
- MaP: 1000 grams

Also available:
 Model 147-153RH with right hand trip lever
 Model 147-154 with push button actuator





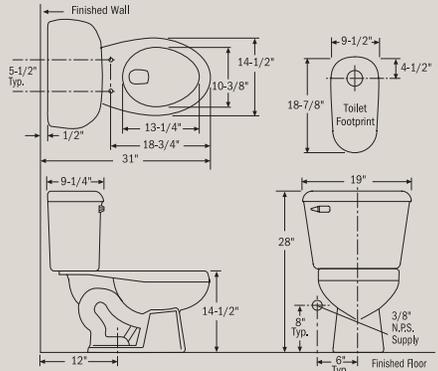

QuantumOne™ 148-153 12" Rough-In*



Features


- Elongated front, SmartHeight™ (1.0 Gpf/3.8 Lpf)
- Powerful pressure-assist flushing
- Outstanding "one flush" performance
- Saves 40% more water than conventional flush toilets
- 2-1/8" glazed trapway
- 12" rough-in
- Available in White, Biscuit and Bone
- MaP: 1000 grams

Also available:
 Model 148-153RH with right hand trip lever
 Model 148-154 with push button actuator







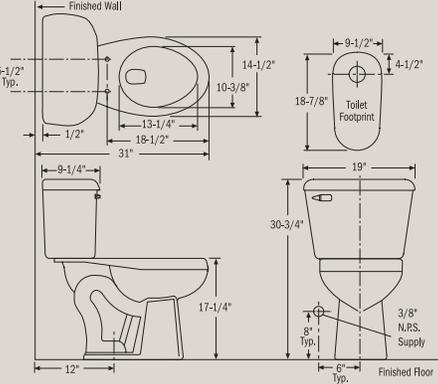

QuantumOne™ 149-153 Rear Outlet




Features

- Elongated front, rear outlet, floor mount (1.0 Gpf/3.8 Lpf)
- Powerful pressure-assist flushing
- Outstanding "one flush" performance
- Saves 40% more water than conventional flush toilets
- 1-7/8" glazed trapway
- Available in White, Biscuit and Bone
- MaP: 1000 grams

Also available:
 Model 149-153RH with right hand trip lever
 Model 149-154 with push button actuator





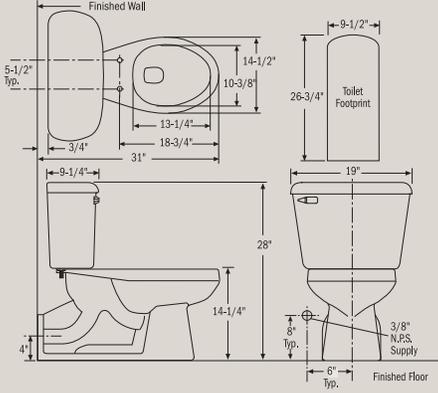

QuantumOne™ 151-153 Rear Outlet



Features


- Elongated front, rear outlet, floor mount (1.0 Gpf/3.8 Lpf)
- Powerful pressure-assist flushing
- Outstanding "one flush" performance
- Saves 40% more water than conventional flush toilets
- 1-7/8" glazed trapway
- Available in White, Biscuit and Bone
- MaP: 600 grams

Also available:
 Model 151-153RH with right hand trip lever
 Model 151-154 with push button actuator







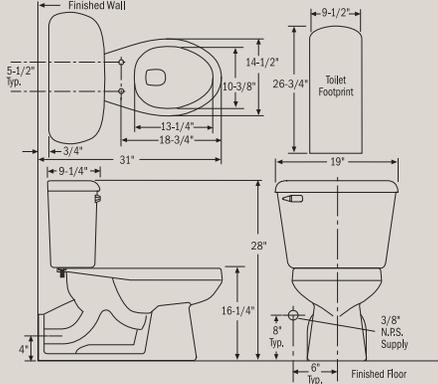

*NOTE: Install this product according to the installation guide. Fixture dimensions are nominal and conform to tolerances in ASME Standard A112.19.2-2008/CSA B45.1-08.

EcoQuantum® 144-119


Rear Outlet

Features

- Elongated front (1.1 Gpf/4.0 Lpf and 1.6 Gpf/6.0 Lpf)
- Rear outlet, wall-mount for easy cleaning
- EcoFlush™ pressure-assist with dual flush technology
- Outstanding “one flush” performance
- 2-1/8" glazed trapway
- Available in White, Biscuit and Bone
- MaP: 1000 grams

Also available:

- Model 144-119RH with right hand trip lever
- Model 144-119CL with cover lock

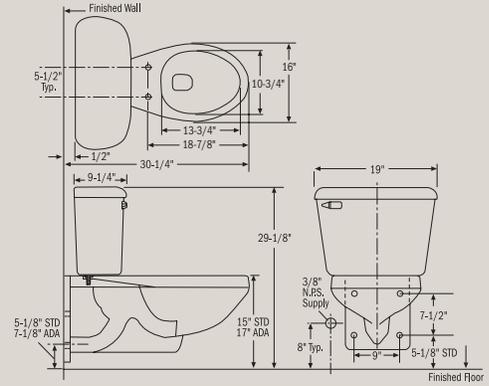

EcoQuantum® 146-119


12" Rough-In*

Features

- Round front (1.1 Gpf/4.0 Lpf and 1.6 Gpf/6.0 Lpf)
- EcoFlush™ pressure-assist with dual flush technology
- Outstanding “one flush” performance
- 2-1/8" glazed trapway
- 12" rough-in
- Available in White, Biscuit and Bone
- MaP: 1000 grams

Also available:

- Model 146-119RH with right hand trip lever
- Model 146-119CL with cover lock

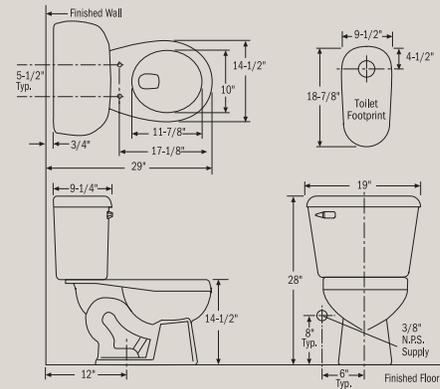

EcoQuantum® 147-119


12" Rough-In*

Features

- Elongated front (1.1 Gpf/4.0 Lpf and 1.6 Gpf/6.0 Lpf)
- EcoFlush™ pressure-assist with dual flush technology
- Outstanding “one flush” performance
- 2-1/8" glazed trapway
- 12" rough-in
- Available in White, Biscuit and Bone
- MaP: 1000 grams

Also available:

- Model 147-119RH with right hand trip lever
- Model 147-119CL with cover lock

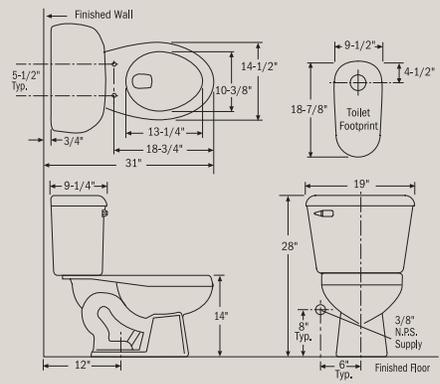

EcoQuantum® 148-119


12" Rough-In*

Features

- Elongated front, SmartHeight™ (1.1 Gpf/4.0 Lpf and 1.6 Gpf/6.0 Lpf)
- EcoFlush™ pressure-assist with dual flush technology
- Outstanding “one flush” performance
- 2-1/8" glazed trapway
- 12" rough-in
- Available in White, Biscuit and Bone
- MaP: 1000 grams

Also available:

- Model 148-119RH with right hand trip lever
- Model 148-119CL with cover lock

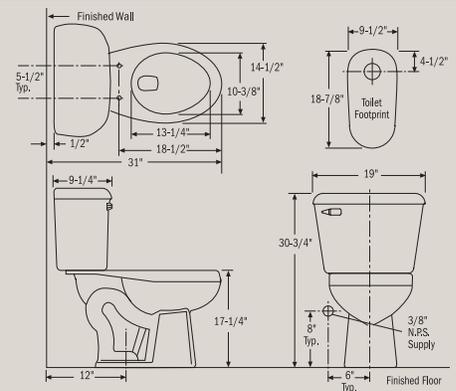

*NOTE: Install this product according to the installation guide. Fixture dimensions are nominal and conform to tolerances in ASME Standard A12.19.2-2008/CSA B45.1-08.

EcoQuantum® 149-119

Rear Outlet



ELONGATED FRONT




Features

- Elongated front (1.1 Gpf/4.0 Lpf and 1.6 Gpf/ 6.0 Lpf)
- Rear outlet, floor mount
- EcoFlush™ pressure-assist with dual flush technology
- Outstanding “one flush” performance
- 1-7/8" glazed trapway
- Available in White, Biscuit and Bone
- MaP: 500 grams

Also available:

Model 149-119RH with right hand trip lever
Model 149-119CL with cover lock

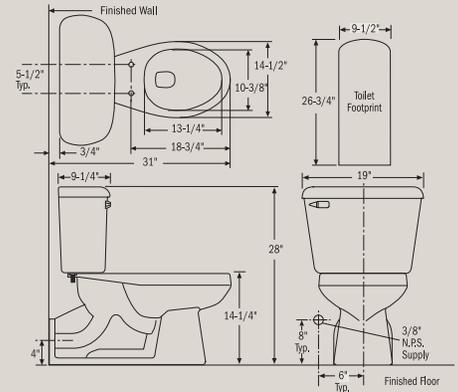

EcoQuantum® 151-119

Rear Outlet



ELONGATED FRONT




Features

- Elongated front, SmartHeight™ (1.1 Gpf/4.0 Lpf and 1.6 Gpf/6.0 Lpf)
- Rear outlet, floor mount
- EcoFlush™ pressure-assist with dual flush technology
- Outstanding “one flush” performance
- 1-7/8" glazed trapway
- Available in White, Biscuit and Bone
- MaP: 1000 grams

Also available:

Model 151-119RH with right hand trip lever
Model 151-119CL with cover lock

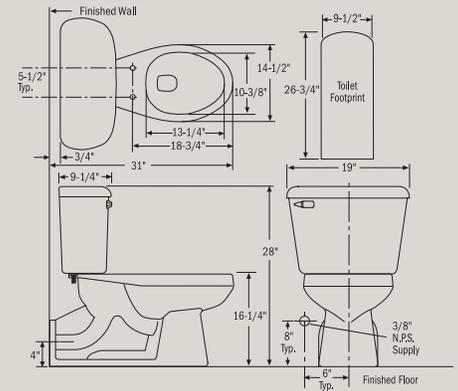

Quantum® 144-123

Rear Outlet




ELONGATED FRONT

Features

- Elongated front (1.6 Gpf/6.0 Lpf)
- Rear outlet, wall-mount for easy cleaning
- High performance pressure-assist flushing system
- 2-1/8" glazed trapway
- Available in White, Biscuit and Bone
- MaP: 1000 grams

Also available:

Model 144-123RH with right hand trip lever
Model 144-122 with push button actuator

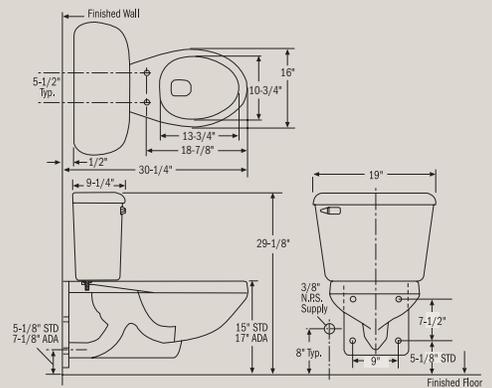

Quantum® 146-123

12" Rough-In*



ROUND FRONT




Features

- Round front (1.6 Gpf/6.0 Lpf)
- High performance pressure-assist flushing system
- 2-1/8" glazed trapway
- 12" rough-in
- Available in White, Biscuit and Bone

Also available:

Model 146-123RH with right hand trip lever
Model 146-122 with push button actuator

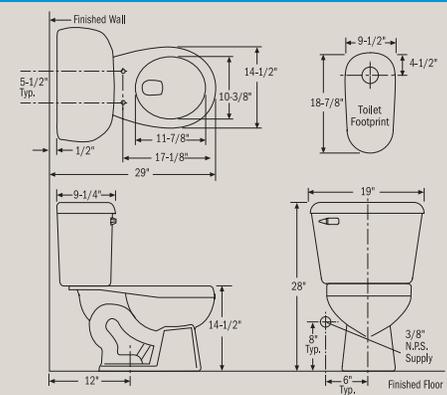

*NOTE: Install this product according to the installation guide. Fixture dimensions are nominal and conform to tolerances in ASME Standard A112.19.2-2008/CSA B45.1-08.

Pressure Assist Toilets

Quantum® 147-123



ELONGATED FRONT




mansfield.

12" Rough-In*

Features

- Elongated front (1.6 Gpf/6.0 Lpf)
- High performance pressure-assist flushing system
- 2-1/8" glazed trapway
- 12" rough-in
- Available in White, Biscuit and Bone

Also available:
 Model 147-10-123 with 10" rough-in
 (contact Customer Service for detailed specs)
 Model 147-123RH with right hand trip lever
 Model 147-122 with push button actuator

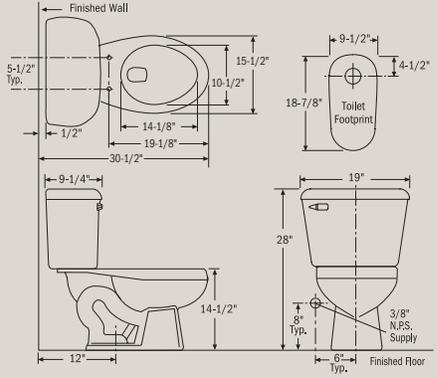

Quantum® 148-123



ELONGATED FRONT




mansfield.

12" Rough-In*

Features

- Elongated front, SmartHeight™ (1.6 Gpf/6.0 Lpf)
- High performance pressure-assist flushing system
- 2-1/8" glazed trapway
- 12" rough-in
- Available in White, Biscuit and Bone

Also available:
 Model 148-10-123 with 10" rough-in
 (contact Customer Service for detailed specs)
 Model 148-123RH with right hand trip lever
 Model 148-122 with push button actuator

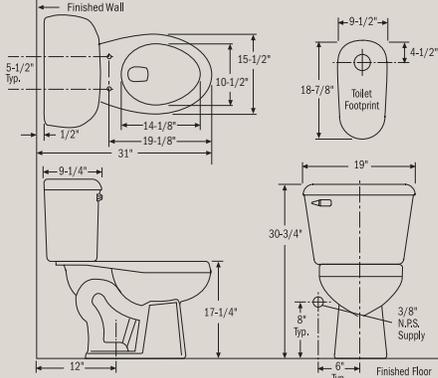

SmartHeight™  

Quantum® 149-123



ELONGATED FRONT




mansfield.

Rear Outlet

Features

- Elongated front, rear outlet, floor mount (1.6 Gpf/6.0 Lpf)
- High performance pressure-assist flushing system
- 1-7/8" glazed trapway
- Available in White, Biscuit and Bone

Also available:
 Model 149-123RH with right hand trip lever
 Model 149-122 with push button actuator

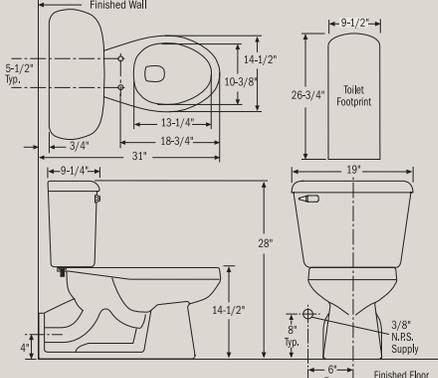

Quantum® 151-123



ELONGATED FRONT




mansfield.

Rear Outlet

Features

- Elongated front, rear outlet, floor mount (1.6 Gpf/6.0 Lpf)
- High performance pressure-assist flushing system
- 1-7/8" glazed trapway
- Available in White, Biscuit and Bone
- MaP: 1000 grams

Also available:
 Model 151-123RH with right hand trip lever
 Model 151-122 with push button actuator

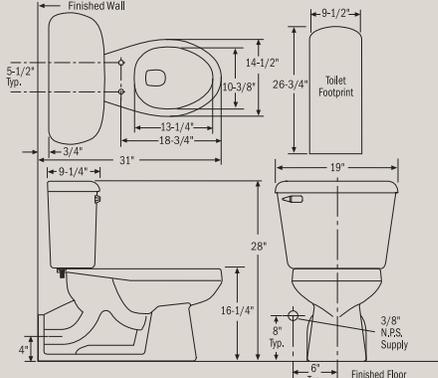

SmartHeight™  

*NOTE: Install this product according to the installation guide. Fixture dimensions are nominal and conform to tolerances in ASME Standard A12.19.2-2008/CSA B45.1-08.

Mansfield		Gerber	American Standard	Kohler	Zurn
Model #	Description	Model #	Model #	Model #	Model #
TOILET COMBINATIONS					
Quantum® Pressure Assist 1.6 gpf					
144-123	1.6 gpf / 6.0 lpf, Elongated, ADA Rear Outlet Wall Mount	–	2093.100	–	–
146-123	1.6 gpf / 6.0 lpf, Round	21-302	2366.100.020	–	–
147-10-123	1.6 gpf / 6.0 lpf, Elongated, 10" Rough-in	21-311	–	–	–
147-123	1.6 gpf / 6.0 lpf, Elongated	21-312	2462.016	K-3505	Z5771
148-10-123	1.6 gpf / 6.0 lpf, Elongated, ADA 10" Rough-in	21-317	–	–	–
148-123	1.6 gpf / 6.0 lpf, Elongated, ADA	21-318	2377.100.020	–	Z5560
149-123	1.6 gpf / 6.0 lpf, Elongated, Rear Outlet	21-310	2878.016	K-3554	–
151-123	1.6 gpf / 6.0 lpf, Elongated, ADA Rear Outlet	21-325	3703.016	–	–
EcoQuantum® Dual-Flush 1.1 / 1.6 gpf					
144-119	Dual Flush Elongated, ADA Rear Outlet Wall Mount	–	–	–	–
146-119	Dual Flush Round	DF-21-302	–	–	–
147-119	Dual Flush Elongated	DF-21-312	–	–	Z5772
148-119	Dual Flush Elongated, ADA	DF-21-318	–	–	Z5562
149-119	Dual Flush Elongated, Rear Outlet	DF-21-310	–	–	–
151-119	Dual Flush Elongated, ADA Rear Outlet	DF-21-325	–	–	–
QuantumOne™ Pressure Assist 1.0 gpf					
144-153	1.0 gpf / 3.8 lpf, Elongated, Rear Outlet Wall Mount	–	–	–	–
146-153	1.0 gpf / 3.8 lpf, Round	EF-21-302	2467.100	–	–
147-153	1.0 gpf / 3.8 lpf, Elongated	EF-21-312	–	K-3531-0	Z5661
148-153	1.0 gpf / 3.8 lpf, Elongated, ADA	EF-21-318	–	K-3519-0	Z5570
149-153	1.0 gpf / 3.8 lpf, Elongated, Rear Outlet	EF-21-310	2878.100	K-3652	Z5586
151-153	1.0 gpf / 3.8 lpf, Elongated, ADA Rear Outlet	EF-21-325	2878.100	K-3578	–
URINALS					
401	Adam™ Wall Mount, Wash-Down	27-740	6581.015	K-5024-T-0	Z5720
410HE	Cascade™ Half-Stall, Wash-Down	HE27-730	6042.005	–	Z5755
410HE-RS	Cascade™ Half-Stall, Wash-Down, Rear Spud	HE27-735	6515.001	K-4904-ER-0	Z5760
421	Brevity	–	–	–	Z5708
422	Brevity ADA	–	–	–	–
422RS	Brevity ADA Rear Spud	–	6043.005	–	–
475	Suburban™ Integral Trap, Siphon Jet	Top Spud Rear Spud 27-750 27-755	6541.132 –	K-5016-ET-0 K-5016-ER-0	Z5730 Z5740
LAVATORIES					
216	Petite Maple Under Counter	12-770	0495.221.020	K-2209-0	–
217	Maple Under Counter	12-780	0496.221.020	K-2210-0	–
218	Petite Covington Under Counter	12-760	0618.000.020	K-2339-0	–
234	Brentwood Under Counter	12-765	0614.000.020	–	–
315-4	Wheelchair Wall Mount	12-464	9141.011.020	K-12636-0	–
315-8		12-468	–	–	–
1613NS	Spruce Cove Wall Mount	12-354	–	–	–
1917C	Willow Run Wall Mount	12-314	321.026	K-1728-0	Z5314
2008-4	Walnut Knoll Wall Mount	12-384	124.024	K-1729-0	Z5314
2008-8		–	–	–	Z5318
2018HBNS-1	Grande Isle Wall Mount	–	0356.421	–	–
2018HBNS-4		12-654	0355.012	K-2005-0	Z5364
2018HBNS-8		12-658	0356.015.020	K-2006-0	Z5368
2028-1	Maumelle	–	–	–	Z5344
2028-4		–	403.004	–	–
2028-4LO		–	403.008	–	–
2028-8		–	403.008	–	Z5354
2038-1	Pamlico Wall Mount (2040 with optional shroud)	–	955.001	–	Z5341-PED
2038-4		12-474	954.004	–	Z5344-PED
2038-8		12-478	958.008	–	Z5348
2038-LO		–	–	–	–
2039	Shroud	29-832	59.020	–	–
SPUD BOWLS					
1301 & 1301BPL	Erie Flush Valve Toilet with or without Bedpan Lugs	25-033	2257.001	K-4330-L-0	Z5610 / Z5611
1301RS	Erie Flush Valve Toilet with Rear Spud	25-038	–	–	Z5620
1311NS	Baltic Flush Valve Toilet	25-833	3043.001	K-4406	Z5650
1312	Floor Mount Back Outlet	25-733	3697.001	K-4396	Z5630
1313	Floor Mount Back Outlet ADA	25-878	2529.116	K-4352	Z5640
1319 & 1319RS	Adriatic Flush Valve Toilet with Top or Rear Spud	25-730	3461.001	K-4368-0	Z5660

More Resources for Engineers and Architects!

Looking to learn more about Mansfield? Check us out online at mansfieldplumbing.com, the tools you need are there. Download catalogs, review specifications, compare models and more. Be sure to watch our impressive flush demos to see the powerful performance of Mansfield toilets in action.

Plus, when you choose Mansfield, you can download high quality CAD drawings, BIM objects, Revit files and related documents for your next project by visiting mansfieldplumbing.com or caddetails.com and using keyword Mansfield.



Mansfield Plumbing Products LLC
Customer Service 877.850.3060 / Fax 419.938.6234
website: www.mansfieldplumbing.com
custserv@mansfieldplumbing.com

