Models 6028E/6528E PRO-FIT® 4268 OV ED

Oval Whirlpool or Bathtub



Features _____

- 68" x 42" x 20" Oval whirlpool or bathtub
- Six powerful Ultra-Swirl jets
- Dual air knobs for total jet control
- Limited One-Year Warranty
- Available in Standard Colors: white, almond, biscuit and bone



Options -

Lift and Turn Drain

Model #	Description	
PF1320	Polished Chrome	
PF1321	Everbrass (PVD)	
PF1322	Brushed Nickel	
PF1323	Oil Rubbed Bronze	

Whirlpool Options _____

Metal Trim

Model #	Model # Description		Model #	Description	
PF1335	Polished Chrome				
PF1336	Everbrass (PVD)	999	CVA/D4 F4	In the National Lorence	American and the second and the seco
PF1337	Brushed Nickel	6 6	SWP151	In-line Water Heater	, mil 4
PF1338	Oil Rubbed Bronze				






Specifications

Model #	Description	Codes/Standards	
6028E	68" x 42" x 20" Oval end drain whirlpool	UPC USPC W	
6528E	68" x 42" x 20" Oval end drain bathtub	® Intertek	

Specification	Description	Specification	Description
Material	Acrylic, fiberglass reinforced	Number of Jets	6
Construction	Self-contained, pre-plumbed whirlpool bath, mounted on a pre-leveled base	Water Capacity	59 gal. (min.) / 74 gal. (max.)
Pump Motor	120V, 60HZ, 5.8 Amp, Single Speed, Single Phase–Pre-mounted	Floor Loading Weight	47 lbs. / sq. ft. (229 kg/m ²⁾
		Shipping Weight	whirlpool - 158 lbs.
Electrical Requirements	120V, 15 Amp, GFCI protected circuits		bathtub - 138 lbs.
On/Off Control	Air Switch	Warranty	Limited One Year

Technical Information

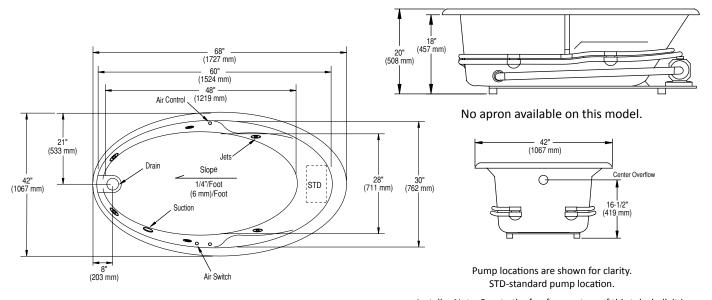

Installer Note: Due to the freeform nature of this tub shell, it is recommended that the tub be on the jobsite before making the final cut-out for drop-in installation.

Notes: Measurements may vary 1/4" (+/-)

Install this product according to the installation guide.

These dimensions are nominal and subject to change without notice.

When tested for compliance to the requirements of ASME A112.19.7M for "Whirlpool Bath Appliances" and ANSI Z124.1.2M "American National Standard for Plastic Bathtub and Shower Units", the tested units are found to comply and are acceptable for listing under IAPMO R & T.

Certified for permanent electrical connection only.

