



FILTER FOR HOT WATER AND KITCHEN FILTER FAUCETS


U.1408

FEATURES

- Complete with housing, wall mount bracket, connections and filter
- Does not come with faucet or water heater.
- Connections:
 - 3/8" male OUTLET
 - 9/16" COMP Female INLET
- Installed under deck
- We recommend the use of a professional plumber for installation
- Cartridge replacement U.PRF1
- Replace filter every 6 months or 1000 gallons of usage.
- Temp Range: Min 34°F (1°C); Max (158°F (70°C))
- Recommended working Pressure:
 - Min 15 PSI (1bar)
 - Max 43.5 PSI (3bar)
- FILTER HOUSING IS TO BE CHANGED EVERY 3 YEARS. FAILURE TO COMPLY WILL VOID ALL WARRANTY OFFERED BY YOUR DISTRIBUTOR OR THE HOUSE OF ROHL.

WARRANTY

All products supplied by ROHL carry warranties against manufacturing defects. Our products carry a Limited Lifetime Warranty. For full ROHL LLC WARRANTY please contact ROHL or visit houseofrohl.com

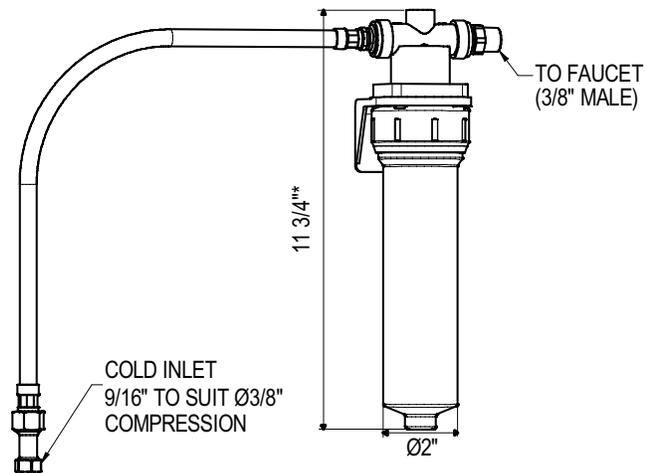

* PLEASE ALLOW 12 1/2" (MINIMUM) TO ALLOW FOR FILTER REPLACEMENT