

For Residential and Commercial Applications


Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

PLS1/PLS2/PLS3-**DL Stainless Steel Flexible Braided Toilet Water Connector - Compression Inlet x Ballcock Outlet

Use: For use only in potable water distribution systems in accessible locations only.


Part Listing:

- PLS1-9DL F 3/8" compression x 7/8" ballcock x 9" length, flag label
- PLS1-12DL F 3/8" compression x 7/8" ballcock x 12" length, flag label
- PLS1-12DLM F 3/8" compression x 7/8" ballcock x 12" length, metal nut, flag label
- PLS1-16DL F 3/8" compression x 7/8" ballcock x 16" length, flag label
- PLS1-20DL F 3/8" compression x 7/8" ballcock x 20" length, flag label
- PLS2-12DL F 7/16" compression x 7/8" ballcock x 12" length, flag label
- PLS3-12DL F 1/2" compression x 7/8" ballcock x 12" length, flag label
- PLS3-20DL F 1/2" compression x 7/8" ballcock x 20" length, flag label

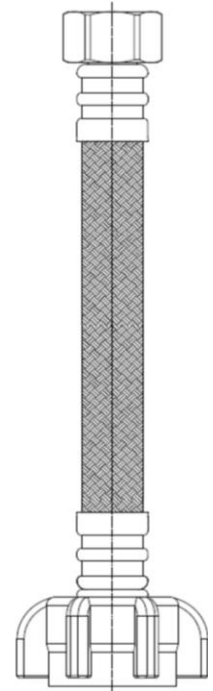

Operating Specifications		
Temperature	Pressure	Tubing Diameter
40°- 160° F, Intermittent to 180° F	125 PSI maximum	0.300" ID (0.510" OD)

CONNECTOR MATERIAL SPECIFICATIONS	
Inner Hose	Reinforced PVC
Braiding	Stainless steel wire
Barb	Brass
Ferrule	Stainless steel
Nut	Plastic
Washer	Rubber
Compression Nut	Brass
Compression Ring	Brass

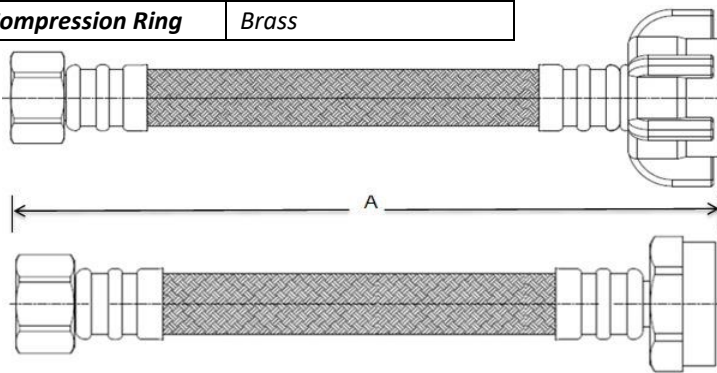

PART DIMENSIONS (Inches)	
Model	DIM. A
PLS1-9	9.0/10.0
PLS1-12	12.0/13.0
PLS1-16	16.0/17.0
PLS1-20	20.0/21.0
PLS2-12	12.0/13.0
PLS3-12	12.0/13.0
PLS3-20	20.0/21.0

Listings & Certifications:

- IAPMO listed to ASME A112.18.6 / CSA B125.6
- IAPMO listed to NSF 372 for Low-Lead Compliance
- IAPMO listed to NSF 61/9



This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

