







THE WORLD'S ONLY ULTRA-HIGH-EFFICIENCY TOILETS



BOWL - N7716 | TANK - N7714 | 12" Rough-In

FEATURES

- Quiet, powerful flush delivered with a patented Stealth flush chamber and air transfer system
- Reliable standard Fluidmaster fill valve
- One flush thoroughly evacuates the bowl every time, eliminating double flushing
- Smooth, low friction ceramic surface helps achieve a clear bowl every time
- Two-piece toilet
- Stylish, inconspicuous and durable flush button
- EZ Height design makes it easier to sit and stand
- No flapper to cause leakage

SPECIFICATIONS

N7716 Bowl and N7714 Tank

Technology Stealth

Flush Rate 0.8 GPF

MaP Performance Score 800g - MaP Premium

Efficiency Rating UHET

ASME Certification ✓ A112.19.2

CSA Certification ☑ B45.1

WaterSense Labeled ✓

Materials Vitreous China

Finish Color White

NOTE: EZ Height is only ADA Compliant with appropriate seat configuration.

MEASUREMENTS


Bowl Dimensions: 14"W x 16"H x 26.5"D

Footprint: 20.5"L x 10.25"W

Water Spot: 8" x 6"

Assembled Dimensions: 18.75" W x 30" H x 27" D

Rough-In: 12"

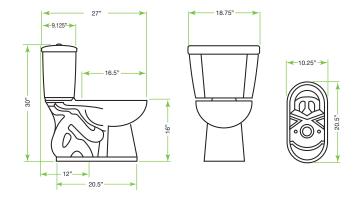





*LIMITED LIFETIME WARRANTY on vitreous china products. Toilet tank trim: fill valve and flush valve assembly and plumbing fittings are warrantied for a period of ten years to the purchaser from the date of purchase. Call Niagara Conservation for complete warranty details.

STEALTH

THE ORIGINAL 0.8 GPF SINGLE FLUSH ROUND BOWL

RETAIL PACKAGING 77001RWHAI1 All-In-One **UPC Code** 732291000420 High-Quality, White Packaging Type Corrugate With Litho Label 16.5" W **Dimensions** 28.7" H 31.5" D Weight (Pkg.) 101 lbs

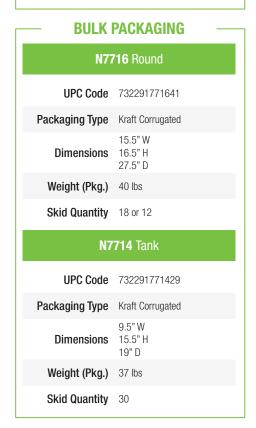

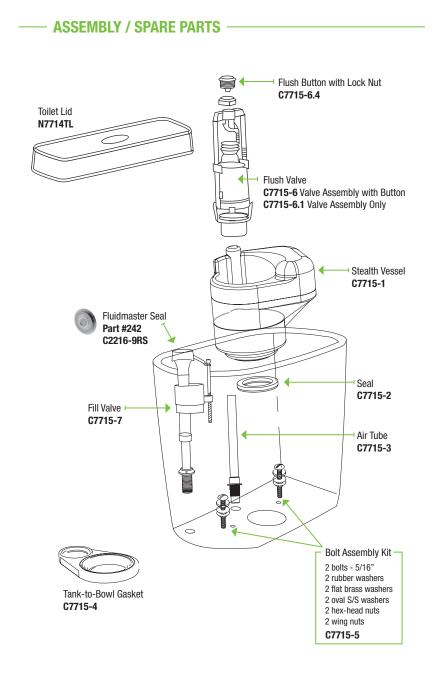

INSTALLATION NOTES

Install this product according to the installation guide. For back-to-back toilet installations: Use only a 45° double wye fitting. Will comply with the Americans with Disabilities Act (ADA) when installed per the requirements of the 2010 ADA Standards of Accessible Design, Section 604 Water Closets, of the Act. The Model Plumbing Codes require the installation of elongated open-front toilet seats in public bathrooms. Will comply with CSA B651 when installed per Clause 4.3.6 of the standard. Will comply with OBC Barrier Free requirements when installed per Clause 3.8.3.8 and 3.8.3.9.