

WOVEN HANGER STRAP

» 554 SERIES

ApeTape™

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

SPECIFICATION

Sioux Chief ApeTape woven hanger strap shall be used where necessary to support DWV pipe. Woven hanger strap shall be non-corrosive and impact resistant and marked with manufacturer's name. Product shall be tested and certified to IAPMO product standard PS-9501. Woven hanger strap is to be installed according to applicable UPC or IPC sections for supporting DWV pipe.

MATERIALS

Jacquard: Woven polypropylene/polyester

INSTALLATION

Cut woven hanger strap to desired length. Fastening hardware (nail or screw) must be installed no less than 1" from cut end to avoid pull out, prior to securing to floor joist. Woven hanger strap may be looped or double wrapped around DWV pipe. Woven hanger strap may be installed on same side or opposite sides of floor joist. If finished look is desired, installer may fold the cut end over prior to installing fastener no less than 1" from cut end of strap.



554-25W

WORKING LOADS

Safe working load*: 125 lbs. at 140°F

Tensile strength: 350 lbs.


*Safe working load = 1/2 failure

CERTIFICATION

UPC IAPMO – File #3450

DIMENSIONS

- A:** Width 0.625"
- B:** Length 25' or 100'
- C:** Thickness 0.060"

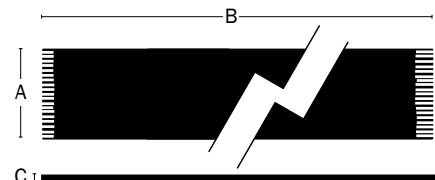

Choose Item Number

554-AW

e.g. **554-100W:** 100' long ApeTape woven polypropylene hanger strap.

LENGTH A

25 = 25' length

100 = 100' length