


PipeTitan™ Universal Bracketing System



- Patent # 5,303,887
- Non-metallic—no electrolysis worries
- Helps isolate pipe and reduce noise
- Compatible with copper, PEX and CPVC



Bracket



Clamp



Strap



Band

THIS BAG CONTAINS:	KIT #	FLAME RETARDANT*	KIT CONTENTS				UPC BAR CODE
			BRACKET	STRAP	CLAMP	BAND	
	570-10		1	2	1	0	
	570-20		1	2	1	1 (5")	
	570-22		1	2	1	1 (5") snap lock	
	570-24		1	2	1	1 (7") snap lock	
	572-20	✓	1	2	1	1 (5")	
	572-22	✓	1	2	1	1 (5") snap lock	
	572-24	✓	1	2	1	1 (7") snap lock	

*Red flame retardant models comply with UL94-V0.

Supply Drainage Support

www.siouxchief.com

TAKE THE FIELD.




Specifications

Standard Green Bracket (570 series)	ABS, U.V. stabilized
Standard Clamp & Strap	Natural high-density polyethylene
Flame Retardant Red Bracket, Clamp & Strap (572 series)	Flame retardant ABS, UL-94 V0
Screws	Zinc coated steel, 5/16" hex/Phillips head, 2" (strap) and 4" (clamp)
Stainless Steel Bands	300 series stainless steel: ½" wide × .025, 5" band = 4" max diameter, 7" band = 6" max diameter Screw: 410 series stainless, slotted/hex head

Safe Working Load

½ failure load at 72°F

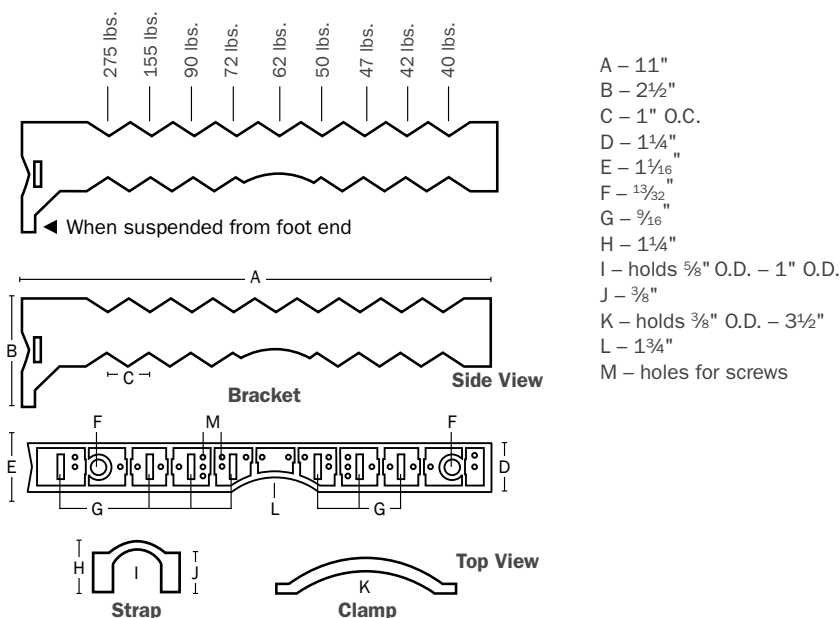

Installation Instructions

1. Secure bracket to wall, stud or vent pipe with stainless steel band or clamp. Or, suspend bracket overhead using two 3/8" threaded rods.
2. Insert 2 screws into each strap.
3. Install strap(s) into bracket channel and push down. Tighten screws securely.

24110 South Peculiar Drive
Peculiar, Missouri 64078
P 1.800.821.3944
F 1.800.758.5950

#IS-PIPETITAN 01/15

Supply Drainage Support

www.siouxchief.com

TAKE THE FIELD.

