



Standard Framed sliding bath door 500C-59

Features

- Framed, 1/8" (3 mm) thick tempered glass.
- Tempered glass ensures maximum safety and durability.

Material

- Anodized aluminum prevents rust and corrosion.

Installation

- Out-of-plumb adjustability simplifies installation.
- Not for use in hospitality.
- For residential use only.

Recommended Products/Accessories

K-23723 Faucet cleaner

Included Components

Additional Components:
Hardware kit



Codes/Standards

ANSI Z97.1
CPSC 16CFR 1201

DISCONTINUED

STERLING® Warranty - Bath and Shower Doors

See website for detailed warranty information.

Available Glass Options

Code	Description
	Clear


DISCONTINUED

This product has
been discontinued.

1-800-STERLING (1-800-783-7546)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to www.sterlingplumbing.com.

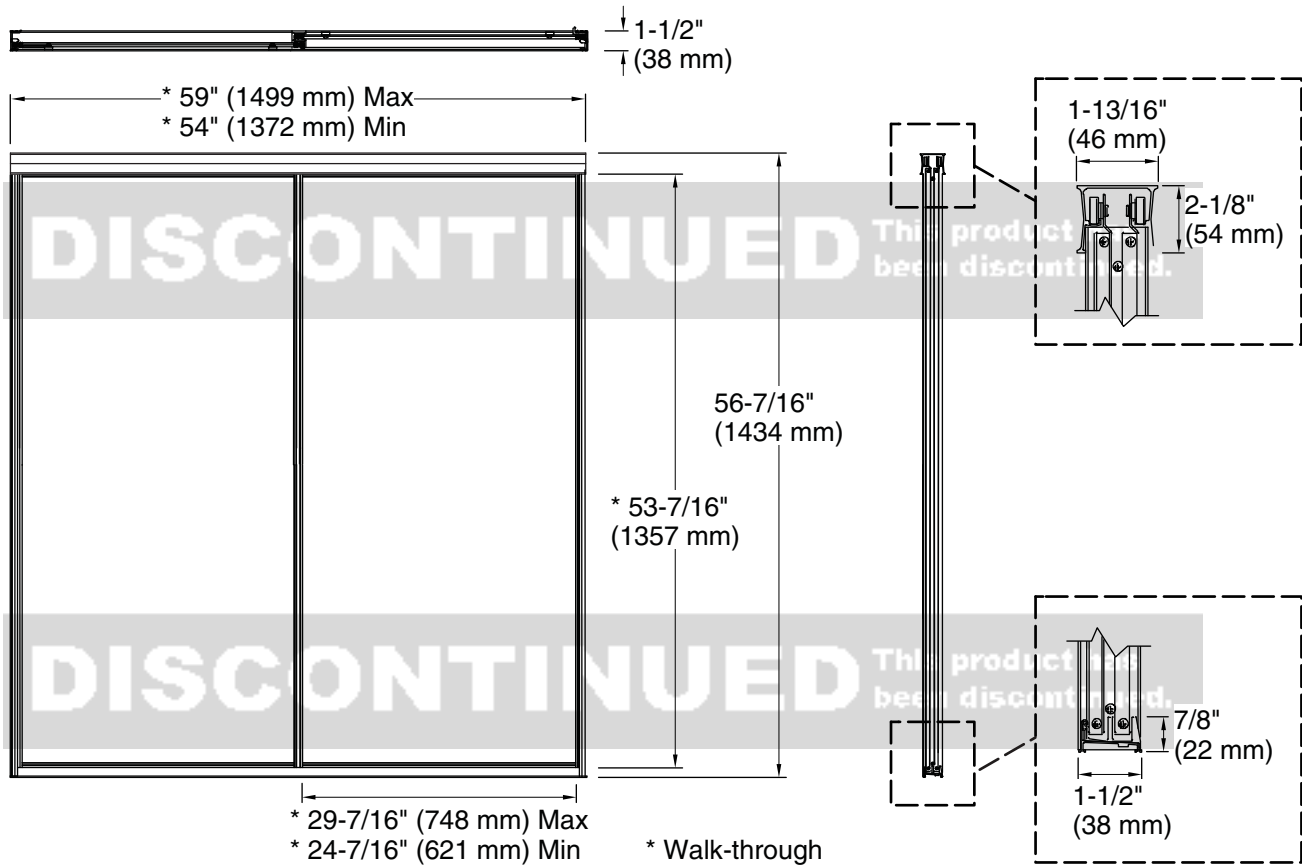

Technical Information

All product dimensions are nominal.

Installation type: For bath installation

Opening Width - Min: 54" (1372 mm)

Opening Width - Max: 59" (1499 mm)

Walk-through - Min: 24-7/16" (621 mm)

Walk-through - Max: 29-7/16" (748 mm)

Base-To-Wall Radius - Max: 1/4" (6 mm)

Glass thickness: 1/8" (3 mm)

Notes

Install this product according to the installation guide.

The vertical opening should be a minimum of 58" (1473 mm) to allow for installation clearance.