



Deluxe

Framed sliding shower door

5960-59

Features

- Framed, 1/8" (3 mm) thick tempered glass.
- Towel bar.
- Tempered glass ensures maximum safety and durability.

Material

- Anodized aluminum prevents rust and corrosion.

Installation

- Out-of-plumb adjustability simplifies installation.
- Not for use in hospitality.
- For residential use only.

Recommended Products/Accessories

K-23723 Faucet cleaner

Included Components

Additional Components:

Hardware kit



Codes/Standards

ANSI Z97.1

CPSC 16CFR 1201

STERLING® Warranty - Bath and Shower Doors

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

| Color | Code | Description |
|-------|------|-------------|
|-------|------|-------------|



| | |
|---|--------|
| S | Silver |
|---|--------|

Available Glass Options


| Code | Description |
|------|-------------|
|------|-------------|

| | |
|--|---------|
| | Pebbled |
|--|---------|

1-800-STERLING (1-800-783-7546)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to www.sterlingplumbing.com.

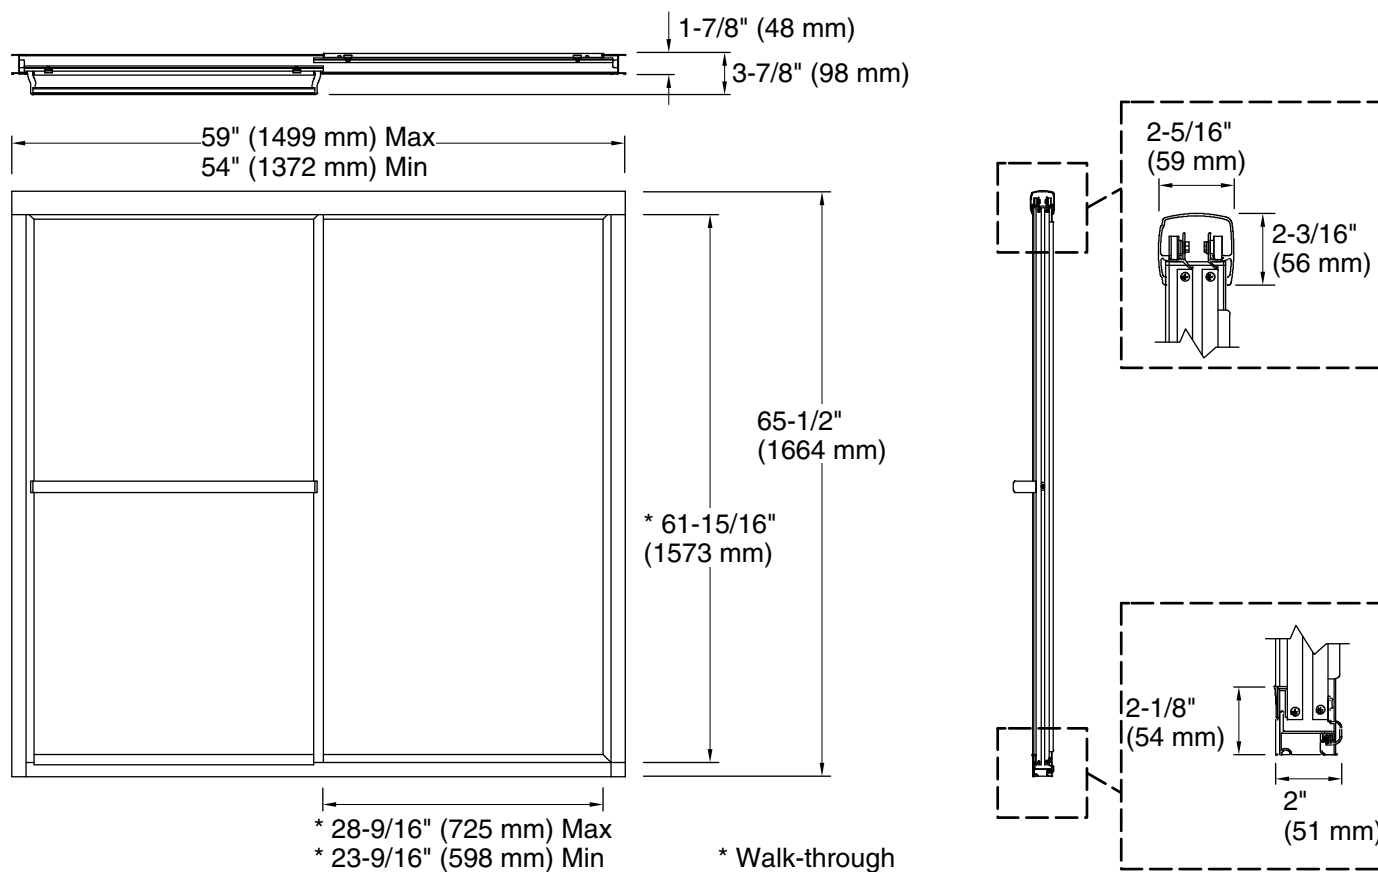

Technical Information

All product dimensions are nominal.

| | |
|----------------------------|------------------------------|
| Installation type: | For shower base installation |
| Opening Width - Min: | 54-3/8" (1381 mm) |
| Opening Width - Max: | 59-3/8" (1508 mm) |
| Walk-through - Min: | 23-9/16" (598 mm) |
| Walk-through - Max: | 28-9/16" (725 mm) |
| Base-To-Wall Radius - Max: | 1/2" (13 mm) |
| Glass thickness: | 1/8" (3 mm) |

Notes

Install this product according to the installation guide.

The vertical opening should be a minimum of 66-15/16" (1700 mm) to allow for installation clearance.