

Wirsbo hePEX™ Tubing, Straight Lengths

Submittal Information
Revision H: Dec. 7, 2015

Project Information

Job Name:

Location:

Part No. Ordered:

Engineer:

Date Submitted:

Contractor:

Submitted By:

Manufacturer's Representative:


Approved By:

Technical Data

Material: Crosslinked polyethylene
PEX-a Engel Method

Standard Grade 200°F (93°C) at 80 psi
Hydrostatic Ratings 180°F (82°C) at 100 psi
(PPI): 73.4°F (23°C) at 160 psi

Linear Expansion Rate: 1.1"/10°F/100' (27.94mm/5.56°C/30.48m)

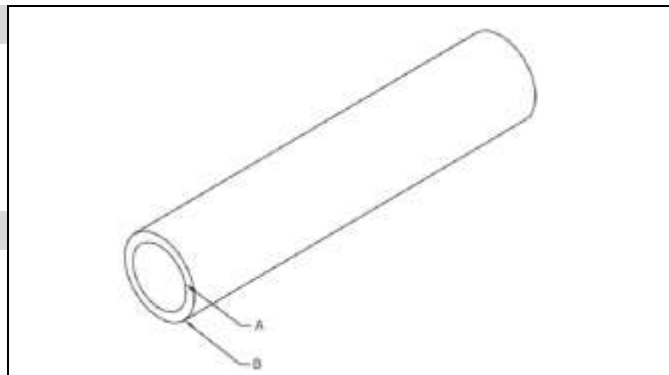

Product Information and Application Use

Wirsbo hePEX™ tubing is used for closed-loop heating and cooling applications, including radiant and hydronic distribution. Wirsbo hePEX tubing has an EVOH oxygen diffusion barrier that meets German DIN 4726/9. A polyethylene layer extruded over the EVOH barrier protects tubing from site abuse and moisture saturation.

✓ Description	Part Number	A	B	Bundle Weight
½" Wirsbo hePEX, 20-ft. straight length, 500 ft. (25 per bundle)	A1930500	0.475"	0.625"	26.48 lbs.
⅝" Wirsbo hePEX, 20-ft. straight length, 300 ft. (15 per bundle)	A1930625	0.574"	0.750"	22.79 lbs.
¾" Wirsbo hePEX, 20-ft. straight length, 300 ft. (15 per bundle)	A1930750	0.671"	0.875"	30.07 lbs.
1" Wirsbo hePEX, 20-ft. straight length, 200 ft. (10 per bundle)	A1921000	0.862"	1.125"	34.19 lbs.
1¼" Wirsbo hePEX, 20-ft. straight length, 100 ft. (5 per bundle)	A1921250	1.054"	1.375"	24.10 lbs.
1½" Wirsbo hePEX, 20-ft. straight length, 100 ft. (5 per bundle)	A1921500	1.244"	1.625"	34.93 lbs.
2" Wirsbo hePEX, 20-ft. straight length, 100 ft. (5 per bundle)	A1922000	1.629"	2.125"	60.10 lbs.
2½" Wirsbo hePEX, 10-ft. straight length, 30 ft. (3 per bundle)	A1912500	2.011"	2.625"	27.70 lbs.
2½" Wirsbo hePEX, 20-ft. straight length, 60 ft. (3 per bundle)	A1922500	2.011"	2.625"	55.30 lbs.
3" Wirsbo hePEX, 10-ft. straight length, 30 ft. (3 per bundle)	A1913000	2.400"	3.125"	38.90 lbs.
3" Wirsbo hePEX, 20-ft. straight length, 40 ft. (2 per bundle)	A1923000	2.400"	3.125"	51.90 lbs.
3" Wirsbo hePEX, 10-ft. straight length, 30 ft. (3 per bundle)	A1913500	2.784"	3.625"	52.10 lbs.
3½" Wirsbo hePEX, 20-ft. straight length, 40 ft. (2 per bundle)	A1923500	2.784"	3.625"	69.50 lbs.
4" Wirsbo hePEX, 10-ft. straight length, 20 ft. (2 per bundle)	A1914000	3.209"	4.125"	45.00 lbs.
4" Wirsbo hePEX, 20-ft. straight length, 10 ft. (1 per bundle)	A1924000	3.209"	4.125"	45.00 lbs.

Installation

Use ProPEX® fittings for pipe sizes to 3".¹ Use WIPEX™ fittings for 3½" and 4" pipe. Refer to the Uponor Complete Design Assistance Manual (CDAM) or the Uponor Hydronic Piping Design Assistance Manual (HPDAM) for additional information.

Listings²

cNSFus-rfh; cNSFus-pw; cQAIus P321; UL; CSA; ETL; PPI TR-4; ICC-ES; CCMC

Codes

ICC; IPC; IMC; IRC; UPC; UMC; NSPC; HUD; UFGS; NPC of Canada; NBC of Canada; IAPMO

Standards

ANSI/NSF 14; ANSI/NSF 61; ASTM F876; ASTM F877; ASTM F1960; ASTM F2023; ASTM E84; CAN/ULC S102.2; ASTM E119/UL 263; CAN/ULC S101; ASTM E814/ULC S115; CSA B137.5; CSA B214; DIN 4726/9; AWWA C904³

Related Applications

Radiant Heating and Cooling Systems
Snow and Ice Melting Systems
Permafrost Protection Systems
Turf Conditioning Systems
Chilled Water Distribution
Hot Water Distribution

Contact Information

<p>Uponor, Inc. 5925 148th Street West Apple Valley, MN 55124 USA Phone: 800.321.4739 Fax: 952.891.2008 www.uponorpro.com</p>	<p>Uponor Ltd. 2000 Argentia Road, Plaza 1, Suite 200 Mississauga, ON L5N 1W1 CANADA Phone: 888.994.7726 Fax: 800.638.9517 www.uponorpro.com</p>
--	--

¹ProPEX® is a registered trademark of Uponor, Inc. ProPEX™ is a trademark of Uponor Ltd.

²Visit listing agency's website for complete information.

³For ¾" to 3" pipe.