


Powerhead for Stainless Manifold (24V 2-wire)



Dimensions

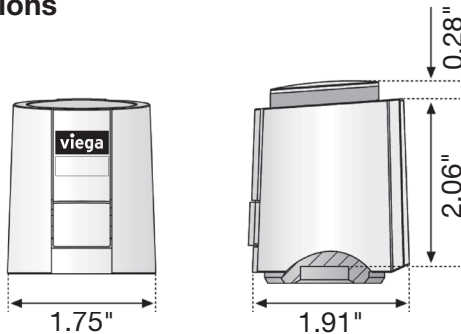

Applications

Powerhead part number 15070 is a two position actuator which mounts on the return valve of the stainless manifold. A 24 V signal actuates the head to open the valve. The position of the valve is normally closed.

The powerhead may be used on both 1¼" stainless shut off/balancing and stainless shut off/ balancing/flow meter manifolds.

Features

- Light gray in color, Viega logo on front
- Normally closed
- Water resistant
- All around function indicator
- 360° installation position
- Snap-on installation
- Valve adapter concept
- Initially-Open function
- May be installed in any position

Specifications

- Voltage: 24V
- Max Inrush Current: 300 mA for 2 minutes maximum
- Operating Power: 1W
- Closing/Opening Time: Approximately 3 minutes
- Stroke: 4 mm
- Actuating Force: 21lbs.
- Weight: 3.5 oz.
- Fluid Temperature: 32°F - 212°F
- Cable Length: 3.28'

ON/OFF Indicator

The powerhead has a cylinder on the top that will raise and expose blue when the valve is open. You will be unable to see any blue when the valve is in its normal closed position.

Initially-Open Function

The powerhead is delivered in the open position. This allows for easier installations and also allows for the installer to pressure and flow test each circuit before connecting the power.

This function is disengaged automatically after the first 6 minutes of powered use.