



Accord®  
48-1/4" x 36" seated shower stall w/ AIP backerboards  
72280106



## Features

- 3-1/2" threshold.
- Durable high-gloss finish.
- Center drain.
- Pivot snap-together modular design.
- Removable seat.
- Aging in Place backerboards.

## Material

- Made from solid Vikrell® material for strength, durability, and lasting beauty.

## Installation

- Alcove.
- Caulk-free installation.

## Recommended Products/Accessories

- 1500D-48 Framed pivot shower door
- 1505D-48 Framed pivot shower door
- 1506D-48 Framed pivot shower door
- 1530D-48 Framed pivot shower door
- 1535D-48 Framed pivot shower door
- 5475-48 Frameless sliding shower door
- 5477-48 Frameless sliding shower door
- 5970-48 Framed sliding shower door
- 5975-48 Framed sliding shower door
- 5976-48 Framed sliding shower door
- 5977-48 Framed sliding shower door
- 547808-48 Frameless sliding shower door
- 581075-48 Frameless sliding shower door
- 80001012 12" straight grab bar
- 80001018 18" straight grab bar
- 80001024 24" straight grab bar
- 80011032 32" straight grab bar
- 80001036 36" straight grab bar
- 80012222 22" curved grab bar
- 72286104 Removable bath seat for Series 7228 and 7229
- K-23726 Drain treatment
- K-23733 Vikrell® cleaner



## Codes/Standards

- ASTM E162
- ASTM E662
- HUD, UM Bulletin 73

## Warranty – Bathing Fixtures (and) Kitchen and Utility Sinks Made of Solid Vikrell® Material

See website for detailed warranty information.

## Available Colors/Finishes

*Color tiles intended for reference only.*


### Color   Code   Description

	0	White
	96	KOHLER Biscuit

## Included Components

Product consists of:

- 72284106 55-1/8" x 48" shower stall w/ grab bars
- 72281100 48-1/4" x 36" seated shower base

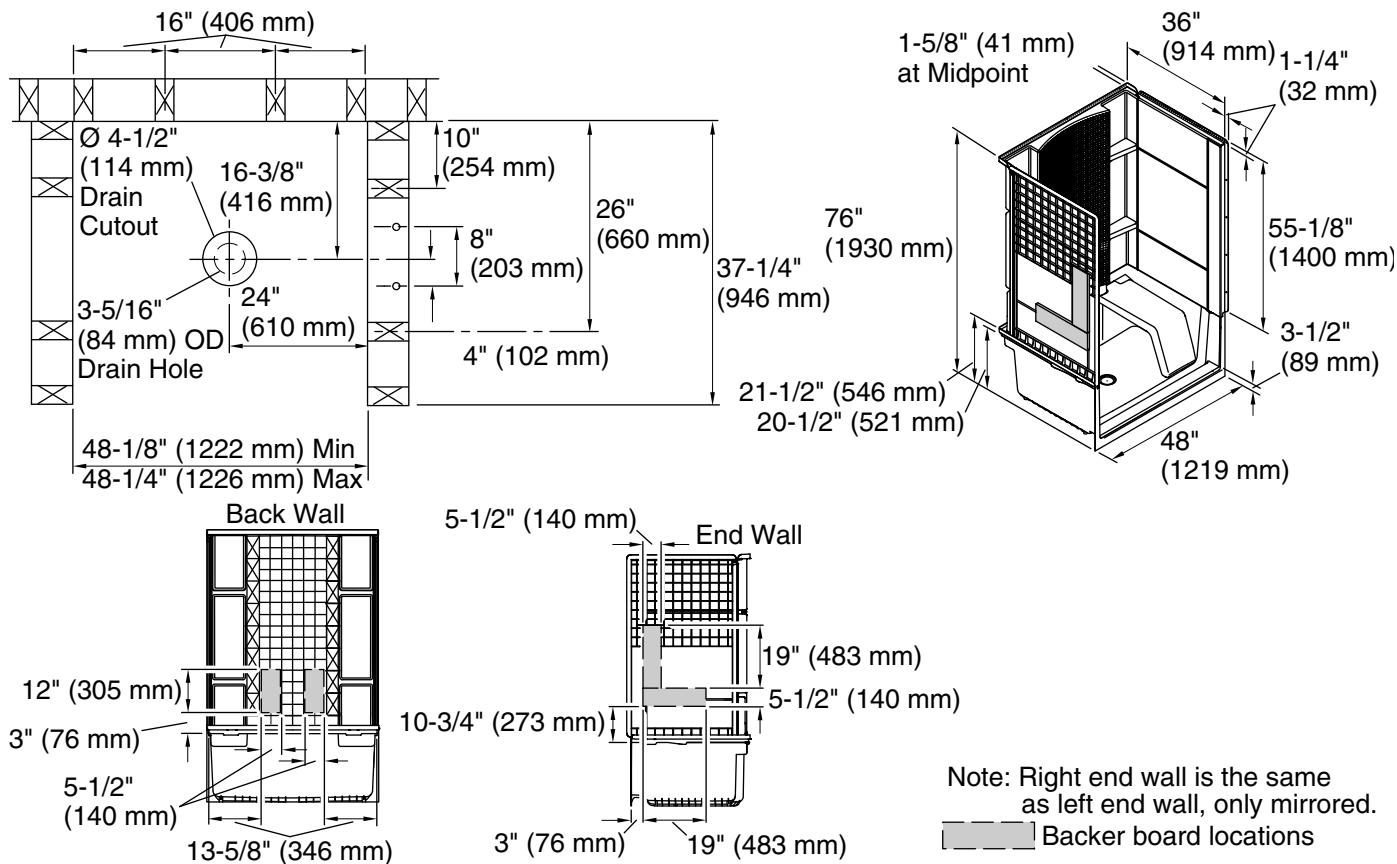

## Technical Information

All product dimensions are nominal.

Installation:	Three-wall alcove
Drain location:	Center
Maximum door height:	70-5/8" (1794 mm)
Maximum door width:	44-5/8" (1133 mm)

## Notes

Install this product according to the installation instructions.

Base cannot be installed without the wall surround.

Studs should be positioned roughly as shown.

Double studding is recommended for pivot shower door installations.