

BISMAT® 2000



NOISE REDUCING



Tested in accordance with ISO 3822-1





Product Specifications:

- For use with all metal pipes
- Double screw clamp features a swivel opening
- Features our patented quick-locking system
- Noise and vibration reducing lining according to DIN 4109
- Complies with Federal Specification WW-H-w171E and A-A-1192A Type 4 and Manufacturers Standardization Society MSS-SP-58 and SP-69 Type 12
- Contains no plastizers
- Plenum rated - tested to ASTM E-84
- Materials: zinc plated steel 1.0332, age-resistant lining: EPDM rubber

Item Number	D (mm)	D / CTS (inches)	D / IPS (inches)	B (inches)	b (inches)	G (inches)	H (inches)	h (inches)	Fa,z (lbs)	Items per pkg
CR3409070	64-70	2-1/2	-	4.5	0.90	3/8	3.9	0.87	210	50
CR3409080	73-80	3	2-1/2	5.0	0.90	3/8	4.3	2.4	210	50
CR3409091	83-91	-	3	5.4	0.98	3/8	4.8	2.6	210	25
CR3409105	100-105	4	-	6.0	0.98	3/8	5.3	2.9	210	25
CR3409114	108-114	-	4	6.3	0.98	3/8	5.7	3.1	210	25
CR3408125	122-125	-	-	6.78	1.22	3/8	6.58	3.78	-	25
CR3408141	133-141	-	5	7.36	1.22	3/8	7.13	4.05	-	25

The maximum allowed load (Fa,z) is calculated using specific statistical methods related to the breaking load, taking into account a deflection of 0.060" (1.5mm) or 2% of the maximum nominal clamp diameter. The test results are certified and monitored by an independent test institute.

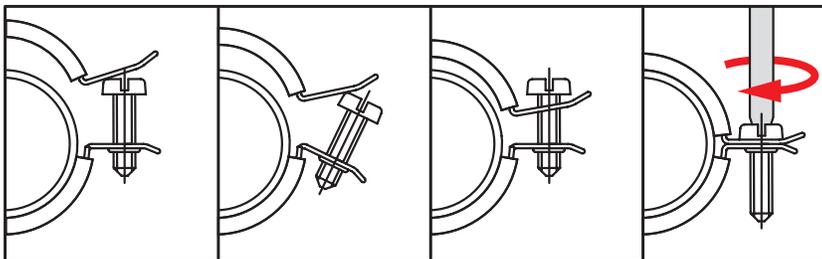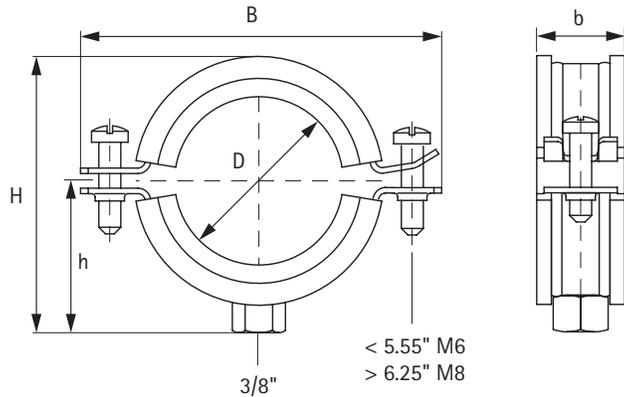

Product Submittal

Job Name:	
Date:	
Part No.	Qty:
Architect / Owner:	
Contractor:	
Notes:	

THE INFORMATION CONTAINED IN THIS SUBMITTAL SHEET IS PROPRIETARY TO WALRAVEN, INC. AND IS SUBJECT TO CHANGE WITHOUT NOTICE. THIS INFORMATION MAY NOT BE REPRODUCED IN PART OR WHOLE WITHOUT WRITTEN AUTHORIZATION FROM WALRAVEN, INC.

