

## Tools and Materials



Adjustable  
Wrench



Pliers



Drill




Socket Wrench  
W/Sockets

## Before You Begin

**IMPORTANT:** The instructions and hardware supplied in this package should only be used when a header is unavailable to support the pedestal lavatory.

- Observe all local plumbing and building codes.
- Use these instructions along with the installation guide supplied with the pedestal lavatory to complete the installation.
- Refer to the fixture dimensions shown in the pedestal lavatory's installation guide for further installation considerations.

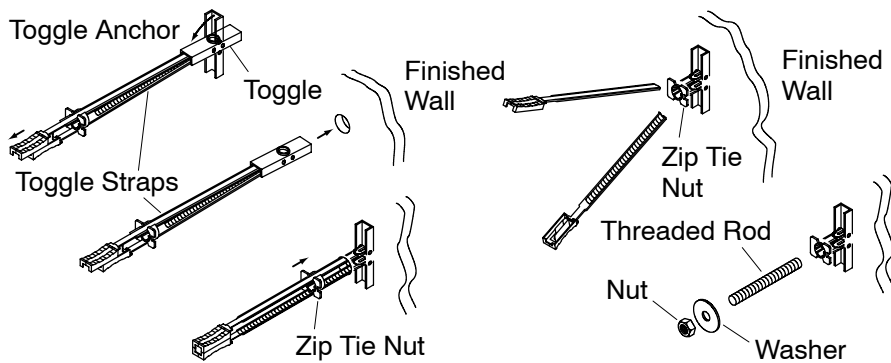

## Install The Wall Mount Fasteners

**NOTE:** These instructions and provided hardware are to secure a pedestal lavatory basin against a finished wall. Use the lavatory's installation guide to finish the installation after the wall fasteners have been installed.

- Redrill each wall's mounting hole with a 1/2" drill bit until it passes through the finished wall.
- Insert the toggle end of a toggle anchor into the hole. Continue to insert the toggle anchor until the toggle has cleared the wall.
- Slowly pull the toggle anchor toward you until the toggle is secure against the inside wall.
- Continue pulling the toggle anchor while sliding the zip tie nut down the toggle straps until the nut is anchored against the wall.
- Separate the toggle straps until each one snaps off at the zip tie nut.
- Insert a threaded rod into the zip tie nut so it extends a minimum of 1-3/8" (3.5 cm) from the finished wall.
- Repeat the above procedures for the second wall hole.
- Resume installation instructions in the pedestal lavatory's installation guide.

**NOTE:** Use the nuts and washers provided in the accessory pack to mount the lavatory to the threaded bolts.

USA: 1-800-4-KOHLER  
 Canada: 1-800-964-5590  
 Mexico: 001-877-680-1310  
 kohler.com  
 © 2005 Kohler Co.

1041422-9-A