
# **BUILDER SERIES**









Tartane (Tile Flange)

| Rough-In Dimensions | CT-S-6060<br>CT-IF-6060 | 61-1/4" wide x 61-1/4" deep x 23-3/4" high |
|---------------------|-------------------------|--|
| Finished Dimensions | CT-S-6060<br>CT-IF-6060 | 60" deep x 60" deep x 22-1/2" high         |

## **Unit Features**

- Sanitary Grade Polyester Gelcoat Surface
- 2" Dia. Front Center Drain (see reverse side for location)
- 2-1/2" Dia. Overflow (see reverse side for location)
- Twin, Contoured Armrests (on each side)
- "S" Model: Integral Tile Flange & Full Apron
- "IF" Model: Integral Tile Flange & Partial Apron
- Removable Apron Access Panel Included on "S" Model
- Pre-Leveled Block Base System
- Balsa Wood Core Floor Structure
- Textured Floor Pattern

## **Special Notes**

- UL Listed Hydrotherapy Systems
- Model Available In Self-Rimming Design

## **Gelcoat Unit / System Order Number**

CT-S-6060 (soaking tub) CT-S-6060 / VHS (Villa System) CT-S-6060 / IHS (InVigor System)

CT-IF-6060 (soaking tub) CT-IF-6060 / VHS (Villa System) CT-IF-6060 / IHS (InVigor System)

System Trim

Standard VHS & IHS Trim (order code): White trim on White unit (WHT)

## **BUILDER SERIES**

#### **Order Code / Description**

IHS InVigor Hydrotherapy System: All white components including, (6) Slimline adjusta-flo, multi-directional jets, (4) Slimline micro back jets, variable flow control, twin air controls, electronic system control with 20-min timer, 13.0 amp pump, and a removable

access panel (S model).

VHS: Villa Hydrotherapy System: All white components including, (8) Slimline micro jets, pneumatic system control, 7.50 amp pump, and a removable access


panel (S model).

#### **Order Code / Description**


Options: CHR: Chrome Jet Trim Ring Upgrade


(IHS only)

ILH: In-Line Heater (factory installed)
MP/B: Alternate Pump Location (site installed)

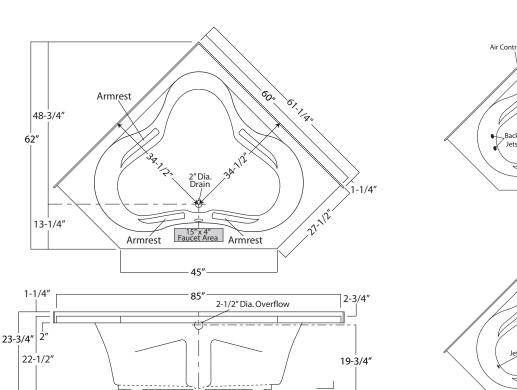

1" Drain Clearance





Tartane: CT-IF-6060 (illustrated)

(S model full apron extends down to room floor)

Sump Dimen: 20-1/4" deep

Sump Capacity: 92 gal. (unoccupied - to overflow)

**Leveling Supports** 

Whirlpool Operating: 38 gal.

