


Hanging Clamps and Accessories

BISMAT® 2000 Clamp



- For use with all metal pipes
- Double screw clamp features a swivel opening
- Features our patented quick-locking system
- Noise and vibration reducing lining according to DIN 4109
- Complies with Federal Specification WW-H-w171E and A-A-1192A Type 4 and Manufacturers Standardization Society MSS-SP-58 and SP-69 Type 12
- Contains no plastizers
- Plenum rated - tested to ASTM E-84
- Materials: zinc plated steel 1.0332, age-resistant lining: EPDM rubber

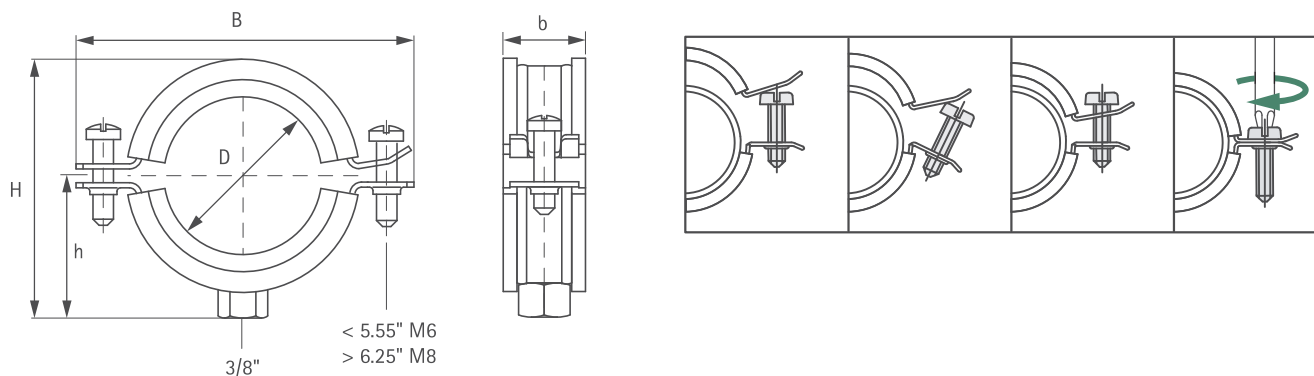

Item number	Replaces item #	D / CTS (inches)	D / IPS (inches)	D (mm)	B (inches)	b (inches)	H (inches)	h (inches)	Fa,z (lbs.)	Items per pkg.
CR3408070	CR3409070	2-1/2	-	64-70	4.5	0.90	3.9	0.87	210	50
CR3408080	CR3409080	3	2-1/2	73-80	5.0	0.90	4.3	2.4	210	50
CR3408091	CR3409091	-	3	83-91	5.4	0.98	4.8	2.6	210	25
Features dual nut										
CR3408105	CR3409105	4	-	100-105	6.0	0.98	5.3	2.9	210	25
CR3408114	CR3409114	-	4	108-114	6.3	0.98	5.7	3.1	210	25
CR3408125	-	-	-	122-125	6.78	1.22	6.58	3.78	-	25
CR3408141	-	-	5	133-141	7.36	1.22	7.13	4.05	-	25

The maximum allowed load (Fa,z) is calculated using specific statistical methods related to the breaking load, taking into account a deflection of 0.060" (1.5mm) or 2% of the maximum nominal clamp diameter. The test results are certified and monitored by an independent test institute.