SPECIFICATION AND INSTALLATION GUIDE





T24-GI


Traffic rated 24" cast iron cover

For use with grease interceptors models GB-50, GB-75, GB-250, GB-500, GB-1000 and GB-1500; solids interceptors models SI-50, SI-75, SI-250 and SI-500; inspection port models SV24 and SV24-O.

Unit weight: 91 lbs.

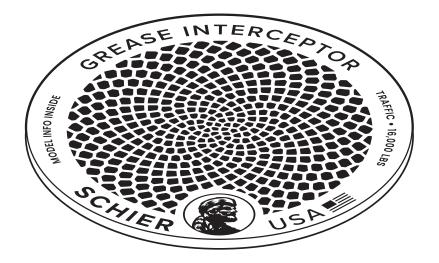







Replace temporary cover

Base tank models ship from the factory with temporary (jobsite only) cover(s) effective July 14, 2025. The T24-GI cover is sold separately from the base model (grease interceptor, solids interceptor or inspection port) and shall be applied by contractor during finish installation.



Gasket

The T24-GI includes a gasket on the bottom side that ensures a gas/water tight seal.



Buried installation

Choose T24-GI for buried installations where H-20 loads are required. H-20 rated to 16,000 lbs. per AASHTO M306.



MODEL NUMBER: T24-GI

DESCRIPTION: Cover, 24in traffic rated, grease interceptor system

PART #: 8044-000-01

DATE: 07/07/2025

REV:

ECO: