

Job Name:	
Job Location:	
Contractor:	
Engineer:	
Approval:	

Poly-End Male Adapters


Design Features:

- · Continental's Patented "ID Seal"
- For Underground PE Pipe (ASTM D 2513) Only
- Yellow Medium Density Polyethylene PE2406
- Corrosion Resident Epoxy Coating
- Made in the USA

Operating Specifications:

Temperature: -20° to 140° F

Pressure: 100 psi

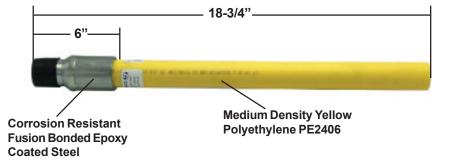





You must use a Continental Chamfer Tool on a Continental Fitting



NFPA 58, LP-Gas Code
NFPA 54, National Fuel Gas Code
IAPMO - Uniform Plumbing Code
ICC - International Plumbing Code
Approved by the Commonwealth of Massachusetts
D.O.T., Title 49 of the Code of Federal Regulations, Part 192.283 (b)
ASME B31.8-1995 "Gas Transmission and Distribution Piping Systems"
ASTM D 2513 "Standard Specifications for Thermoplastic Gas Pressure Pipe, Tubing and Fittings

W-R#	Size	Wall Thickness	Steel Length	Overall Length	Weight	Required Chamfer Tool
2885050	3/4" IPS	SDR-11	6"	18-3/4"	.843 lbs.	2888014
2885052	1" IPS	SDR-11	6"	18-3/4"	1.18 lbs.	2888016
2885070	1" CTS	.099/.101 Wall	6"	18-3/4"	1.05 lbs.	2888022
2885054	1-1/4" IPS	SDR-10	6"	18-3/4"	1.70 lbs.	2888006
2885055	1-1/4" IPS	SDR-11	6"	18-3/4"	1.73 lbs.	2888007
2885056	1-1/2" IPS	SDR-11	6"	18-3/4"	2.72 lbs.	2888008
2885058	2" IPS	SDR-11	6"	18-3/4"	4.24 lbs.	2888010