

McAllister® Under-Mount Kitchen Sink 11444

Features

- No faucet holes; requires wall- or counter-mount faucet.
- 8-9/16" (217 mm) depth.
- 3-5/8" (92 mm) drain opening.
- Stainless steel with luster finish.

Material

Premium 18-gauge stainless steel.

Installation

Undermount.

Recommended Products/Accessories

7400 Sink Strainer 11861 Sink Rack K-6139 Sponge Caddy K-23726 Drain treatment K-23729 Stainless steel cleaner

Included Components

Product consists of: 91915 Hardware Kit



Codes/Standards

ASME A112.19.3/CSA B45.4


STERLING® Warranty - Stainless Steel Sinks

See website for detailed warranty information.





McAllister®


Under-Mount Kitchen Sink 11444

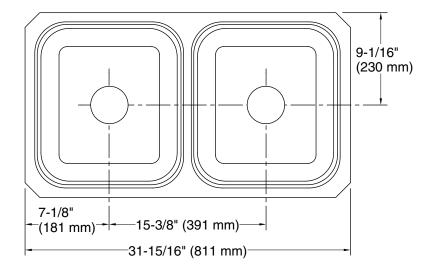


Mounting bracket assembly provides a secure installation.





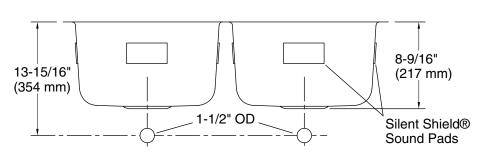



Technical Information

All product dimensions are nominal.

Bowl configuration: Double equal Installation: **Under-mount** 36" (914 mm)

Min. base cabinet

width: Bowl area (Left):

Length: 14-1/16" (357 mm)

Width: 15-3/4" (400 mm) Bowl depth: 8-9/16" (218 mm)

Water depth: 8-1/16" (205 mm)

Bowl area (Right): Length: 14-1/16" (357 mm) Width: 15-3/4" (400 mm)

Bowl depth: 8-9/16" (218 mm) Water depth: 8-9/16" (218 mm)

Drain hole: 3-5/8" (92 mm)

1315846-7, required, included Template:

Notes

Install this product according to the installation instructions.

Measure your actual product for roughing-in details.

Use the supplied cut-out template to select either a hidden or exposed rim.

Minimum base cabinet width: 33"-36" (33"

cabinet may require cabinet modifications). Consult an installer for confirmation before

proceeding.