



**Dexter™**  
1-Pint Urinal  
**K-5452-ET**

## Features

- Washout urinal.
- 3/4" (19 mm) top spud.
- 1 pint or 0.125 gpf (0.47 lpf).
- Includes inlet and outlet spuds and hangers.
- Includes anti-backsplash wall.
- 14-3/4" (375 mm) extended rim.

## Material

- Vitreous china.

## Recommended Products/Accessories

- K-23726 Drain treatment
- K-23725 Cast iron cleaner
- K-7528 Touchless hybrid 0.125 gpf washdown urinal flushometer
- K-7546 Exposed hybrid 0.125 gpf washdown urinal flushometer
- K-7546-RF
- K-13520 Manual 1/8 GPF Urinal Flushometer
- K-76317 Manual 1/8 GPF Urinal Flushometer

## Included Components

### Additional Components:

- 2" outlet spud
- 3/4" inlet spud
- Hanger(s)



**ADA**



## Codes/Standards

- ASME A112.19.2/CSA B45.1
- DOE - Energy Policy Act 1992
- EPA WaterSense®
- California Energy Commission (CEC)
- ADA
- ICC/ANSI A117.1

## KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

## Available Colors/Finishes


*Color tiles intended for reference only.*

### Color   Code   Description

|  |    |              |
|--|----|--------------|
|  | 0  | White        |
|  | 96 | Biscuit      |
|  | 47 | Almond       |
|  | 7  | Black Black™ |



**Dexter™**  
1-Pint Urinal  
**K-5452-ET**

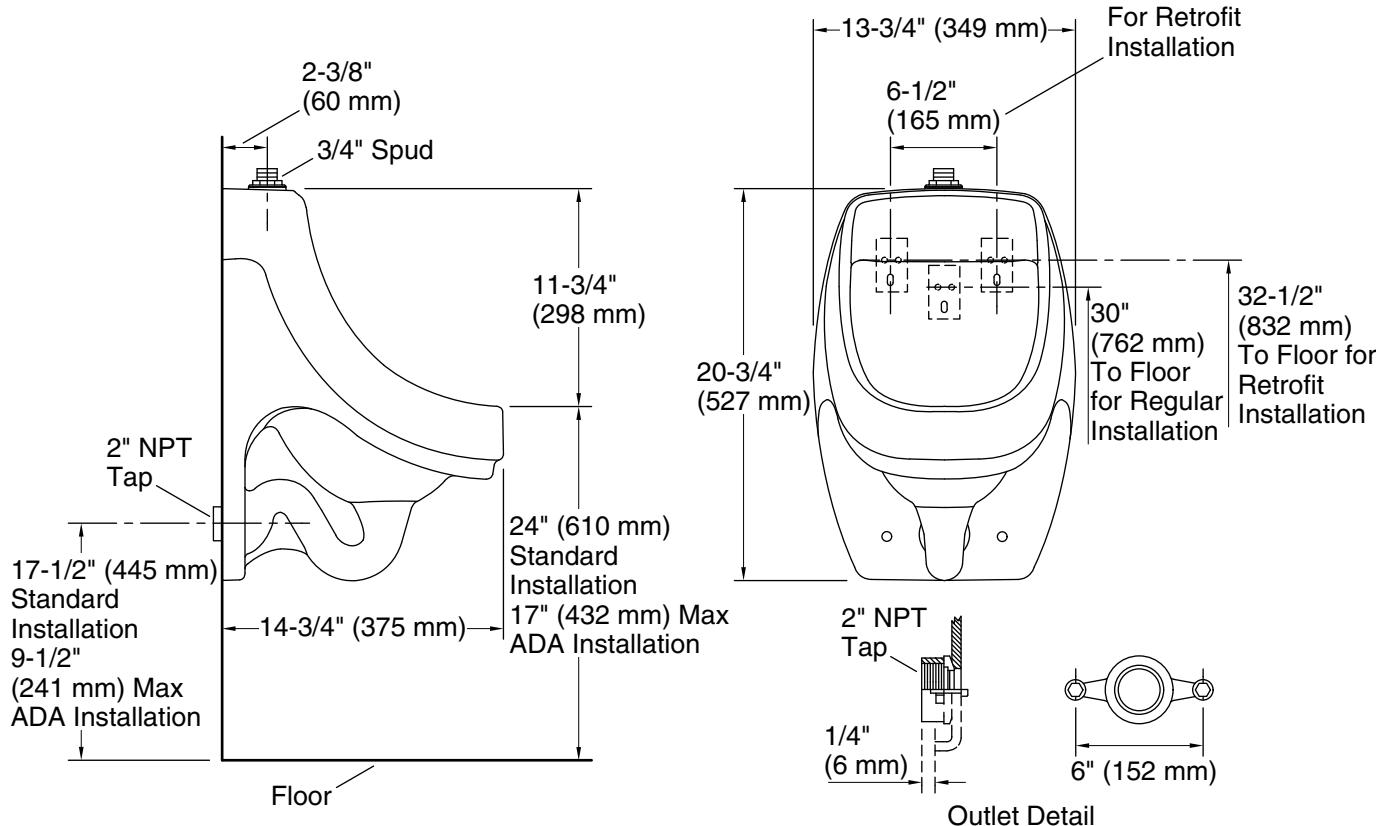

### Technical Information

All product dimensions are nominal.

Flush outlet technology: Washout

Spud size: 3/4", Inlet, Top

Min. Water per Flush: 0.125 gal (0.5 L)

Max. Water per Flush: 0.125 gal (0.5 L)

Designed for the above water use when installed with a water-saving flushometer.

### Pressure and Supply Requirements

Fixture pressure min 25 psi (172.4 kPa)  
(static):

Fixture pressure max (static): 80 psi (551.6 kPa)

### Notes

Designed only for use with a 0.125 gpf (0.5 lpf) flushometer.

Install this product according to the installation instructions.

Recommended ADA outlet spud height will account for normal product variation.

For ADA compliance, measurement must be 17" (432 mm) or less from the floor to the top of the lip.

ADA compliant when installed to the specific requirements of these regulations.