

Features

- 1.28 gpf (4.8 lpf).
- 125-micron filter protects internal components.
- High back pressure vacuum breaker.
- Locking stop cap and nonhold open design provide protection against vandalism.
- No external flush volume adjustment ensures water conservation.
- Chloramine and chlorine resistance on all rubber components exposed to waterway.

Material

- Brass construction with durable Polished Chrome finish.

Technology

- Double seal handle design for long life without leaks.
- Patented piston technology for superior flush volume accuracy.
- Nonhold open piston technology for accurate activation.

Installation

- For toilet installations with 1-1/2" top spud coupling connection.
- Can be installed for left- or right-handed users.

Recommended Products/Accessories

K-23723 Faucet cleaner



ADA

CSA B651

OBC

Codes/Standards

ASSE 1037/ASME A112.1037/CSA B125.37
EPA WaterSense®
ADA
ICC/ANSI A117.1
CSA B651
OBC

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.


Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description

	CP	Polished Chrome
---	----	-----------------

*10-3/4" (273 mm) minimum with a
6" (152 mm) critical level above the fixture

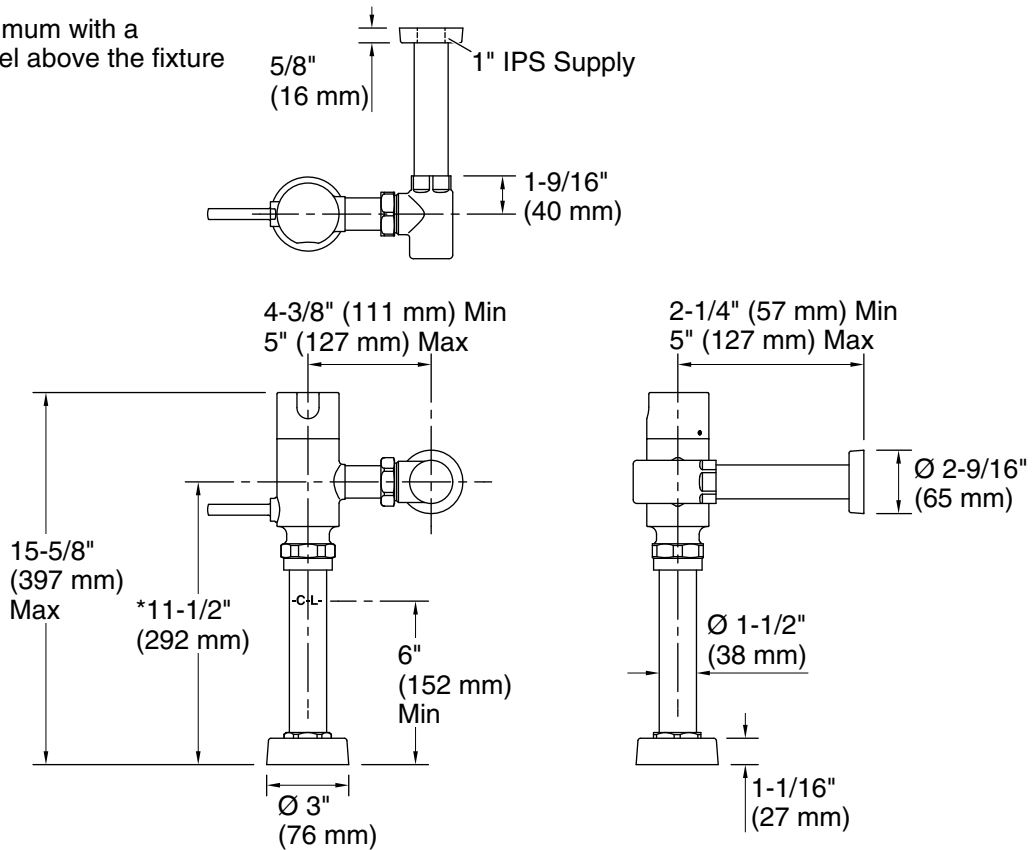

Technical Information

All product dimensions are nominal.

Fixture pressure 80 psi (551.6 kPa)
max (static):

Pressure and Supply Requirements

Fixture pressure min 35 psi (241.3 kPa)
(static):

Fixture Supply Requirements

Min static pressure: 35 psi (241.3 kPa)
Max static pressure: 80 psi (551.6 kPa)
Min flowing pressure: 25 psi (172.4 kPa)
Min flow rate: 25 gpm (94.6 lpm)

Notes

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.