

**Features**

- Pressure-balancing diaphragm technology maintains outlet temperature within +/-3°F during water pressure fluctuations
- Antiscald protection
- A single handle controls both on/off activation and temperature setting
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- Coordinates with other products in the Tone collection
- Requires Rite-Temp® pressure-balancing valve (sold separately)

**Material**

- Premium material construction with metal handle ensures reliability and durability
- KOHLER finishes resist corrosion and tarnishing

**Required Products/Accessories**

K-8304 Series Rite-Temp® Valve & Cartridge Kits

or

K-8300 Series Rite-Temp® Valve Body Rough-ins

K-8305 Series Rite-Temp® Cartridges

**Adapters, Rough-in and Extension Kits**

10350

Range: 3-1/2" (89 mm) -  
4-1/4" (108 mm)

**Optional Products/Accessories**

- K-10350 Deep rough-in kit
- K-10351 Test cap for K-8300 Series valve bodies
- 1307346 Retro mixer cap for K-304 Rite-Temp valve
- 1362395 Retro mixer cap for K-2971 HiFlow Rite-Temp valve



**Codes/Standards**

ASME A112.18.1/CSA B125.1







DOE - Energy Policy Act 1992


**KOHLER® Faucet Lifetime Limited  
Warranty**

See website for detailed warranty information.

**Available Colors/Finishes**

*Color tiles intended for reference only.*

| Color   | Code | Description                      |
|---|------|----------------------------------|
|  | CP   | Polished Chrome                  |
|  | BN   | Vibrant® Brushed Nickel          |
|  | BL   | Matte Black                      |
|  | 2MB  | Vibrant® Brushed Moderne Brass   |
|  | BMB  | Matte Black with Moderne Brass   |
|  | CBL  | Matte Black with Polished Chrome |

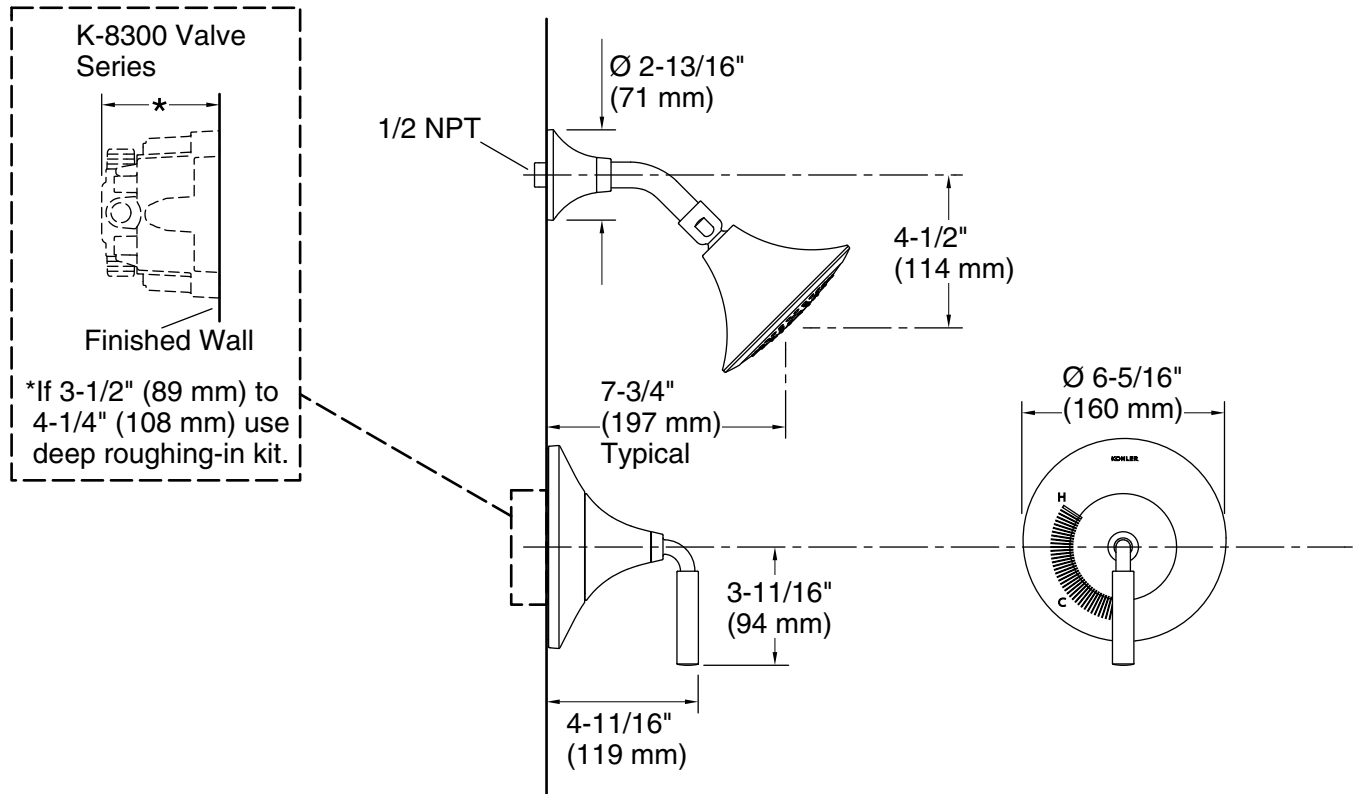

## Technical Information

All product dimensions are nominal.

### Spout:

Shower/Rainhead rated max flow: 2.5 gal/min (9.5 l/min)

## Notes

Install this product according to the installation instructions.