

Job Name/Location:

Tag No.:

Date:

For: File Resubmit

PO No.:

Approval Other

Architect:

GC:

Engr:


Mech:

Rep:

(Company)

(Project Manager)

PTVK410 Ventilation Kit with PTVK420 Flange For 4-Way Ceiling Cassettes Indoor Units

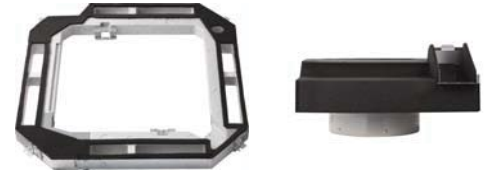

Features:

- For use with TP, TN, TM, and TA 4-Way Ceiling Cassettes.
- Easy to install.
- Tested in accordance with UL 723 Test for Surface Burning Characteristics of Building Materials (ASTM E84).

Unit Data:

Ventilation Kit Net Weight (lbs.)	9.9
Ventilation Kit Shipping Weight (lbs.)	15.0
Flange Net Weight (lbs.)	4.0
Flange Shipping Weight (lbs.)	6.1

Insulation Properties:

Material	EPS and EPDM
----------	--------------


Entering Mixed Air:

Cooling Maximum (°F W.B.)	76
Heating Minimum (°F D.B.)	59

Note:


Follow installation instructions in the applicable LG installation manual.

PTVK410 Ventilation Kit

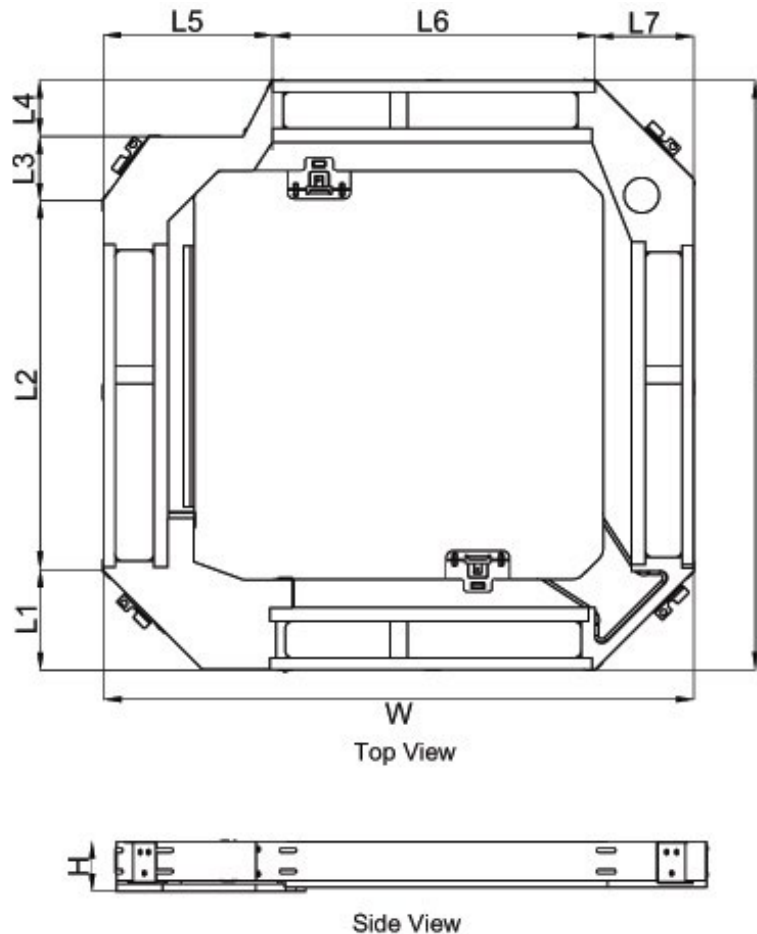

PTVK420 Flange

W	33"
D	33"
H	2 3/16"
L1	5 1/2"
L2	20 3/4"
L3	3 1/2"
L4	3 1/8"
L5	9 1/2"
L6	18"
L7	5 1/2"
L8	3 3/4"
L9	10 1/8"
L10	7 1/8"
L11	2 3/8"
L12	9 3/4"
L13	2 3/16"
L14	5 3/4"
L15	8 7/8"

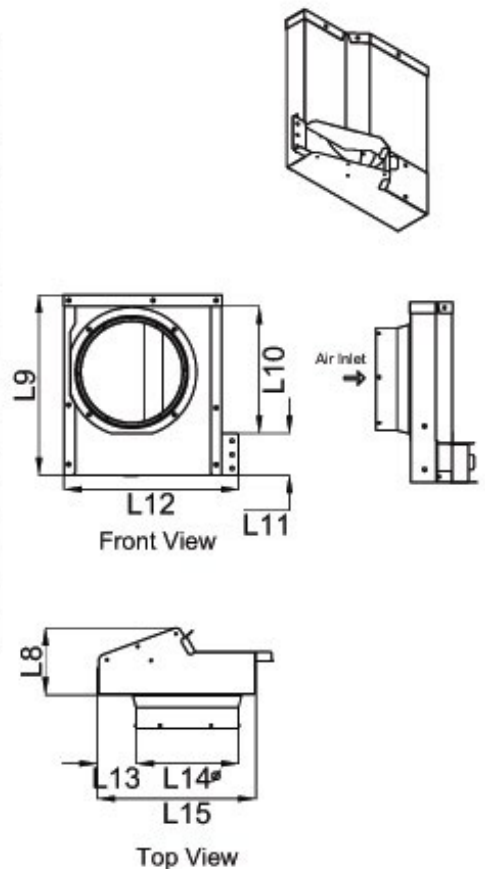

PTVK410
Ventilation Kit with PTVK420 Flange
For 4-Way Ceiling Cassettes Indoor Units




Tag No.: _____
Date: _____
PO No.: _____



Note:
Appearances will vary depending on model.

TP, TN, TM Frame Outside Air PTVK410 Ventilation Kit with PTVK420 Flange (Airflow Capacity Versus Static Pressure)

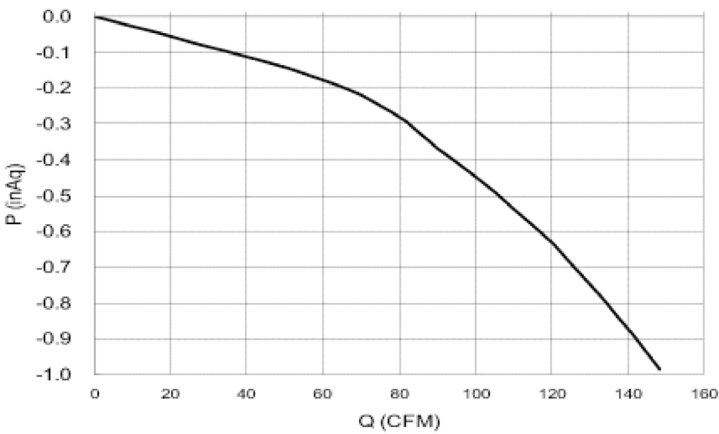

TA Frame Outside Air PTVK410 Ventilation Kit with PTVK420 Flange

