
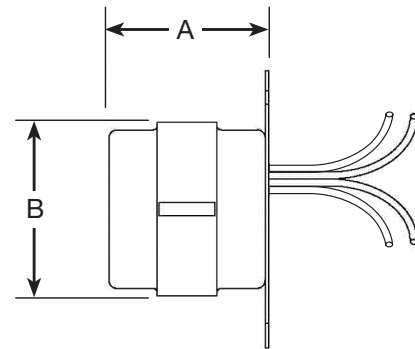


Viega® Transformer

Viega transformers are used to step down line voltage to 24 volts for use on various pieces of heating and cooling equipment. Viega offers two different types, technical information pertaining to each is listed below.



Part Number : 18008
 Primary Voltage and frequency: 120VAC 50/60 HZ
 Secondary Voltage: 24 VAC
 Wiring Connections: 4-9" Lead Wires
 Output at 100% Power rating: 40 VA
 Over Load Protection: Energy Limited
 Mounting: 4"x4" plate mount
 Approvals: CSA Certified
 UL Component Recognized
 N.E.C. Approved

Part Number	A	B
18008	2.4"	2.6"



Part Number: 18020
 Primary Voltage and frequency: 120VAC 50/60 HZ
 Secondary Voltage: 24 VAC
 Wiring Connections: 4-12" Lead Wires
 Output at 100% Power rating: 75 VA
 Over Load Protection: Internal fused secondary
 Mounting: Foot-mounted
 Approvals: CSA Certified
 UL Component Recognized
 N.E.C. Approved

Part Number	A	B	C	D	E	F
18020	2.94"	1.75"	1.75"	2.19"	2.45"	3.13"

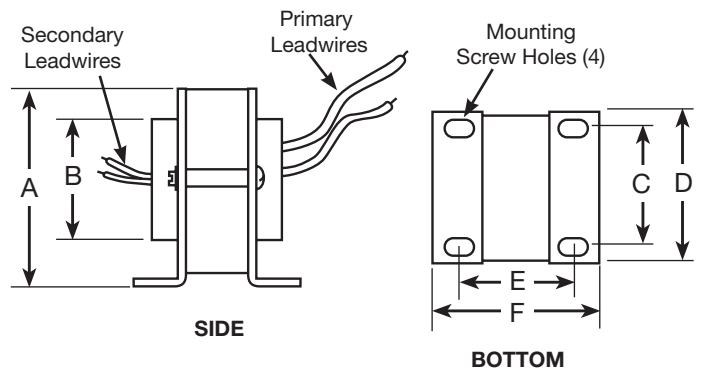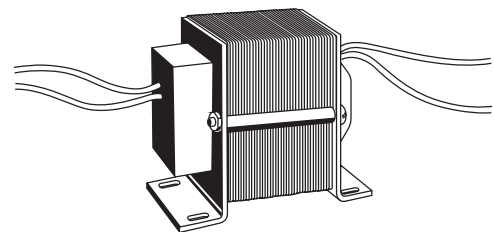

This document subject to updates. For the most current Viega technical literature please visit www.viega.us.
 Click Services -> Click Electronic Literature Downloads -> Select Product Line -> Select Desired Document