

► Code Number
3982698

► Description
Exposed Urinal Flushometer, for $\frac{3}{4}$ " top spud urinals.

► Flush Cycle
1.5 gpf / 5.7 lpf

► Specifications
Quiet, Exposed, Diaphragm Type, Chrome Plated Urinal Flushometer with the following features:


- ADA Compliant Metal Oscillating Non-Hold-Open Handle
- Control Stop Plug
- Sweat Solder Adapter with Cover Tube
- Cast Wall Flange with Set Screw
- Vacuum Breaker Flush Connection
- Spud Coupling Wall and Spud Flange for $\frac{3}{4}$ " Top Spud
- Non-Hold-Open Handle and No External Volume Adjustment to Ensure Water Conservation
- Low Consumption flush accuracy controlled by Para-Flo™ Technology
- Diaphragm, Handle Packing and Vacuum Breaker Molded from PERMEX® Rubber Compound for Chloramine Resistance
- 3/4" I.P.S. Wheel Handle Bak-Chek® Angle Stop

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance with the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.


► Variations
XYV - Valve Less Vacuum Breaker
L/FC Less Flush Connection

► Accessories (Sold Separately)
See Accessories Section of the Sloan catalog for available accessories

► Fixtures
Consult factory for matching Sloan brand fixture options.

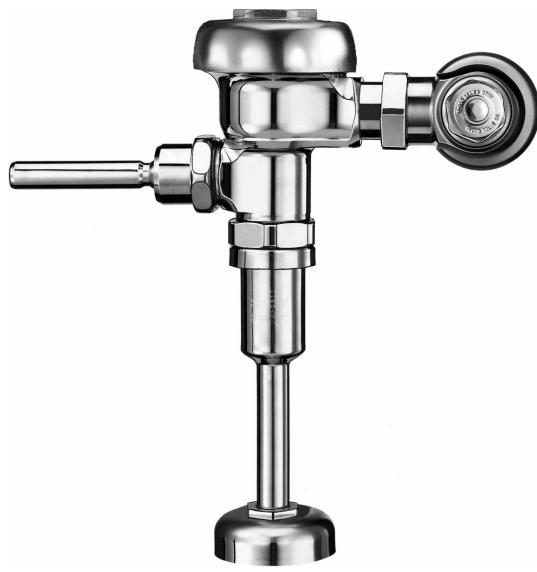

Model Regal 186 Shown

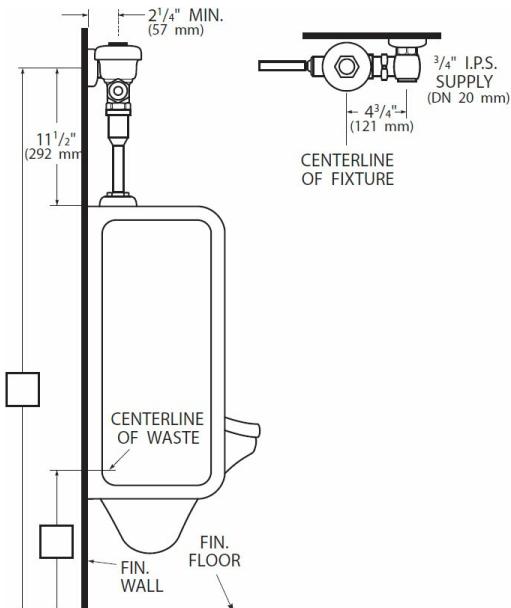

Model Regal 186 Shown

► Disclaimer

All information contained within this document subject to change without notice.

► Compliance & Certifications



Made In The
USA



HEU
HIGH-EFFICIENCY URINAL



This space for Architect/Engineer Approval