


710P-(M)T SERIES POLY-ALLOY (PPSU) CRIMP PEX FITTING - TEE

FEATURES:

- Designed for use in ASTM F2159 PEX cold and hot water distribution systems
- For use with SDR9 PEX tubing utilizing a crimp ring system
- Poly-Alloy material provides resistance to chemicals and in corrosive/aggressive water conditions
- Integral locating tabs to ensure tubing and fitting are installed properly and eliminates faulty crimp connections





SPECIFICATION:

- Max Pressure Rating: 100 PSI
- Max Temperature Rating: 180°F (82°C)
- Solvay Acudel® PPSU Polyphenylsulfone Polymer

CERTIFICATION:

- cUPC Standard ASTM F877 / F2159 & CSA B137.5 Certified
- NSF/ANSI Standard 14 & 372 Certified
- Material complies with NSF/ANSI Standard 61

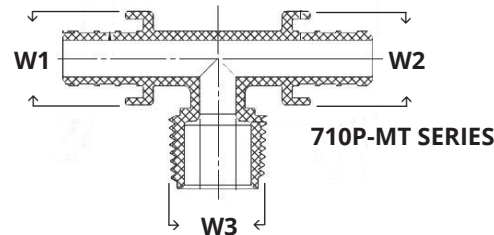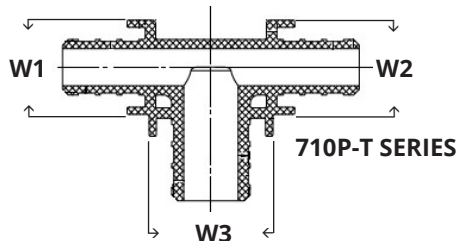





DIMENSIONS								
Part No.	Size	Weight	W1		W2		W3	
		grams	inches	mm	inches	mm	inches	mm
710P-T05	1/2"	5.98	0.68	17.27	0.68	17.27	0.68	17.27
710P-T050507	1/2" x 1/2" x 3/4"	8.32	0.68	17.27	0.68	17.27	0.93	23.62
710P-T07	3/4"	12.37	0.93	23.62	0.93	23.62	0.93	23.62
710P-T070505	3/4" x 1/2" x 1/2"	8.51	0.93	23.62	0.68	17.27	0.68	17.27
710P-T070507	3/4" x 1/2" x 3/4"	10.86	0.93	23.62	0.68	17.27	0.93	23.62
710P-T070705	3/4" x 3/4" x 1/2"	9.84	0.93	23.62	0.93	23.62	0.68	17.27
710P-T070710	3/4" x 3/4" x 1"	16.67	0.93	23.62	0.93	23.62	1.19	30.23
710P-T10	1"	23.06	1.19	30.23	1.19	30.23	1.19	30.23
710P-T100707	1" x 3/4" x 3/4"	16.38	1.19	30.23	0.93	23.62	0.93	23.62
710P-T100710	1" x 3/4" x 1"	20.62	1.19	30.23	0.93	23.62	1.19	30.23
710P-T101005	1" x 1" x 1/2"	15.88	1.19	30.23	1.19	30.23	0.68	17.27
710P-T101007	1" x 1" x 3/4"	18.90	1.19	30.23	1.19	30.23	0.93	23.62
710P-MT05	1/2" x 1/2" x 1/2" MPT	8.42	0.68	17.27	0.68	17.27	0.68	17.27

BOSHART
INDUSTRIES

25 Whaley Avenue, PO Box 310, Milverton, ON CANADA N0K 1M0
Tel: 800-561-3164

boshart.com ♦ blog.boshart.com

710P-(M)T SERIES POLY-ALLOY (PPSU) CRIMP PEX FITTING - TEE

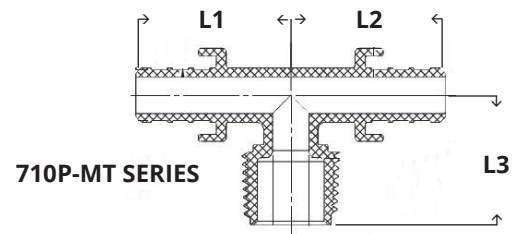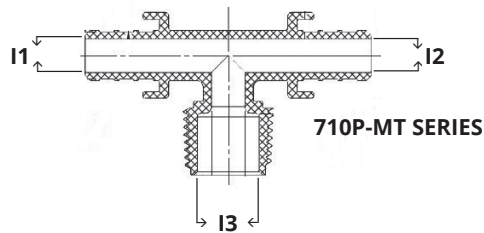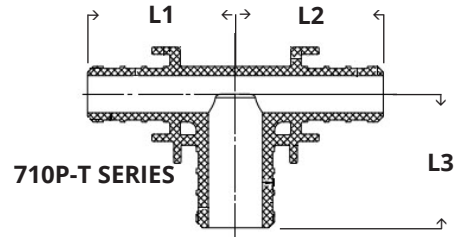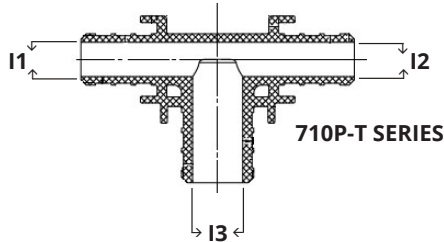

DIMENSIONS												
Part No.	I1		I2		I3		L1		L2		L3	
	inches	mm	inches	mm	inches	mm	inches	mm	inches	mm	inches	mm
710P-T05	0.32	8.08	0.32	8.08	0.32	8.08	1.14	28.88	1.14	28.88	1.14	28.88
710P-T050507	0.32	8.08	0.32	8.08	0.46	11.76	1.26	32.05	1.26	32.05	1.14	28.88
710P-T07	0.46	11.76	0.46	11.76	0.46	11.76	1.26	32.05	1.26	32.05	1.26	32.05
710P-T070505	0.46	11.76	0.32	8.08	0.32	8.08	1.14	28.88	1.14	29.03	1.26	32.05
710P-T070507	0.46	11.76	0.32	8.08	0.46	11.76	1.26	32.05	1.26	32.08	1.26	32.05
710P-T070705	0.46	11.76	0.46	11.76	0.32	8.08	1.14	28.88	1.14	28.88	1.26	32.05
710P-T070710	0.46	11.76	0.46	11.76	0.61	15.57	1.39	35.36	1.39	35.36	1.41	35.86
710P-T10	0.61	15.57	0.61	15.57	0.61	15.57	1.54	39.17	1.54	39.17	1.54	39.17
710P-T100707	0.61	15.57	0.46	11.76	0.46	11.76	1.41	35.81	1.27	32.13	1.39	35.23
710P-T100710	0.61	15.57	0.46	11.76	0.61	15.57	1.54	39.12	1.43	36.32	1.54	39.17
710P-T101005	0.61	15.57	0.61	15.57	0.44	11.13	1.29	32.69	1.29	32.69	1.39	35.36
710P-T101007	0.61	15.57	0.61	15.57	0.46	11.76	1.41	35.89	1.41	35.89	1.39	35.23
710P-MT05	0.32	8.08	0.32	8.08	0.32	8.08	1.35	34.37	1.35	34.37	1.13	28.58

BOSHART
INDUSTRIES

25 Whaley Avenue, PO Box 310, Milverton, ON CANADA N0K 1M0
Tel: 800-561-3164

boshart.com ♦ blog.boshart.com