


# PIPE/TUBE CUTTING & PREPARATION

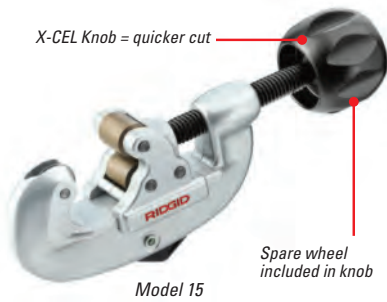


## Tubing & Conduit Cutters with New X-CEL® Features

- Clean, square cuts are easily made on copper, brass, aluminum and thin-wall conduit.
- Now includes X-CEL Knob for quicker cutting.
- Models 10, 15 and 20 feature a convenient fold-away reamer.
- Model 30 is rated for larger diameter steel and stainless steel tubing.
- Models 65S and 35S are specially designed for stainless steel tubing. Includes six individual bearings and cutter wheel to make stainless cutting easier.

Catalog No.	Model No.	Description	Std. Wheel	Capacity		Weight		Std. Pack
				in.	mm	lb.	kg	
32910	10	Tubing and Conduit Cutter	F-158	1/8-1	3-25	7/8	0,40	6
32915	10	Above w/H-D Wheel	E-1240	1/8-1	3-25	7/8	0,40	6
32920	15	Tubing and Conduit Cutter	F-158	3/16-1 1/8	5-28	1/2	0,68	6
32925	15	Above w/H-D Wheel	E-1240	3/16-1 1/8	5-28	1/2	0,68	6
32930	20	Tubing and Conduit Cutter	F-158	5/8-2 1/8	16-54	1 3/4	0,79	1
32935	20	Above w/H-D Wheel	E-1240	5/8-2 1/8	16-54	1 3/4	0,79	1
32940	30	Tubing and Conduit Cutter	E-2558	1-3 1/8	25-79	3 1/2	1,60	1
32950	30	Above w/H-D Wheel	E-2191	1-3 1/8	25-79	3 1/2	1,60	1
97212	15-SI	Stainless Steel Tubing & Conduit Cutter	E-1525	3/16-1 1/8	5-28	1 1/2	0,68	1
29963	35S	Stainless Steel Cutter	E-635	1/4-1 3/8	5-35	7/8	0,40	1
31803	65S	Stainless Steel Quick-Acting Tubing Cutter	E-635	1/4-2 1/2	6-65	1 1/2	0,68	1
29973	E635	Stainless Steel Cutter Wheel with Bearings	-	-	-	1/32	0,014	1

## Quick-Acting Tubing Cutters with New X-CEL Features

- Models 151-156 feature a quick-acting design, I-beam construction, hardened wear surfaces and thrust bearing slide assemblies for smooth operation.
- All Models now include an X-CEL Knob and X-CEL Pin for quicker cutting and wheel replacement.
- Available in models for plastic pipe or metallic tubing.
- Models 151 and 152 feature fold-away reamers.

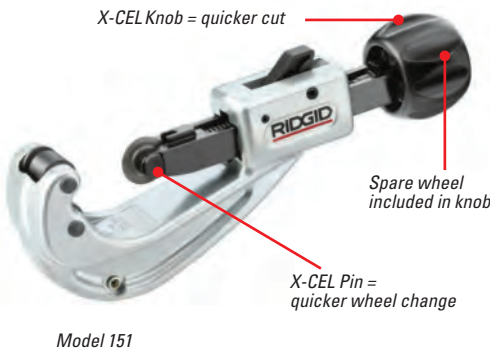

Catalog No.	Model No.	Description	Std. Wheel	Capacity		Weight		Std. Pack
				in.	mm	lb.	kg	
31632	151	Quick-Acting Cutter	E-3469	1/4-1 5/8	6-42	1 1/4	0,56	6
31637	151-P	Above w/Wheel for Plastic	E-2155	1/8-1 1/4**	10-40**	1 1/4	,056	6
31642	152	Quick-Acting Cutter	E-3469	1/4-2 5/8	6-66	2	0,92	1
31647	152-P	Above w/Wheel for Plastic	E-2155	1/4-2**	10-63**	2	0,92	1
34572	152-P	Above w/Wheel for PVC	E-5272	1/4"-2**	10-63**	2	0,92	1
36597	153	Quick-Acting Cutter	E-3469	1 1/4-3 1/2	32-90	2	0,92	1
36592	153-P	Above w/Wheel for Plastic*	E-2155	1-3**	25-75**	2	0,92	1
31652	154	Quick-Acting Cutter	E-2558	1 7/8-4 1/2	48-116	3 3/8	1,72	1
31657	154-P	Above w/Wheel for Plastic*	E-2156	1 1/2-4**	50-110**	3 3/8	1,72	1
31662	156	Quick-Acting Cutter	E-2558	4-6 5/8	100-170	5	2,23	1
31667	156-P	Above w/Wheel for Plastic*	E-2157	4-6**	110-160**	5	2,23	1
32078	151 CSST	Quick-Acting CSST Cutter	E-4546	3/8-1	9.5-25.4	1.1	0,50	6

\*Plastic models do not include a spare cutting wheel.

\*\*Nominal Plastic Pipe Size.

## RIGID® Quick-Acting plastic cutter models are equipped to easily convert to cut copper or other metallic tubing.

1. Remove spare copper cutting wheel from knob.
2. Reverse knob position so that the "Cu" notation is visible inside the knob.
3. Screw knob back on to handle.
4. Using the X-CEL Wheel Pin, you can quickly replace the existing plastic cutting wheel with the copper cutting wheel. You're now ready to cut copper, aluminum, and brass tubing.
5. When you wish to revert to plastic cutting, follow the same instructions but make sure to reposition knob so that "PE" and "PVC" notations are visible inside knob.