


# A7AC13F


Single Stage | Omniguard® Coil | R-454B | 60Hz

RESIDENTIAL  
PRODUCT SPECIFICATIONS

SEER2 13.4 to 16.0  
Cooling Capacity | 1.5 to 5 Tons

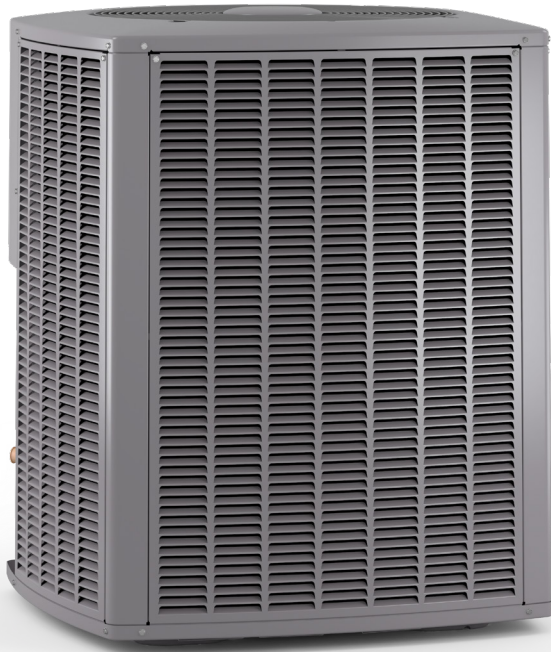

## MODEL NUMBER IDENTIFICATION

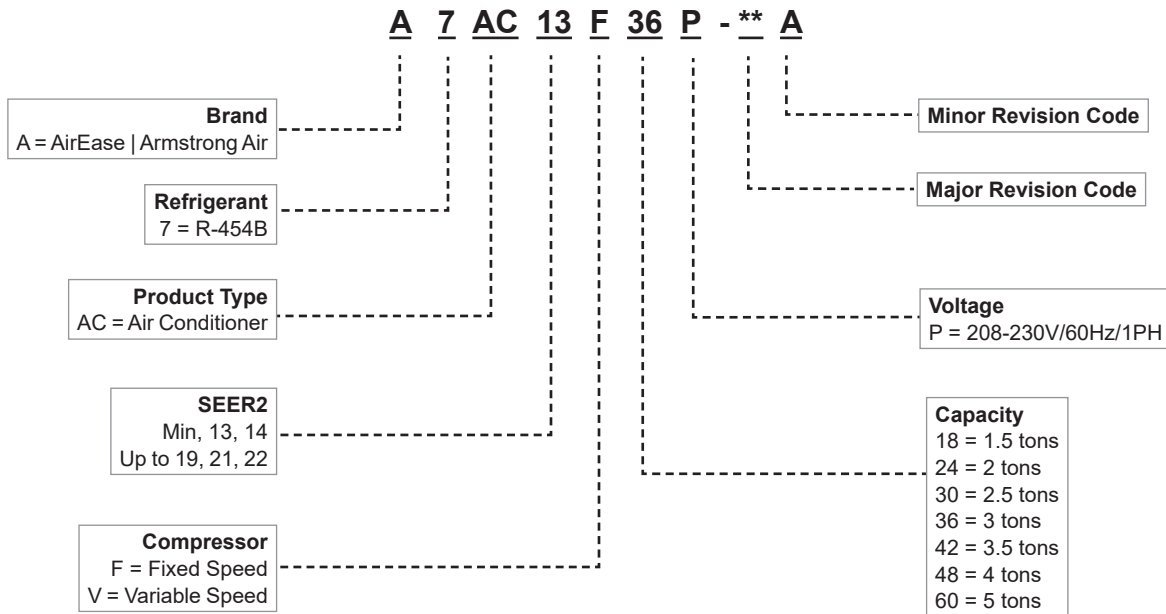

## FEATURE HIGHLIGHTS

1. Outdoor Coil Fan
2. Omniguard® Coil
3. High Capacity Liquid Line Drier
4. High and Low Pressure Switches
5. Scroll Compressor
6. Heavy Gauge Steel Cabinet
7. Louvered Coil Protection
8. Refrigerant Line Connections and Access



## CONTENTS

Model Number Identification . . . . .	1
Approvals And Warranty . . . . .	3
Features. . . . .	3
Specifications . . . . .	6
Optional Accessories - Order Separately . . . . .	6
Optional Controls - Order Separately . . . . .	7
Expanded Sound Data . . . . .	8
Field Wiring . . . . .	8
Installation Clearances . . . . .	8
Dimensions - Unit . . . . .	9
TXV Substitution . . . . .	10
TXV Usage . . . . .	10

## APPROVALS AND WARRANTY

### APPROVALS

- AHRI Standard 210/240-2023 certified
- AHRI Certified system match-ups and expanded ratings, visit [www.alliedratings.com](http://www.alliedratings.com)
- ENERGY STAR® Certified
- Sound rated to AHRI Standard 270-2008 test conditions
- Rated According to U.S. Department of Energy (DOE) test procedures
- Region specific models meet the minimum efficiency requirements for U.S. DOE Federal Regional Standards in that area
- Unit and components ETL, NEC and CEC bonded for grounding to meet safety standards for servicing
- ETL certified (U.S. and Canada)
- ISO 9001 Registered Manufacturing Quality System

### WARRANTY

10-years limited warranty on all parts, extended warranty available. Warranty provides for a total of 10-years of limited warranty. Coverage (Standard 5-year limited parts warranty plus an additional 5-year limited extended parts warranty).

Warranty must be registered online within 60 days of installation to qualify for 10-year coverage.

Unregistered equipment defaults to 5-year coverage.

See full warranty at [www.alliedair.com](http://www.alliedair.com) for terms, conditions, and exclusions.

## FEATURES

### APPLICATIONS

- 1.5 through 5 tons
- Sound levels as low as 72 dBA
- Single-phase power supply
- Vertical air discharge
- Applicable to indoor air handlers or gas furnaces with indoor add-on coils
- Shipped completely factory assembled, piped and wired
- Factory test operated

### REFRIGERATION SYSTEM

#### R-454B Refrigerant

- Low GWP (Global Warming Potential)
- Zero ODP (Ozone Depletion Potential)
- Unit is factory pre-charged

**NOTE** - Total system refrigerant charge is dependent on outdoor unit size, indoor unit size and refrigerant line length.

**NOTE** - Refer to the unit-mounted charging sticker to determine correct amount of charge required.

#### 1 Outdoor Coil Fan

- Direct drive fan
- Vertical air discharge
- Totally enclosed fan motor
- Ball bearings
- Inherently protected
- PVC (polyvinyl chloride) coated steel fan guard

#### 2 Omniguard® Coil

- Proprietary design
- Enhanced aluminum alloy tube/enhanced fin coil
- Superior corrosion resistance
- Ripple-edged aluminum fins
- Aluminum tube construction
- Lanced fins for maximum fin surface exposure
- Fin collars grip tubing for maximum contact area
- Flared shoulder tubing connections
- Factory tested under high pressure
- Entire coil is accessible for cleaning

#### 3 High Capacity Liquid Line Drier

- Furnished with unit for field installation
- Drier traps moisture or dirt that could contaminate the system
- 100% molecular-sieve, bead type, drier

#### 4 High Pressure Switch

- Protects the system from high pressure conditions that can be a result of fan failure or a blocked/dirty coil
- Automatic reset

#### Low Pressure Switch

- Shuts off unit if suction pressure falls below setting
- Provides loss of charge and freeze-up protection
- Automatic reset

## FEATURES

### REFRIGERATION SYSTEM (Continued)

#### Optional Accessories

##### **Expansion Valve Kits**

- Factory installed with R-454B on all Indoor units
- See TXV Usage table
- Chatleff-style fitting

##### **Freezestat**

- Senses suction line temperature
- Cycles compressor off when suction line temperature falls below freezestat setpoint
- Opens at 29°F and closes at 58°F
- Installs on or near the discharge line of the evaporator or on the suction line

##### **Loss of Charge Switch Kit**

- Protects compressor from damage from low refrigerant charge conditions
- SPST, normally-closed
- Automatic reset


### INDOOR REFRIGERANT DETECTION SYSTEM (RDS)

- Complies with UL 60335-2-40 approved standard
- Required for all systems using R-454B refrigerant
- Factory or field installed on all indoor units
- Consists of a RDS refrigerant detection sensor and an independent RDS control
- If refrigerant is detected the refrigerant detection system will prevent compressor and heating operation until refrigerant is no longer detected
- Refrigeration detection system also energizes the blower if refrigerant is detected to dissipate any concentrations of refrigerant from the space
- Refer to indoor unit Product Specifications documents for additional details

### COMPRESSOR

#### **5 Single-Stage Scroll Compressor**

- High volumetric efficiency
- Uniform suction flow
- Constant discharge flow
- High efficiency
- Quiet operation
- Low gas pulses during compression reduces operational sound levels
- Compressor motor is internally protected from excessive current and temperature
- Muffler in discharge line reduces operating sound levels
- Compressor is installed in the unit on resilient rubber mounts for vibration free operation

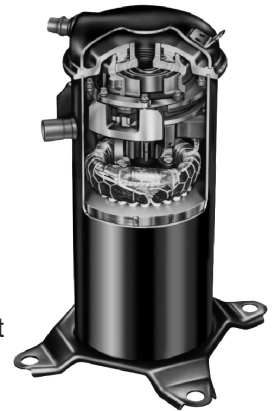

#### **Scroll Compressor Operation**

- Two involute spiral scrolls matched together generate a series of crescent-shaped gas pockets between them
- During compression, one scroll remains stationary while the other scroll orbits around it
- Gas is drawn into the outer pocket, the pocket is sealed as the scroll rotates
- As the spiral movement continues, gas pockets are pushed to the center of the scrolls. Volume between the pockets is simultaneously reduced
- When the pocket reaches the center, gas is now at high pressure and is forced out of a port located in the center of the fixed scrolls
- During compression, several pockets are compressed simultaneously resulting in a smooth continuous compression cycle
- Continuous flank contact, maintained by centrifugal force, minimizes gas leakage and maximizes efficiency
- Compressor is tolerant to the effects of slugging and contaminants. If this occurs, scrolls separate, allowing liquid or contaminants to be worked toward the center and discharged

#### **Compressor Crankcase Heater (048, 060 Models)**

- Prevents migration of liquid refrigerant into compressor and ensures proper compressor lubrication

#### **Compressor Sound Dampening System**

- Polymer outer shell
- 1/2 inch thick Polyester fiber insulation
- All open edges sealed with one-inch wide hook and loop fastening tape

## FEATURES

### COMPRESSOR (continued)

#### Optional Accessories

#### Compressor Crankcase Heater (018, 024, 030, 036, 042 Models)

- Prevents migration of liquid refrigerant into compressor and ensures proper compressor lubrication

#### Compressor Hard Start Kit

- Single-phase units are equipped with a PSC compressor motor
- This type of motor normally does not need a potential relay and start capacitor
- For conditions such as low voltage kit, may be required to increase the compressor starting torque

#### Compressor Low Ambient Cut-Off Switch

- Non-adjustable switch (low ambient cut-out)
- Prevents compressor operation when outdoor temperature is below 35°F

#### Compressor Timed-Off Control

- Prevents compressor short-cycling
- Allows time for suction and discharge pressure to equalize
- Permits compressor start-up in an unloaded condition
- Automatic reset with 5 minute delay between compressor shut-off and start-up

#### Indoor Blower Off Delay Relay

- Delays the indoor blower-off time during the cooling cycle

#### Low Ambient Kit

- Air conditioners can operate down to 45°F outdoor air temperature without additional controls
- Allows unit to operate properly down to 30°F

**NOTE** - Crankcase heater and freezestat should be installed on compressors equipped with a low ambient kit.

**NOTE** - A compressor lock-out thermostat should be added to terminate compressor operation below recommended operation conditions.

### CABINET

- 6 • Heavy-gauge steel construction
- Pre-painted cabinet finish
- Louvered heavy gauge steel panels surround unit on all four sides
- Control box is conveniently located with all controls factory wired
- Drainage holes are provided in base section for moisture removal

- 7 • **Louvered Coil Protection**

- Steel louvered panels provides complete coil protection
- Panels may be completely removed for ease of coil cleaning and service



- 8 • **Refrigerant Line Connections, Electrical Inlets and Service Valves**

- Sweat connection suction and liquid lines
- Located on corner of unit cabinet
- Suction valve can be fully shut off, while liquid valve may be front seated to manage refrigerant charge while servicing system
- Refrigerant line connections and field wiring inlets are located in one central area of the cabinet
- See dimension drawing

#### Braze-Free/Press Fitting Flexibility

- Units can accommodate braze-free or press fittings for installation versatility

SPECIFICATIONS			NORTH REGION			
Size			018	024	030	036
Nominal Tonnage			1.5	2	2.5	3
Sound Rating Number		dBA	72	73	75	78
Connections (Sweat)	Liquid line (OD) - in.		3/8	3/8	3/8	3/8
	Suction line (OD) - in.		3/4	3/4	3/4	3/4
Compressor Type			1-Stage Scroll	1-Stage Scroll	1-Stage Scroll	1-Stage Scroll
Refrigerant		<sup>1</sup> R-454B charge furnished	4 lbs. 0 oz.	4 lbs. 7 oz.	4 lbs. 14 oz.	5 lbs. 10 oz.
Indoor Unit Expansion Valve (TXV)			<b>26Z70</b>	<b>26Z70</b>	<b>26Z70</b>	<b>26Z70</b>
Outdoor Coil	Net face area - ft. <sup>2</sup>	Outer coil	11.33	13.22	16.33	18.67
		Inner coil	---	---	---	---
	Tube diameter - in.		5/16	5/16	5/16	5/16
		Rows	1	1	1	1
		Fins - in.	26	26	26	26
Outdoor Fan	HP		1/10	1/10	1/6	1/6
		Diameter - in.	18	18	22	22
	Blades		3	3	3	3
		Cfm	2290	2350	2610	2800
		Rpm	1075	1075	825	825
		Watts	150	155	160	190
Shipping Data - lbs.			140	157	171	204
ELECTRICAL DATA						
	Line voltage data (Volts-Phase-Hz)		208/230-1-60	208/230-1-60	208/230-1-60	208/230-1-60
	<sup>2</sup> Maximum overcurrent protection (MOCP) amps		15	20	25	30
	<sup>3</sup> Minimum circuit ampacity (MCA)		11.1	13.5	16.6	17.8
Compressor	Rated load amps		8.3	10.2	12.5	13.4
	Locked rotor amps		45	60.2	67.8	82.5
Fan Motor	Full load amps		0.7	0.7	1.0	1.0
	Locked rotor amps		1.3	1.3	1.9	1.9
OPTIONAL ACCESSORIES - ORDER SEPARATELY						
Compressor Crankcase Heater	Copeland	<b>27V63</b>	•	•	•	•
	LG	<b>27U16</b>	•	•	•	•
Compressor Hard Start Kit	Copeland	<b>63W22</b>	•			
		<b>10J42</b>		•	•	•
	LG	<b>10J42</b>	•	•	•	•
Compressor Low Ambient Cut-Off Switch		<b>45F08</b>	•	•	•	•
Compressor Timed-Off Control		<b>47J27</b>	•	•	•	•
Freezestat	3/8 in.	<b>93G35</b>	•	•	•	•
Indoor Blower Off Delay Relay		<b>58M81</b>	•	•	•	•
Loss of Charge Switch Kit		<b>84M23</b>	•	•	•	•
<sup>4</sup> Low Ambient Kit (Fan Cycling)		<b>34M72</b>	•	•	•	•

NOTE - Extremes of operating range are plus 10% and minus 5% of line voltage.

<sup>1</sup> Refrigerant charge sufficient for 15 ft. length of refrigerant lines. For longer line set requirements see the Installation Instructions for information about line set length and additional refrigerant charge required.

<sup>2</sup> HACR type breaker or fuse.

<sup>3</sup> Refer to National or Canadian Electrical Code manual to determine wire, fuse and disconnect size requirements.

<sup>4</sup> Crankcase Heater and Freezestat are recommended with Low Ambient Kit.

SPECIFICATIONS				NORTH REGION		
<b>Size</b>			<b>042</b>	<b>048</b>	<b>060</b>	
<b>Nominal Tonnage</b>			3.5	4	5	
<b>Sound Rating Number</b>		dBA	77	80	78	
<b>Connections (Sweat)</b>	Liquid line (OD) - in.		3/8	3/8	3/8	
	Suction line (OD) - in.		3/4	7/8	1-1/8	
<b>Compressor Type</b>			1-Stage Scroll	1-Stage Scroll	1-Stage Scroll	
<b>Refrigerant</b>		<sup>1</sup> R-454B charge furnished	5 lbs. 15 oz.	7 lbs. 10 oz.	8 lbs. 8 oz.	
<b>Indoor Unit Expansion Valve (TXV)</b>			<b>26Z71</b>	<b>26Z71</b>	<b>26Z72</b>	
<b>Outdoor Coil</b>	Net face area - ft. <sup>2</sup>	Outer coil	21.00	16.33	21.00	
		Inner coil	- - -	16.33	20.25	
		Tube diameter - in.	5/16	5/16	5/16	
		Rows	1	2	2	
		Fins - in.	26	22	22	
<b>Outdoor Fan</b>		HP	1/3	1/4	1/4	
		Diameter - in.	22	22	22	
		Blades	3	3	4	
		Cfm	2985	2875	3250	
		Rpm	825	825	845	
		Watts	150	160	280	
<b>Shipping Data - lbs.</b>			212	231	263	
ELECTRICAL DATA						
	Line voltage data (Volts-Phase-Hz)		208/230-1-60	208/230-1-60	208/230-1-60	
	<sup>2</sup> Maximum overcurrent protection (MOCP) amps		35	40	50	
	<sup>3</sup> Minimum circuit ampacity (MCA)		21.2	24.3	31.3	
<b>Compressor</b>	Rated load amps		14.9	18.0	23.7	
	Locked rotor amps		109	126	157	
<b>Fan Motor</b>	Full load amps		2.6	1.7	1.7	
	Locked rotor amps		- - -	3.2	3.2	
OPTIONAL ACCESSORIES - ORDER SEPARATELY						
<b>Compressor</b>	Copeland	<b>27P59</b>	•	Factory Installed	Factory Installed	
<b>Crankcase Heater</b>	LG	<b>27U16</b>	•	Factory Installed	Factory Installed	
<b>Compressor Hard Start Kit</b>	Copeland	<b>10J42</b>	•	•	•	
	LG	<b>88M91</b>	•	•	•	
<b>Compressor Low Ambient Cut-Off Switch</b>		<b>45F08</b>	•	•	•	
<b>Compressor Timed-Off Control</b>		<b>47J35</b>	•	•	•	
<b>Freezestat</b>	3/8 in.	<b>93G35</b>	•	•	•	
<b>Indoor Blower Off Delay Relay</b>		<b>58M81</b>	•	•	•	
<b>Loss of Charge Switch Kit</b>		<b>84M23</b>	•	•	•	
<sup>4</sup> <b>Low Ambient Kit (Fan Cycling)</b>		<b>34M72</b>	•	•	•	

NOTE - Extremes of operating range are plus 10% and minus 5% of line voltage.

<sup>1</sup> Refrigerant charge sufficient for 15 ft. length of refrigerant lines. For longer line set requirements see the Installation Instructions for information about line set length and additional refrigerant charge required.

<sup>2</sup> HACR type breaker or fuse.

<sup>3</sup> Refer to National or Canadian Electrical Code manual to determine wire, fuse and disconnect size requirements.

<sup>4</sup> Crankcase Heater and Freezestat are recommended with Low Ambient Kit.

## EXPANDED SOUND DATA


Size	Octave Band Sound Power Levels dBA, re 10 <sup>-12</sup> Watts Center Frequency - Hz							<sup>1</sup> Sound Rating Number (dBA)	<sup>2</sup> Estimated Sound Pressure Level at Distance From Unit (dBA at distance in ft.)				
	125	250	500	1000	2000	4000	8000		3	5	10	15	50
018	54	59	65.5	69	65	59	51	72	65	60	54	51	40
024	53	58.5	66.5	69.5	65	62.5	54.5	73	66	61	55	52	41
030	55	63.5	69	71.5	65.5	61	56	75	68	63	57	54	43
036	61.5	68	73.5	72.5	69	64	56.5	78	71	66	60	57	46
042	62	69.5	73	71	69	63.5	55	77	70	65	59	56	45
048	61	69	76	74	70.5	65.5	58	80	73	68	62	59	48
060	61.5	68	73.5	72.5	69	64	56.5	78	71	66	60	57	46

NOTE - The octave sound power data does not include tonal correction.

<sup>1</sup> Tested according to AHRI Standard 270-2008 test conditions.


<sup>2</sup> Estimated sound pressure level at distance based on AHRI Standard 275-2010 method for equipment located on the ground, roof, or on side of building wall with no adjacent reflective surface within 9.8 feet. Sound pressure levels will increase based on changes to assumptions. For other applications, refer to AHRI Standard 275.

## FIELD WIRING

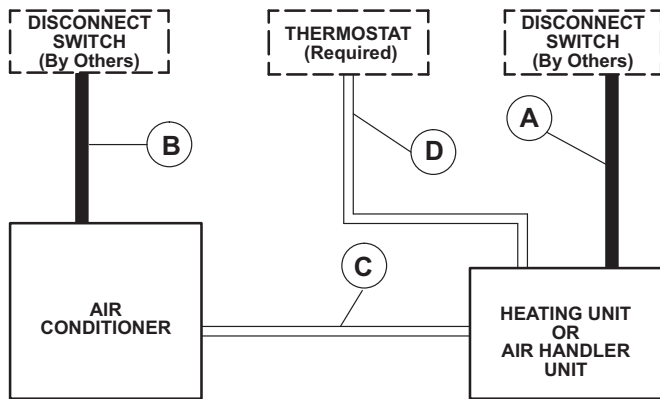

- A - Two Wire Power (not furnished)
  - B - Two Power (not furnished). See Electrical Data
  - C - Four Wire Low Voltage (not furnished). 18 ga. minimum
  - D - Five Wire Low Voltage (not furnished). 18 ga. minimum
- All wiring must conform to NEC or CEC and local electrical codes.*

## INSTALLATION CLEARANCES

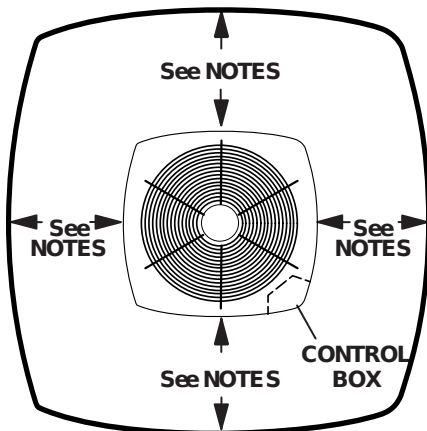

### Notes

Service clearance of 30 in. (762 mm) must be maintained on one of the sides adjacent to the control box.

Clearance to one of the other three sides must be 36 in. (914 mm).


Clearance to one of the remaining two sides may be 12 in. (305 mm) and the final side may be 6 in. (152 mm).

A clearance of 24 in. must be maintained between two units. 48 in. (1219 mm) clearance required on top of unit.

**Notice:** Specific applications may require adjustment of the listed installation clearances to provide protection for the unit from physical damage or to avoid conditions which limit operating efficiency. (Example: Clearances may have to be increased to prevent snow or ice from falling on the top of the unit. Additional clearances may also be required to prevent air recirculation when the unit is installed under a desk or in another tight space.)



**DIMENSIONS - UNIT**

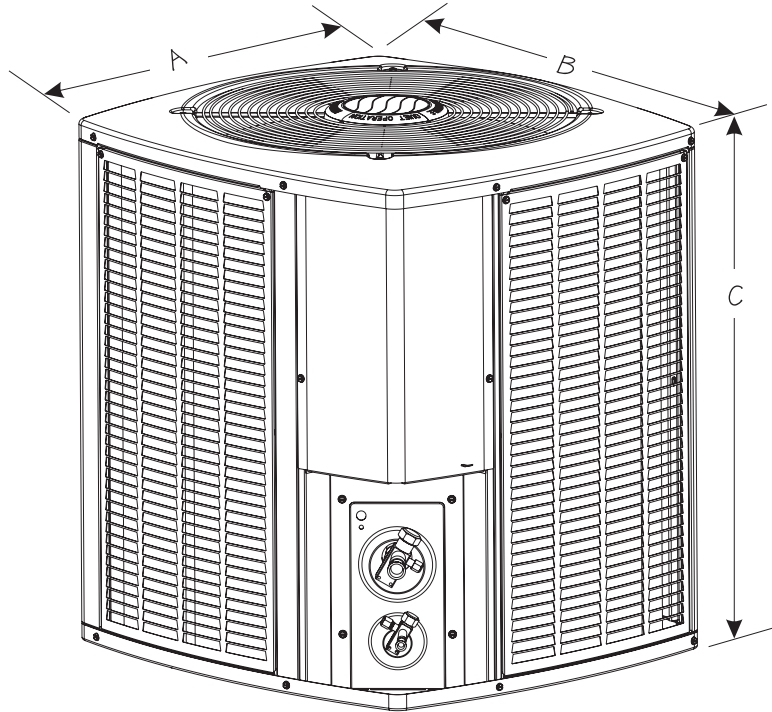

Size	A (Width)		B (Depth)		C (Height)	
	in.	mm	in.	mm	in.	mm
018	24-3/4	629	26-3/4	679	25-3/4	654
024	24-3/4	629	26-3/4	679	29-3/4	756
030	29-3/8	746	26-3/4	794	29-3/4	756
036	29-3/8	746	26-3/4	794	33-3/4	857
042	29-3/8	746	26-3/4	794	37-3/4	959
048	29-3/8	746	26-3/4	794	29-3/4	857
060	29-3/8	746	26-3/4	794	37-3/4	959

## TXV USAGE

All Allied coils and air handlers are shipped with a factory installed TXV. In most cases, no substitution is needed. If a different size TXV is required, it will be listed in the "TXV SUBSTITUTION" table by size. The correct TXV must be ordered separately and field installed.

Size	Order Number
018	<b>26Z70</b>
024	<b>26Z70</b>
030	<b>26Z70</b>
036	<b>26Z70</b>
042	<b>26Z71</b>
048	<b>26Z71</b>
060	<b>26Z72</b>

## AHRI STANDARD 210-240-2023

Standard Ratings relating to cooling or heating capacities shall be net values, including the effects of circulating-fan heat, but not including supplementary electric heat. Power input used for calculating efficiency shall be the Total Power.

Standard Ratings of units which do not have indoor air-circulating fans furnished as part of the model, i.e., Coil-only System, shall be established by subtracting from the total cooling capacity 1,505 Btu/h per 1,000 SCFM, and by adding the same amount to the heating capacity for non-mobile-home, non-Space Constrained units. Total Power for both heating and cooling shall be increased by 441 W per 1,000 SCFM of indoor air circulated.

## TXV SUBSTITUTION - R-454B

A general guide for replacing the factory installed R-454B TXV if the indoor unit (coil/air handler) is larger or smaller than the outdoor unit.

Outdoor Unit		Indoor Unit		Indoor TXV Furnished	Indoor TXV Replacement
Size	Tons	Size	Tons		
018	1.5	42	3.5	<b>26Z71</b>	<b>26Z70</b>
018	1.5	48	4	<b>26Z71</b>	<b>26Z70</b>
018	1.5	49	4	<b>26Z71</b>	<b>26Z70</b>
018	1.5	50/60	4/5	<b>26Z71</b>	<b>26Z70</b>
018	1.5	51/61	4/5	<b>26Z71</b>	<b>26Z70</b>
018	1.5	60	5	<b>26Z72</b>	<b>26Z70</b>
024	2	42	3.5	<b>26Z71</b>	<b>26Z70</b>
024	2	48	4	<b>26Z71</b>	<b>26Z70</b>
024	2	49	4	<b>26Z71</b>	<b>26Z70</b>
024	2	50/60	4/5	<b>26Z71</b>	<b>26Z70</b>
024	2	51/61	4/5	<b>26Z71</b>	<b>26Z70</b>
024	2	60	5	<b>26Z72</b>	<b>26Z70</b>
030	2.5	42	3.5	<b>26Z71</b>	<b>26Z70</b>
030	2.5	48	4	<b>26Z71</b>	<b>26Z70</b>
030	2.5	49	4	<b>26Z71</b>	<b>26Z70</b>
030	2.5	50/60	4/5	<b>26Z71</b>	<b>26Z70</b>
030	2.5	51/61	4/5	<b>26Z71</b>	<b>26Z70</b>
030	2.5	60	5	<b>26Z71</b>	<b>26Z70</b>
036	3	42	3.5	<b>26Z71</b>	<b>26Z70</b>
036	3	48	4	<b>26Z71</b>	<b>26Z70</b>
036	3	49	4	<b>26Z71</b>	<b>26Z70</b>
036	3	50/60	4/5	<b>26Z71</b>	<b>26Z70</b>
036	3	51/61	4/5	<b>26Z71</b>	<b>26Z70</b>
036	3	60	5	<b>26Z72</b>	<b>26Z70</b>
042	3.5	24	2	<b>26Z70</b>	<b>26Z71</b>
042	3.5	30	2.5	<b>26Z70</b>	<b>26Z71</b>
042	3.5	30/36	2.5/3	<b>26Z70</b>	<b>26Z71</b>
042	3.5	36	3	<b>26Z70</b>	<b>26Z71</b>
042	3.5	60	5	<b>26Z72</b>	<b>26Z71</b>
048	4	30/36	2.5/3	<b>26Z70</b>	<b>26Z71</b>
048	4	36	3	<b>26Z70</b>	<b>26Z71</b>
048	4	60	5	<b>26Z72</b>	<b>26Z71</b>
060	5	50/60	4/5	<b>26Z71</b>	<b>26Z72</b>
060	5	51/61	4/5	<b>26Z71</b>	<b>26Z72</b>

### TXV Ranges:

**26Z70** - 1.5 to 3 ton systems - Use on 3 ton (036) and lower systems.

**26Z71** - 3.5-4 ton systems - Use on to 4 ton (048) and down to 3.5 ton (042) systems.

**26Z72** - 5 ton systems - Use on 5 ton (060) systems only.



Visit us at [www.alliedair.com](http://www.alliedair.com)  
Contact us at 1-800-448-5872

**NOTE** - Due to our ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency.

©2024 Allied Air Enterprises.