

**distinctions**



# PTAC Made Simple



**Traditional experience,  
premium comfort**

With **Distinctions** PTAC units, you have a reliable and high-quality option—while your guests enjoy ideal comfort.

**distinctions**

[DISTINCTIONS-PTAC.COM](http://DISTINCTIONS-PTAC.COM)

# distinctions



Model		DCP 073J25BA	DCP 073J35BA	DCP 093J25BA	DCP 093J35BA	DCP 093J50BA	DCP 123J25BA	DCP 123J35BA	DCP 123J50BA	DCP 153J35BA	DCP 153J50BA
<b>COOLING</b>											
Voltage	V	208 / 230	208 / 230	208 / 230	208 / 230	208 / 230	208 / 230	208 / 230	208 / 230	208 / 230	208 / 230
Capacity	Btu/h	7,300 / 7,200	7,300 / 7,200	9,200 / 9,000	9,200 / 9,000	9,200 / 9,000	12,000 / 11,800	12,000 / 11,800	12,000 / 11,800	14,700 / 14,500	14,700 / 14,500
Amps	A	3.1 / 3.4	3.1 / 3.4	4.3 / 4.9	4.3 / 4.9	4.3 / 4.9	5.5 / 6.1	5.5 / 6.1	5.5 / 6.1	7.5 / 8.9	7.5 / 8.9
Watts	W	560 / 550	560 / 550	790 / 780	790 / 780	790 / 780	1,080 / 1,060	1,080 / 1,060	1,080 / 1,060	1,390 / 1,370	1,390 / 1,370
EER	Btu/h/W	13.1	13.1	11.3	11.3	11.3	10.7	10.7	10.7	10.6	10.6
CFM (Cool/Wet Coil) High Speed		346	346	430	430	430	431	431	431	430	430
CFM (Cool/Wet Coil) Low Speed		285	285	342	342	342	348	348	348	349	349
CFM (DRY) High Speed		346	346	430	430	430	431	431	431	430	430
CFM (DRY) Low Speed		285	285	342	342	342	348	348	348	349	349
<b>UNIVERSAL</b>											
Vent Door CFM		61.1 / 57.6 / 50.6	61.1 / 57.6 / 50.6	61.1 / 57.6 / 50.6	61.1 / 57.6 / 50.6	61.1 / 57.6 / 50.6	62 / 60 / 56	62 / 60 / 56	62 / 60 / 56	62 / 60 / 56	62 / 60 / 56
Dehumidification (Pints/Hr)		0.63	0.63	1.18	1.18	1.18	2.85	2.85	2.85	4.55	4.55
Net Weight	lbs	98.1	98.1	97	97	97	103.62	103.62	103.62	105.82	105.82
Ship Weight	lbs	106.92	106.92	105.82	105.82	105.82	112.43	112.43	112.43	114.64	114.64
<b>ELECTRIC HEAT</b>											
Voltage	V	208 / 230	208 / 230	208 / 230	208 / 230	208 / 230	208 / 230	208 / 230	208 / 230	208 / 230	208 / 230
Heater Size (kW)		2.5	3.5	2.5	3.5	5.0	2.5	3.5	5.0	3.5	5.0
Heating Capacity	Btu/h	7,800 / 6,300	10,900 / 8,900	7,800 / 6,300	10,900 / 8,900	15,000 / 12,200	7,800 / 6,300	10,900 / 8,900	15,000 / 12,200	10,900 / 8,900	15,000 / 12,200
Watts	W	2,580 / 2,150	3,500 / 2,897	2,580 / 2,150	3,500 / 2,897	5,000 / 4,100	2,580 / 2,150	3,500 / 2,897	5,000 / 4,100	3,500 / 2,897	5,000 / 4,100
Amps	A	11.3 / 10.3	15.3 / 13.7	11.3 / 10.3	15.3 / 13.7	22.3 / 20.1	11.3 / 10.3	14.96 / 13.7	22.3 / 20.1	15.3 / 13.7	22.3 / 20.1

distinctions

DISTINCTIONS-PTAC.COM



Model		DHP 073J25BA	DHP 073J35BA	DHP 093J25BA	DHP 093J35BA	DHP 093J50BA	DHP 123J25BA	DHP 123J35BA	DHP 123J50BA	DHP 153J35BA	DHP 153J50BA	DHP 074J35BA	DHP 094J35BA	DHP 124J35BA	DHP 154J35BA		
<b>COOLING</b>		<b>COOLING</b>															
Voltage	V	208 / 230	208 / 230	208 / 230	208 / 230	208 / 230	208 / 230	208 / 230	208 / 230	208 / 230	208 / 230	265	265	265	265		
Capacity	Btu/h	7,200 / 7,100	7,200 / 7,100	9,300 / 9,200	9,300 / 9,200	9,300 / 9,200	12,000 / 11,800	12,000 / 11,800	14,700 / 14,500	14,700 / 14,500	14,700 / 14,500	7,200	9,000	12,000	14,700		
Amps	A	3.0 / 3.3	3.0 / 3.3	4.2 / 4.6	4.2 / 4.6	4.2 / 4.6	5.3 / 5.8	5.3 / 5.8	5.3 / 5.8	5.3 / 5.8	5.3 / 5.8	6.5 / 7.4	6.5 / 7.4	2.3	3.9	5.3	5.8
Watts	W	550 / 540	550 / 540	820 / 810	820 / 810	820 / 810	1,040 / 1020	1,040 / 1020	1,390 / 1,370	1,390 / 1,370	1,390 / 1,370	605	770	1,130	1,535		
EER	Btu/h/W	13.1	13.1	11.4	11.4	11.4	10.5	10.5	10.5	10.6	10.6	11.9	11.3	10.5	9.6		
CFM (Cool/Wet Coil) High Speed		355	355	363	363	363	438	438	438	416	416	398	389	434	434		
CFM (Cool/Wet Coil) Low Speed		295	295	300	300	300	344	344	344	330	330	337	328	352	352		
CFM (DRY) High Speed		355	355	363	363	363	438	438	438	416	416	398	389	434	434		
CFM (DRY) Low Speed		295	295	300	300	300	344	344	344	330	330	337	328	352	352		
<b>UNIVERSAL</b>																	
Vent Door CFM		61.1 / 57.6 / 50.6	61.1 / 57.6 / 50.6	61.1 / 57.6 / 50.6	61.1 / 57.6 / 50.6	61.1 / 57.6 / 50.6	62 / 60 / 56	62 / 60 / 56	62 / 60 / 56	62 / 60 / 56	62 / 60 / 56	61.1 / 57.6 / 50.6	61.1 / 57.6 / 50.6	62 / 60 / 56	62 / 60 / 56		
Dehumidification (Pints/Hr)		0.70	0.70	1.14	1.14	1.14	2.85	2.85	2.85	4.33	4.33	0.70	1.16	3.17	4.55		
Net Weight	lbs	101.41	101.41	99.21	99.21	99.21	110.23	110.23	110.23	113.54	113.54	94.8	99.21	105.82	109.13		
Ship Weight	lbs	110.23	110.23	108.03	108.03	108.03	119.05	119.05	119.05	122.36	122.36	103.62	108.03	114.64	117.95		
<b>ELECTRIC HEAT</b>																	
Voltage	V	208 / 230	208 / 230	208 / 230	208 / 230	208 / 230	208 / 230	208 / 230	208 / 230	208 / 230	208 / 230	265	265	265	265		
Heater Size (kW)		2.5	3.5	2.5	3.5	5.0	2.5	3.5	5.0	3.5	5.0	3.5	3.5	3.5	3.5		
Heating Capacity	Btu/h	7,800 / 6,300	10,900 / 8,900	7,800 / 6,300	10,900 / 8,900	15,000 / 12,200	7,800 / 6,300	10,900 / 8,900	15,000 / 12,200	10,900 / 8,900	15,000 / 12,200	10,900	10,900	10,900	10,900		
Watts	W	2,580 / 2,150	3,500 / 2,897	2,580 / 2,150	3,500 / 2,897	5,000 / 4,100	2,580 / 2,150	3,500 / 2,897	5,000 / 4,100	3,500 / 2,897	5,000 / 4,100	3,500	3,500	3,500	3,500		
Amps	A	11.3 / 10.3	15.3 / 13.7	11.3 / 10.3	15.3 / 13.7	22.3 / 20.1	11.3 / 10.3	15.3 / 13.7	22.3 / 20.1	15.3 / 13.7	22.3 / 20.1	13.2	13.2	13.2	13.2		
<b>REVERSE CYCLE</b>																	
Voltage	V	208 / 230	208 / 230	208 / 230	208 / 230	208 / 230	208 / 230	208 / 230	208 / 230	208 / 230	208 / 230	265	265	265	265		
Capacity	Btu/h	6,200 / 6,000	6,200 / 6,000	8,100 / 7,900	8,100 / 7,900	8,100 / 7,900	10,800 / 10,500	10,800 / 10,500	10,800 / 10,500	13,500 / 13,200	13,500 / 13,200	6,000	8,000	10,800	13,300		
Amps	A	2.6 / 2.7	2.6 / 2.7	3.9 / 4.3	3.9 / 4.3	3.9 / 4.3	5.0 / 5.3	5.0 / 5.3	5.0 / 5.3	6.0 / 6.4	6.0 / 6.4	2.0	2.9	5.1	5.0		
Watts	W	480 / 460	480 / 460	720 / 690	720 / 690	720 / 690	890 / 850	890 / 850	890 / 850	1,170 / 1,120	1,170 / 1,120	520	620	970	1,300		
COP (DRY) High Speed	W/W	3.60	3.60	3.40	3.40	3.40	3.2	3.2	3.2	3.20	3.20	3.40	3.3	3.2	3.00		



## Sales, Support and Service You Can Trust

**Five-Year Limited Warranty:** Enjoy one of the most comprehensive warranties in the industry: First Year: parts & labor; Second through fifth years: parts & labor on certain sealed system components; second through fifth years: on certain functional parts only. For complete warranty details, visit [www.distinctions-ptac.com](http://www.distinctions-ptac.com).

**Distinctions** PTAC are stocked and sold from the same warehouse as the **Amana® Brand** PTAC products you have come to love over the years.

## Features

**R-32 Refrigerant:** 68% lower Global Warming Potential (GWP) and can reduce direct emissions from refrigerant by up to 73.6% as compared to R-410A

**Dual Fan Motors:** Allows precise independent fan speed while providing quiet operation.

**LCDI Power Cord Included:** No need to match power cord type to unit size.

**3-Speed Fan:** Provide precise comfort control to your guests.

**Constant Fan:** Take advantage of each unit's dual options—select continuous fan operation or cycle the fan ON and OFF with the thermostat. Our 7-button design allows guests to select fan.

**Wired Thermostat Compatible:** Temperature limiting for additional energy savings.

## Advantages

**Energy Efficiencies:** With EERs up to 13.1 and COPs up to 3.4, our unit's high efficiencies may qualify you for many of the rebates offered by electrical power companies.

**Automatic Emergency Heat:** No more "my unit is not heating" complaints during the middle of the night. Heat pump units will automatically switch over to electric resistance heat if the heat pump compressor system fails or if the heating load is greater than the unit capacity.

**Easy Pull-Out Filters:** Our filters are washable and easy to maintain.

**Condensate Dispersion System:** Our condensate dispersion system removes condensate from indoor cooling operation by throwing water directly on to the outdoor coil for rapid evaporation and increased cooling efficiencies.

**Call your Distinctions Brand PTAC sales representative at 800.647.2982 for complete details.**

Before purchasing this appliance, read important information available from your retailer about its estimated annual energy consumption, yearly operating cost or energy efficiency rating.

Amana® is a registered trademark of Maytag Corporation or its related companies and is used under license. All rights reserved.



Our continuing commitment to quality products may mean a change in specifications without notice.  
©2025 Daikin Comfort Technologies Manufacturing L.P. • Houston, Texas • Printed in the USA.

CB-PTAC-DIST 08-2025


# Architectural Extruded Aluminum Grilles




## Standard Color Chart

### \*Stocked Color

Custom colors, sizes and finishes are available on request.



2521 QUIET WHITE \*




438 WHITE \*




11356 STONEWOOD \*



3005 DARK BRONZE \*



3006 OFF WHITE

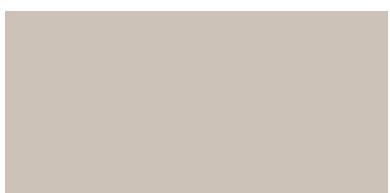


3009 WHITE STONE




2781 DRIFTWOOD



3007 LITE BRONZE

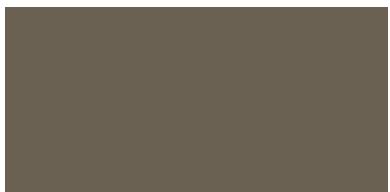

3008 MEDIUM BRONZE



3012 SLATE GRAY



3010 BRICK RED 3



3011 BRICK RED 1



CLEAR ANODIZED ALUMINUM \*

Daikin Comfort Technologies North America, Inc. cannot guarantee exact color tones due to variances in paint lots and lighting conditions. The sample colors represented here are as close to the actual colors offered, within the limitations of color chip reproduction. Please contact your Sales Representative for details, lead times and quotes.

Daikin Comfort Technologies North America, Inc. – 19001 Kermier Rd., Waller, TX 77484

Amana® is a registered trademark of Maytag Corporation or its related companies and is used under license. All rights reserved.

Copyright © 2023 Daikin Comfort Technologies Manufacturing, L.P.